

Test of Aruba AP-70 802.11 a/b/g Wireless AP

To: FCC 47 CFR Part15.247

Test Report Serial No.: ARUB13-A2 Rev A





Test of Aruba AP-70 802.11 a/b/g Wireless AP
to
To FCC 47 CFR Part15.247

Test Report Serial No.: ARUB13-A2 Rev A

Note: this report only contains data with regards to the 2.4 and 5.8 GHz operational modes of the Aruba Networks AP-70 Wireless Access Point. 5150-5350 MHz and 5,470-5,725 MHz test data is reported in MiCOM Labs test report ARUB13-A4

This report supersedes: None

Manufacturer: Aruba Networks
1322 Crossman Avenue
Sunnyvale
CA 94089, USA

Product Function: 802.11 a/b/g Wireless Access Point

Copy No: pdf **Issue Date:** 20th July 2007

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 3 of 133

This page has been left intentionally blank



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 4 of 133

TABLE OF CONTENTS

ACCREDITATION & LISTINGS.....	5
1. TEST RESULT CERTIFICATE	8
2. REFERENCES AND MEASUREMENT UNCERTAINTY	9
2.1. Normative References	9
2.2. Test and Uncertainty Procedures	9
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	10
3.1. Technical Details	10
3.2. Scope of Test Program.....	11
3.3. Equipment Model(s) and Serial Number(s)	13
3.4. Antenna Details	13
3.5. Cabling and I/O Ports	13
3.6. Test Configurations.....	14
3.7. Equipment Modifications.....	15
3.8. Deviations from the Test Standard	15
3.9. Subcontracted Testing or Third Party Data	15
4. TEST SUMMARY	16
5. TEST RESULTS	18
5.1. Device Characteristics	18
5.1.1. 6 dB and 99 % Bandwidth.....	18
5.1.2. Peak Output Power	29
5.1.3. Peak Power Spectral Density.....	40
5.1.4. Maximum Permissible Exposure	51
5.1.5. Conducted Spurious Emissions	52
5.1.6. Radiated Emissions	78
5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz).....	126
6. PHOTOGRAPHS.....	129
6.1. Radiated Spurious Emissions.....	129
6.2. AC Wireline Emissions (150 kHz - 30 MHz)	130
6.3. General Measurement Test Set-Up.....	131
7. TEST EQUIPMENT DETAILS.....	132

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 5 of 133

ACCREDITATION & LISTINGS

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



THE AMERICAN
ASSOCIATION
FOR LABORATORY
ACCREDITATION

ACCREDITED LABORATORY

A2LA has accredited

MICOM LABS
Pleasanton, CA


for technical competence in the field of

Electrical Testing

The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing.

Presented this 14th day of September 2005.




President
For the Accreditation Council
Certificate Number 2381.01
Valid to: November 30, 2007

For tests or types of tests to which this accreditation applies,
please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 6 of 133

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

RECOGNITION

APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)

Conformity Assessment Body (CAB) – MiCOM Labs

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

Country	Recognition Body	Phase	CAB Identification No.
Australia	Australian Communications and Media Authority (ACMA)	I	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	I	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	I	
Singapore	Infocomm Development Authority (IDA)	I	
Taiwan	Directorate General of Telecommunications (DGT)	I	
	Bureau of Standards, Metrology and Inspection (BSMI)	I	

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 7 of 133

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	20 th July 2007	Initial Release

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 8 of 133

1. TEST RESULT CERTIFICATE

Manufacturer:	Aruba Networks 1322 Crossman Avenue Sunnyvale CA 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	Wireless Access Point	Telephone:	+1 925 462 0304
Model:	AP-70	Fax:	+1 925 462 0306
S/N:	A50137434 (conducted) A50137415 (radiated)		
Test Date(s):	6th to 15th July 2007	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part15.247	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

Graeme Grieve
Quality Manager MiCOM Labs,

Gordon Hurst
President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.247	Feb 2006	Code of Federal Regulations
(ii)	ANSI C63.4	2003	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(iii)	CISPR 22/ EN 55022	1997 1998	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(iv)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(v)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(vi)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(vii)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 10 of 133

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Aruba AP-70 802.11 a/b/g Wireless AP to FCC Part 15.247.
Applicant:	As Manufacturer
Manufacturer:	Aruba Networks 1322 Crossman Avenue Sunnyvale CA 94089, USA
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	ARUB13-A2 Rev A
Date EUT received:	6 TH July 2006
Standard(s) applied:	FCC 47 CFR Part15.247
Dates of test (from - to):	6th to 15th July 2007
No of Units Tested:	1
Type of Equipment:	802.11a/b/g Wireless Access Point
Manufacturers Trade Name:	Wireless Access Point
Model:	AP-70
Location for use:	Indoor
Declared Frequency Range(s):	2400 - 2483.5 MHz 5725 - 5850 MHz
Type of Modulation:	Per 802.11 – DSSS, CCK, OFDM
Declared Nominal Output Power:	802.11b: +17 dBm 802.11g: +16 dBm 802.11a: +16 dBm
EUT Modes of Operation:	802.11a/b/g
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	5 Vdc, 3 A
Operating Temperature Range:	Declared range 0 to +50°C
ITU Emission Designator:	802.11b – 15M6W7D 802.11g – 16M8W7D 802.11a – 17M1W7D
Frequency Stability:	±20 ppm max
Equipment Dimensions:	6.57" x 7.348" x 1.18"
Weight:	18oz (510 grams)
Primary function of equipment:	Wireless Access Point


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.2. Scope of Test Program

The scope of the test program was to test the Aruba Networks AP-70 wireless Access Point in the frequency ranges 2400 - 2483.5 MHz, and 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247.

The Aruba Networks access point has two independent transmitters. System identifies antennas as primary and secondary devices. A maximum of two transmitters can operate at any given time, one operating in either b or g mode (2.4 GHz) and the other in a mode (5 GHz band)

Aruba Networks AP-70 Wireless Access Point

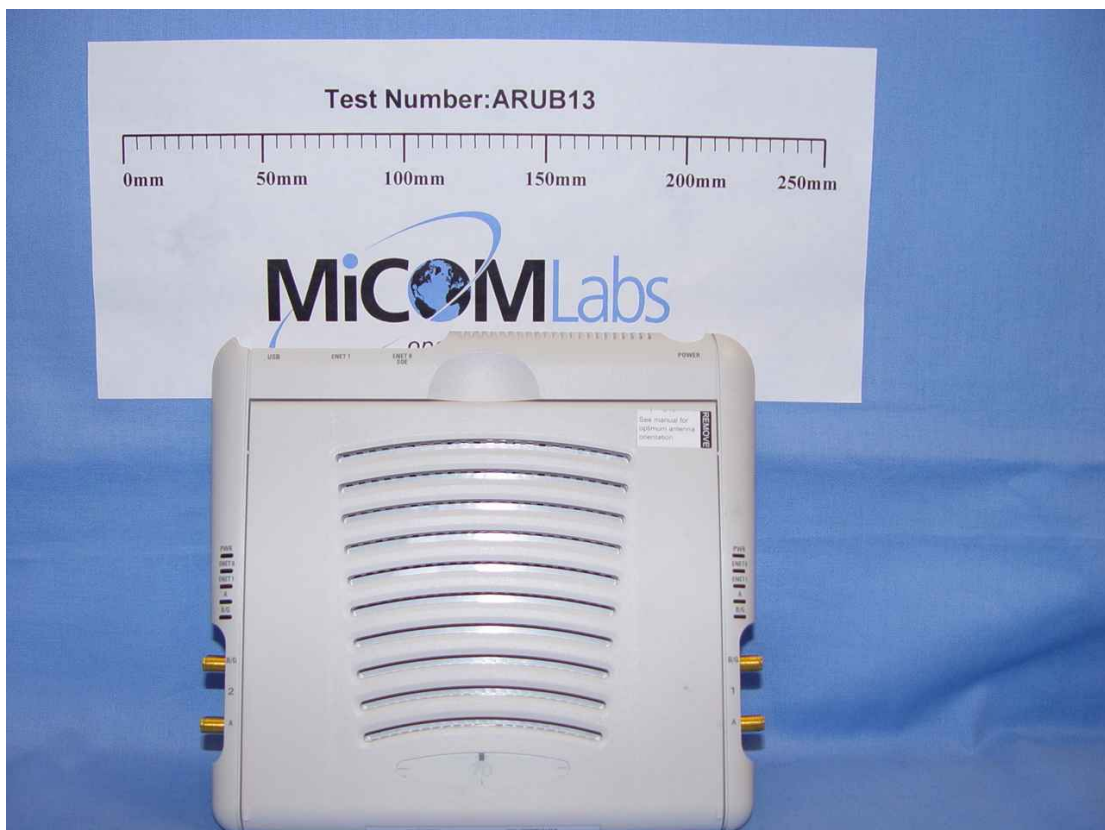

**Aruba Networks
AP-70 Wireless Access Point
Integral Antenna Position**



Position of Integral Antenna



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 13 of 133

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Access Point	Aruba Networks	AP-70	A50137415
EUT	Power Supply	CUI Inc	A1-15S05	R00042200045
EUT	Power Over LAN Hub	Power Dsine	6001	I041760400073 331B03
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

1. 2400-2500 MHz

- Integral 2.4 – 2.5 GHz Gain: 4.46 dBi
- Laird Technologies AP-ANT-2, 6 dBi OMNI (Laird Tech. P/N: CAF 96210)
- Cushcraft AP-ANT-7, 12 dBi Directional (Cushcraft P/N: S241290)

2. 5725-5850 MHz

- Integral 5.8 GHz Gain: 5.23 dBi
- Cushcraft AP-ANT-10, 6 dBi OMNI (Cushcraft P/N: S5153WBPX)
- Cushcraft AP-ANT-12, 14 dBi Directional (Cushcraft P/N: S51514WP)

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100 Ethernet
2. SOE 10/100 Ethernet
3. USB
4. 5 Vdc, 4mm supply connector

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 14 of 133

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. 802.11b 1 MB/s, 6 MB/s for 802.11g and 6 MB/s for 802.11a were found to provide the highest power levels. These data rates were used to exercise the product throughout the entire test program.

Matrix of Channel test configurations.

Operational Mode (802.11)	Frequencies (MHz)
b, g	2,412
	2,437
	2,462
a	5,745
	5,785
	5,825

Matrix of Access Point Data Rate Configurations

'b' Mode Data Rate	'a' and 'g' Mode Data Rate
1 Mb/s	6 Mb/s

Antenna Test Configurations for Radiated Emissions

Freq Band (GHz)	802.11 Mode	Integral	ANT-2 6 dBi Omni	ANT-7 12 dBi Panel	ANT-10 6 dBi Omni	ANT-12 14 dBi Panel
2.4	b	X	X	X		
	g	X	X	X		
5.8	a	X			X	X

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 15 of 133

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

2. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 16 of 133

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2)	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1
15.247(b)(3) 15.31(e)	Peak Output Power Voltage Variation	Shall not exceed 1W Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.2
15.247(e)	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.3
15.247(i)	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Conducted	Complies	5.1.4
15.247(d) 15.205 / 15.209	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 17 of 133

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.6
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.1
	Radiated Band Edge	Band edge results		Complies	5.1.6.2
15.205 / 15.209	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.6.3
15.207	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.7

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Appendix A - Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics


5.1.1. 6 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.247(a)(2)

Test Procedure

The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

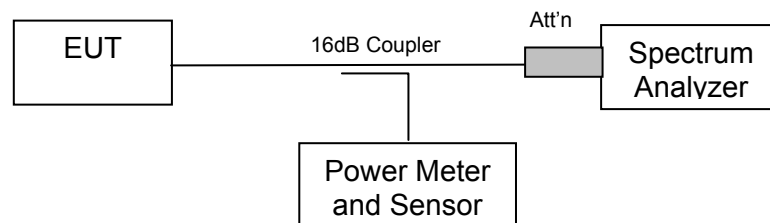

Measurement set up for 6 dB and 99 % bandwidth test

Measurement Results for 6 dB & 99% Bandwidth

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 19 of 133

Measurement Results for 6 dB and 99 % Operational Bandwidth(s)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11b - 1 Mb/s

Center Frequency (MHz)	6 dB Bandwidth (MHz)	99 % BW (MHz)
2,412	11.222	15.531
2,437	11.974	15.531
2,462	12.525	15.531

2,412 MHz 802.11b 6 dB Bandwidth

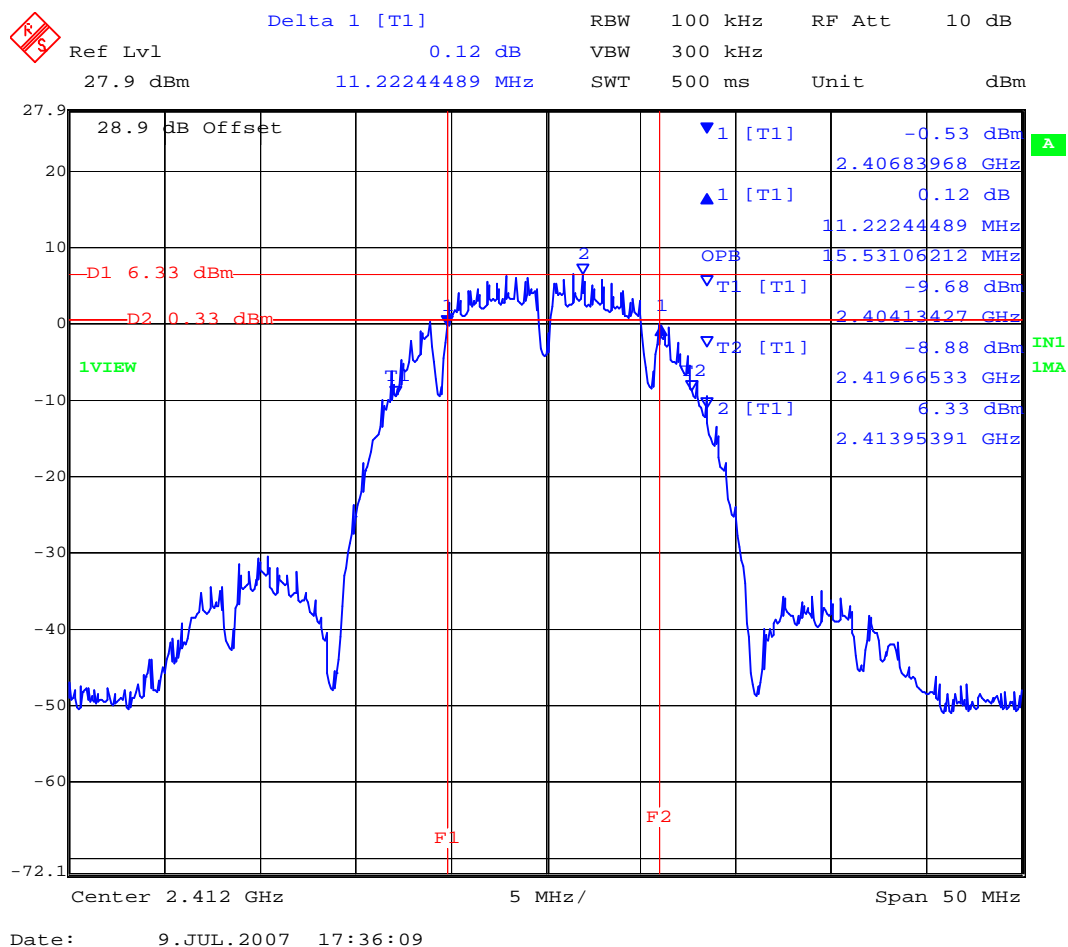


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 20 of 133

2,437 MHz 802.11b 6 dB Bandwidth

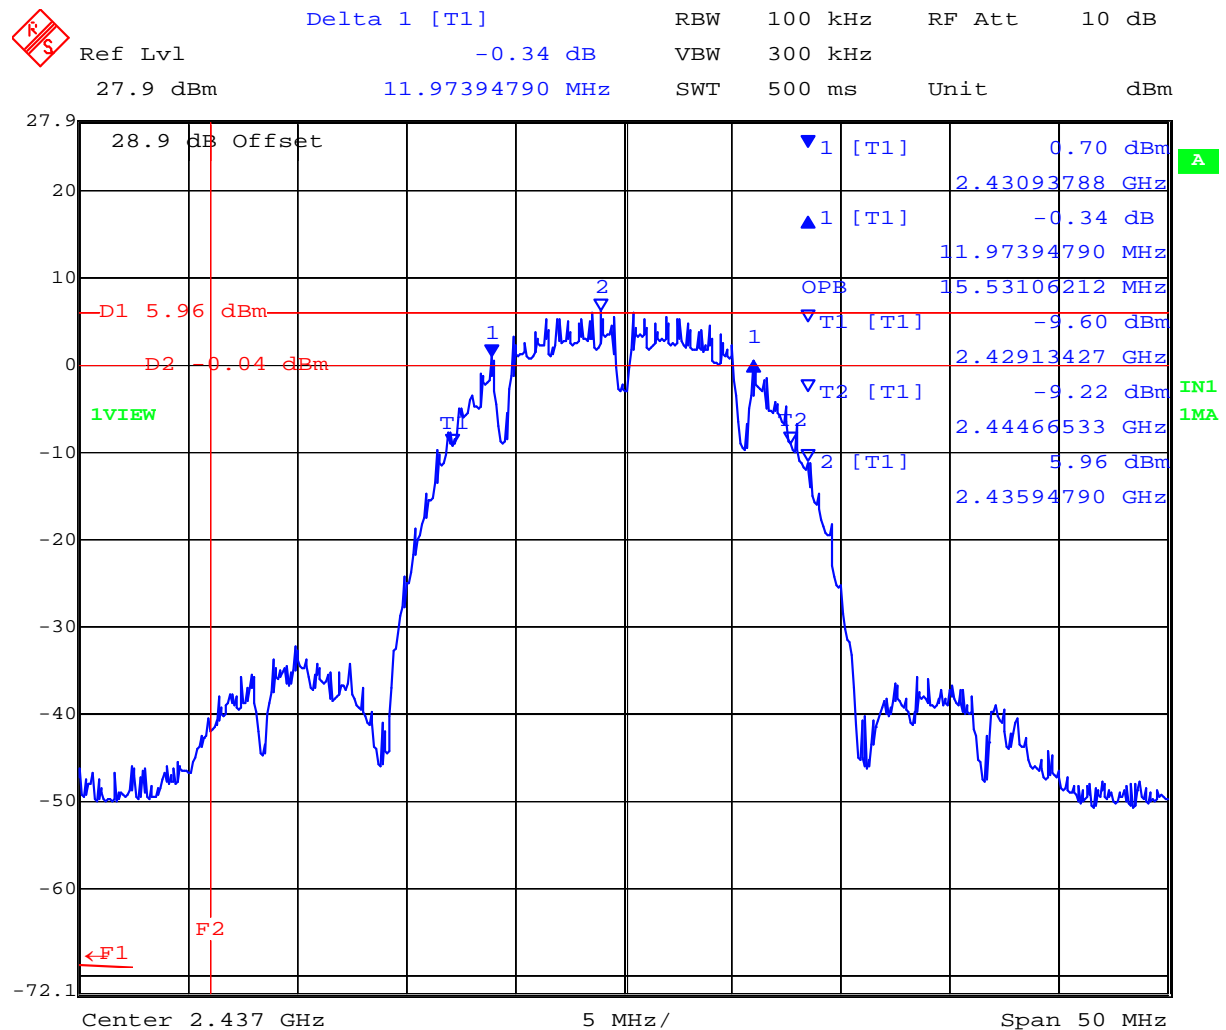


Date: 9.JUL.2007 17:40:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 21 of 133

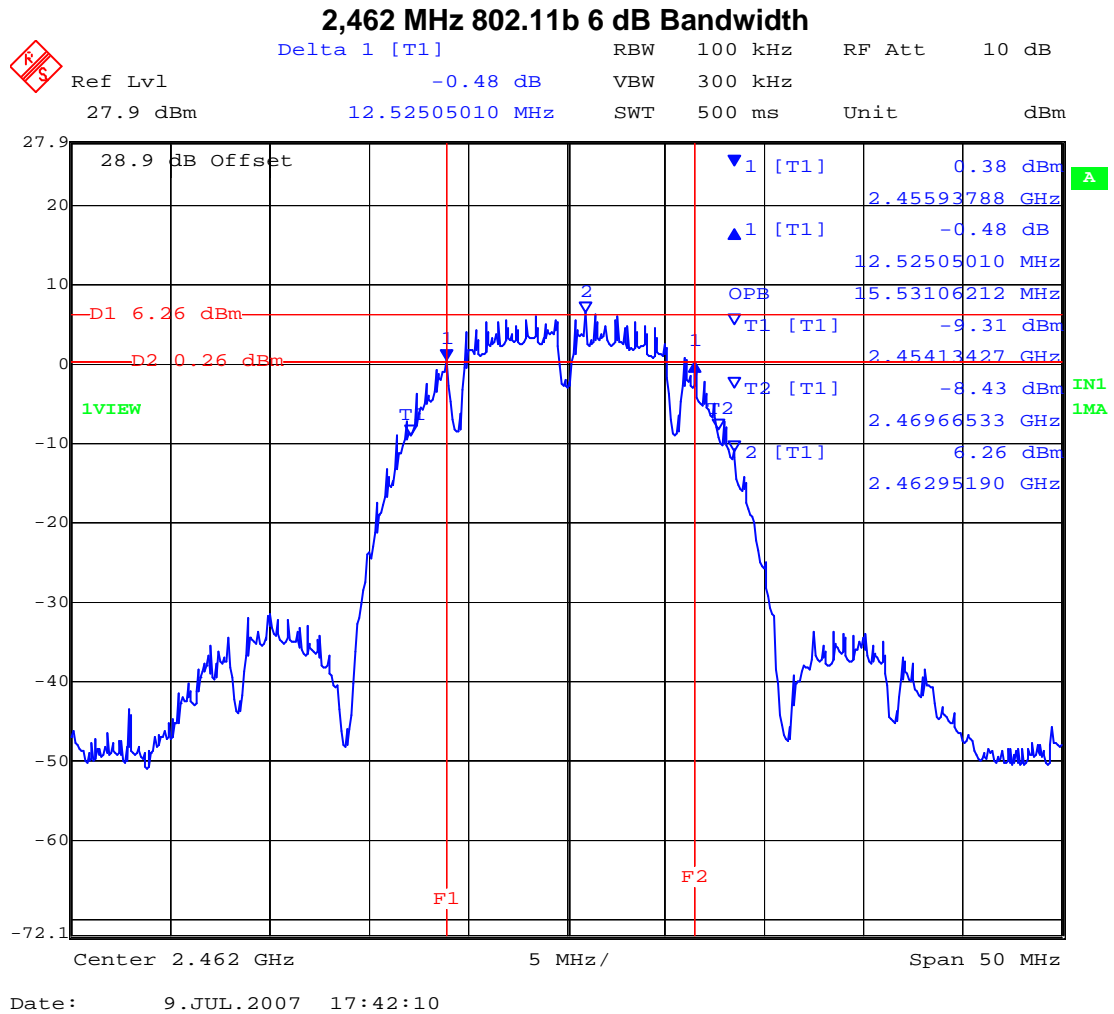

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 22 of 133

TABLE OF RESULTS – 802.11g - 6 Mb/s

Center Frequency (MHz)	6 dB Bandwidth (MHz)	99 % BW (MHz)
2,412	16.433	16.533
2,437	16.383	16.733
2,462	16.433	16.633


2,412 MHz 802.11g 6 dB Bandwidth

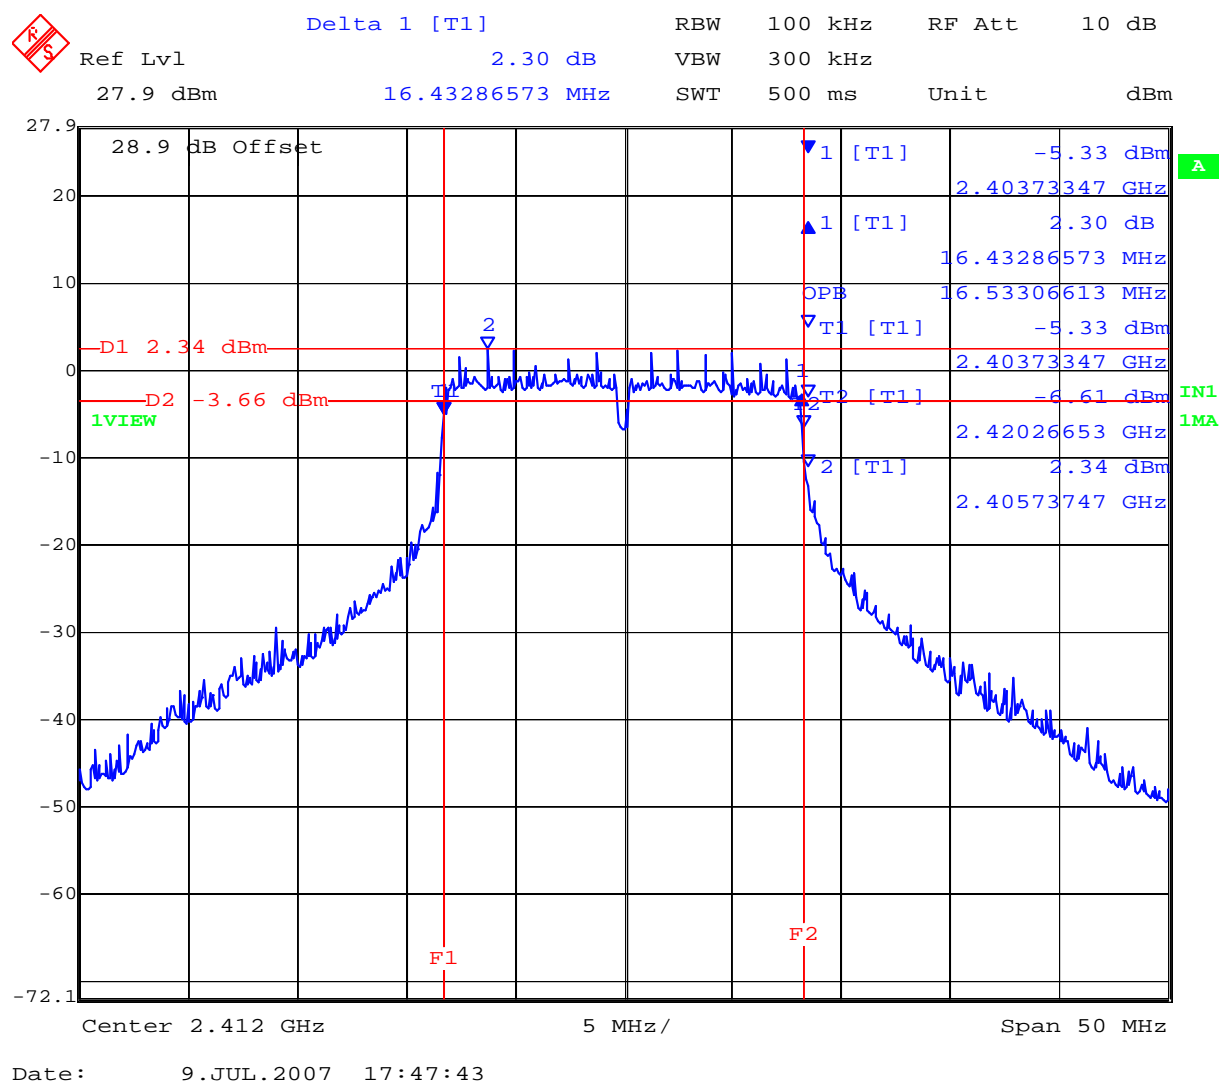

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 23 of 133

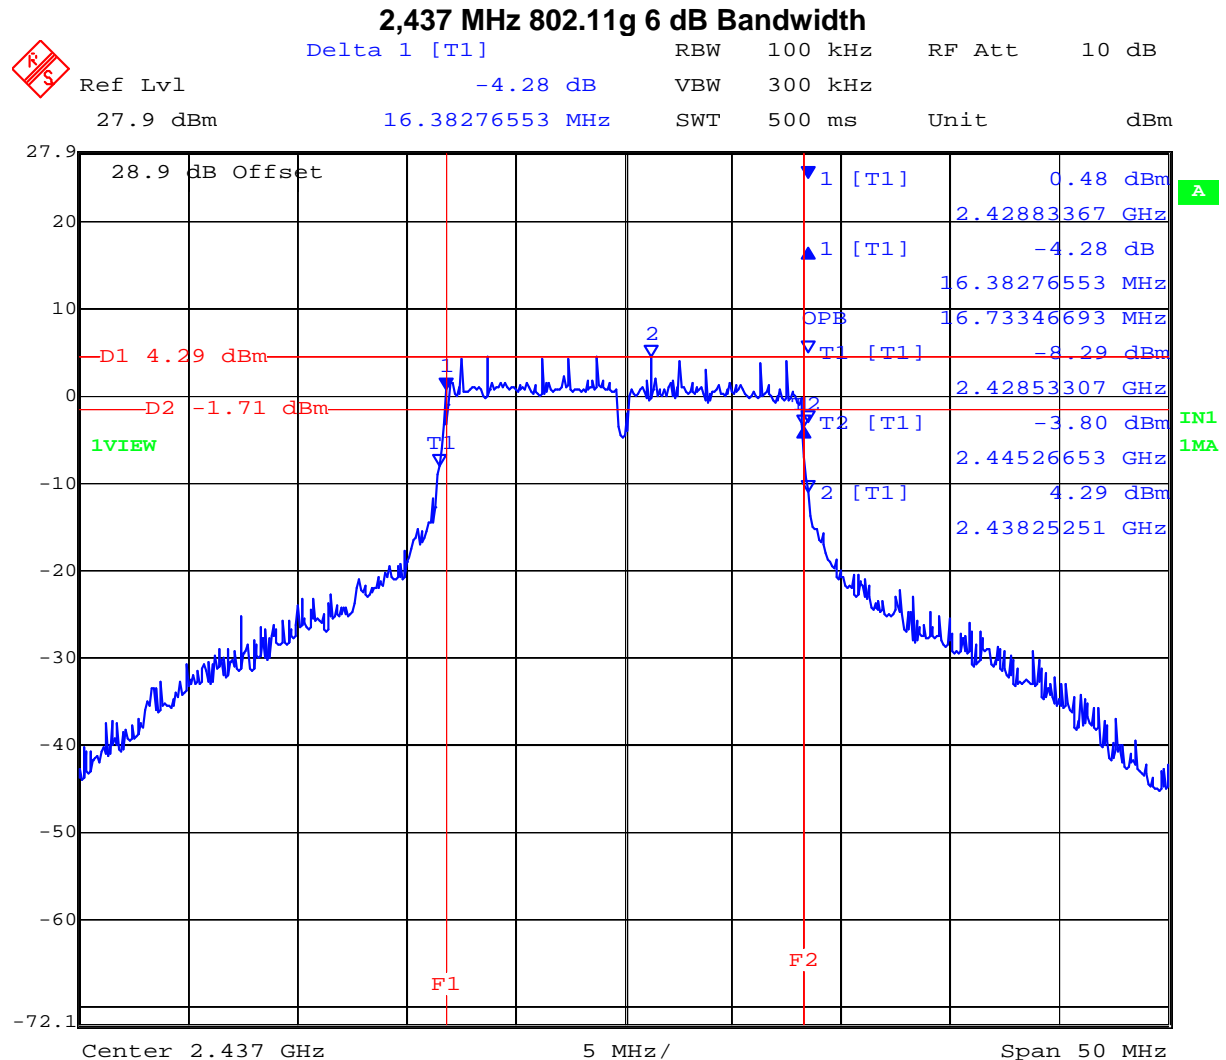


Date: 9.JUL.2007 17:49:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 24 of 133

2,462 MHz 802.11g 6 dB Bandwidth

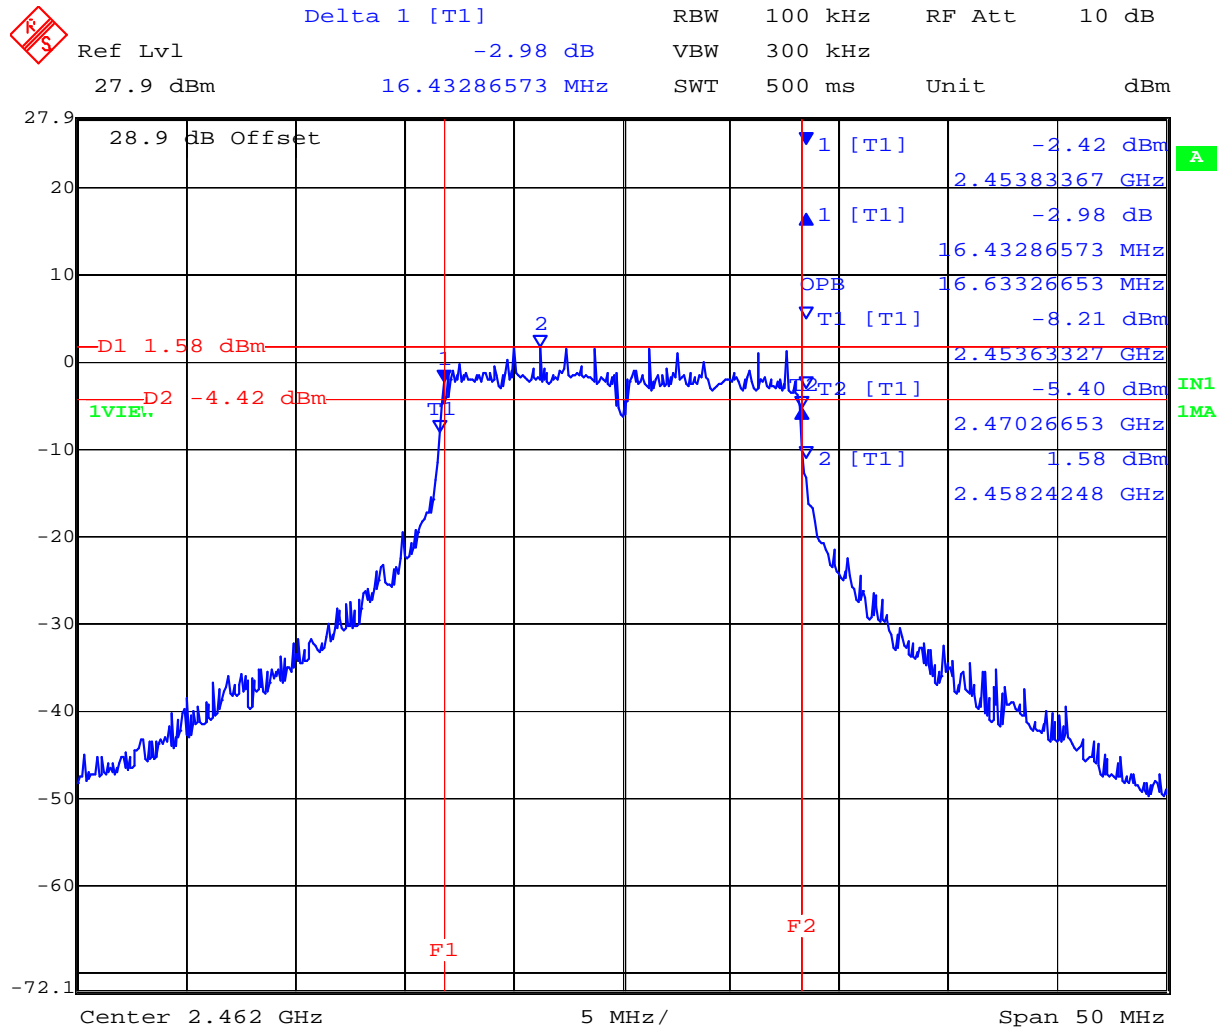

Date: 9.JUL.2007 17:53:13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 25 of 133

TABLE OF RESULTS – 802.11a - 6 Mb/s

Center Frequency (MHz)	6 dB Bandwidth (MHz)	99 % BW (MHz)
5,745	16.232	16.934
5,785	16.333	17.034
5,825	16.333	16.934

5,745 MHz 802.11a 6 dB Bandwidth

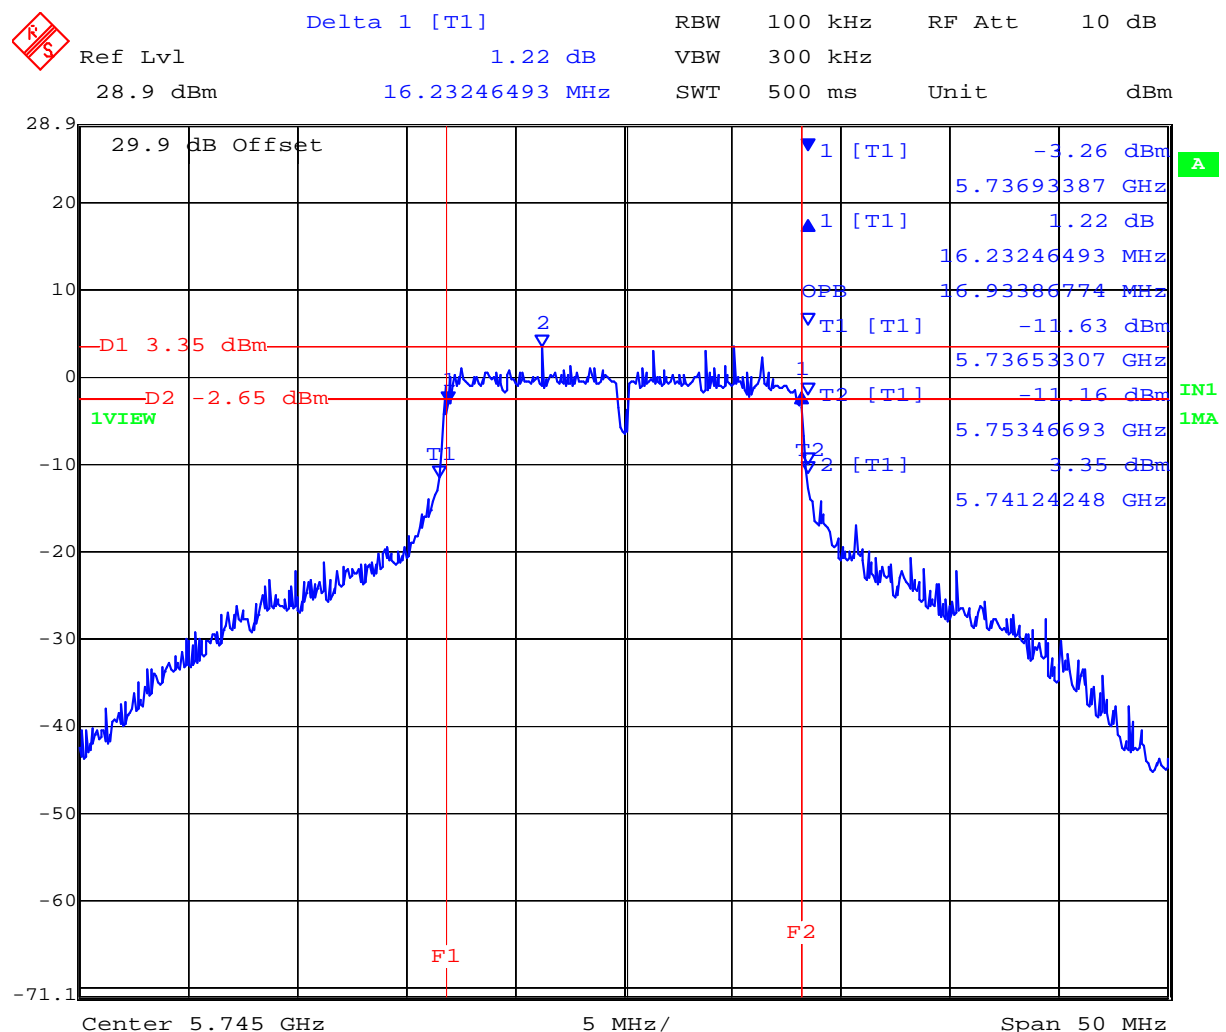


Date: 10.JUL.2007 14:36:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 26 of 133

5,785 MHz 802.11a 6 dB Bandwidth

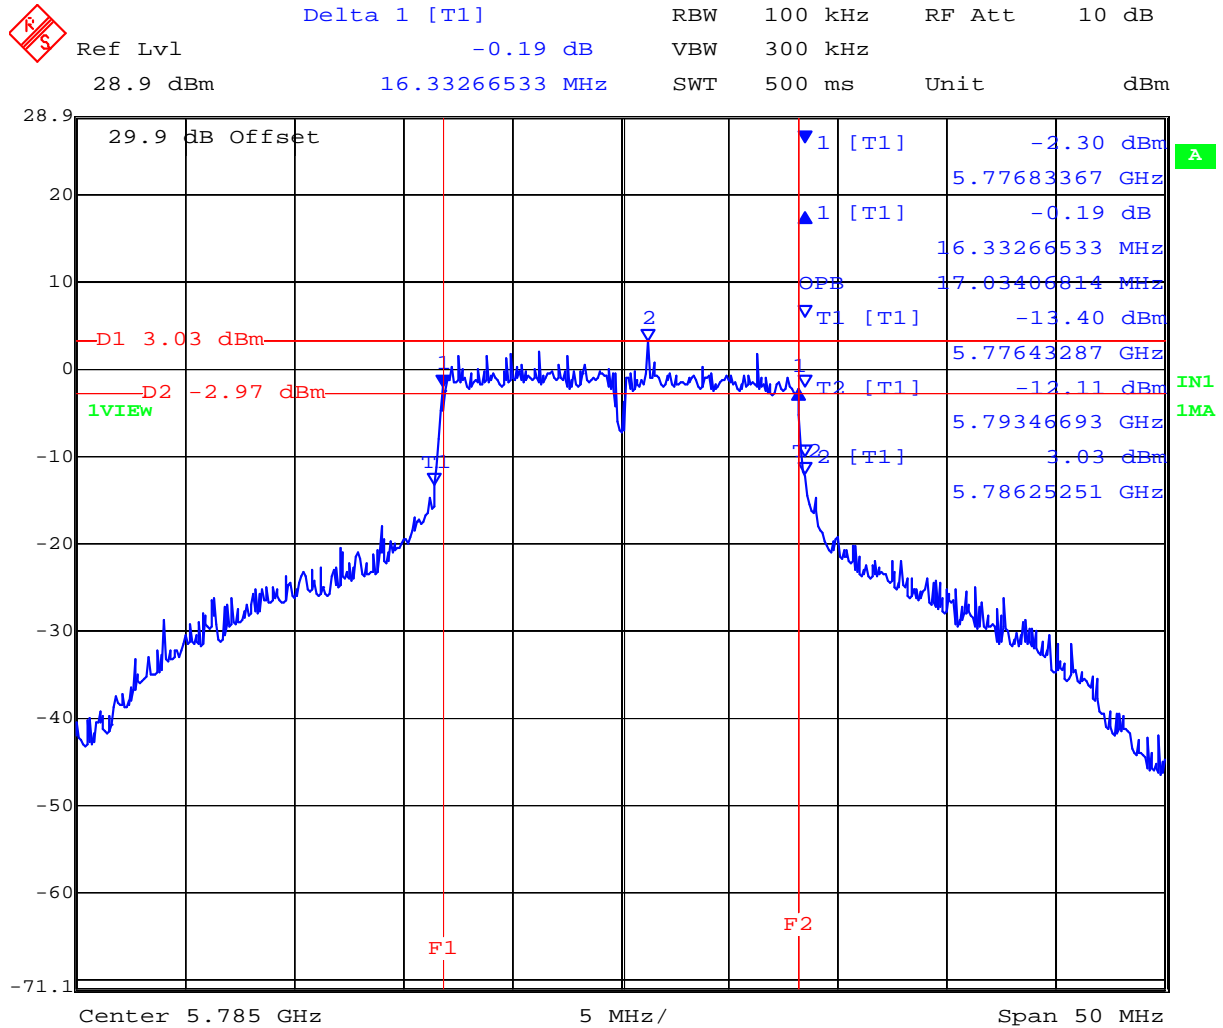


Date: 10.JUL.2007 14:39:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 27 of 133

5,825 MHz 802.11a 6 dB Bandwidth

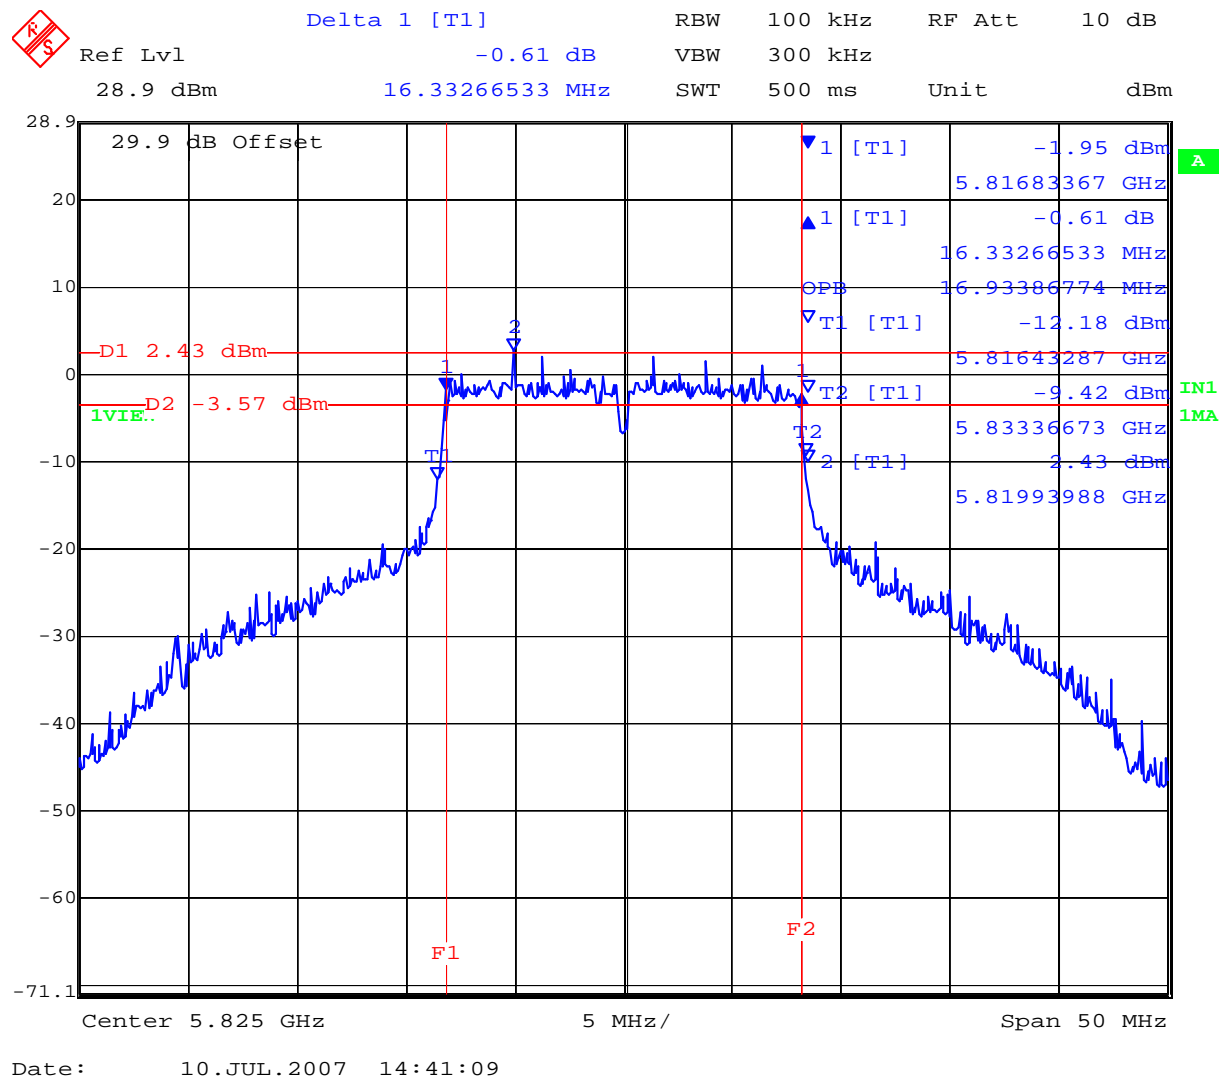

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 28 of 133

Specification

Limits

§15.247 (a)(2) & RSS-210 §A8.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

§ IC RSS-Gen 4.4.1 Occupied Bandwidth When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

§ IC RSS-Gen 4.4.2 6 dB Bandwidth Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in –band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.2. Peak Output Power

FCC, Part 15 Subpart C §15.247(b)(3), §15.31(e)

Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to measure peak power over the 99 % bandwidth.

Test Measurement Set up

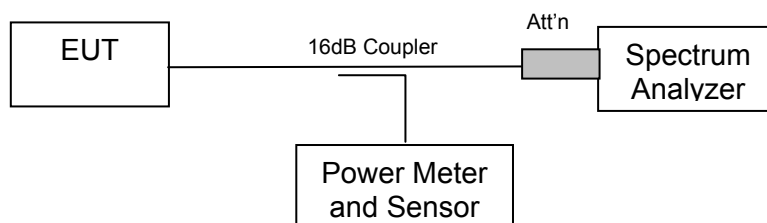

Measurement set up for Transmitter Peak Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

b/g (2.4 GHz) Maximum Antenna Gain = +12 dBi

a (5 GHz) Maximum Antenna Gain = +14 dBi

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Type	Gain (dBi)	Antenna Gain >6dBi (dB)	Max. Allowable Peak Power (dBm)	Maximum EIRP (dBm)
2.4GHz ANT-7	12	6	24	36
5 GHz ANT-12	14	8	22	36




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 30 of 133

TABLE OF RESULTS – 802.11b – 1Mb/s Maximum Antenna Gain = +12 dBi

Center Frequency (MHz)	99% Measurement Bandwidth (MHz)	Peak Power (dBm)	EIRP (dBm)
2,412	15.531	+18.63	30.63
2,437	15.531	+18.48	30.48
2,462	15.531	+18.75	30.75

2,412 MHz 802.11b Peak Power (dBm)

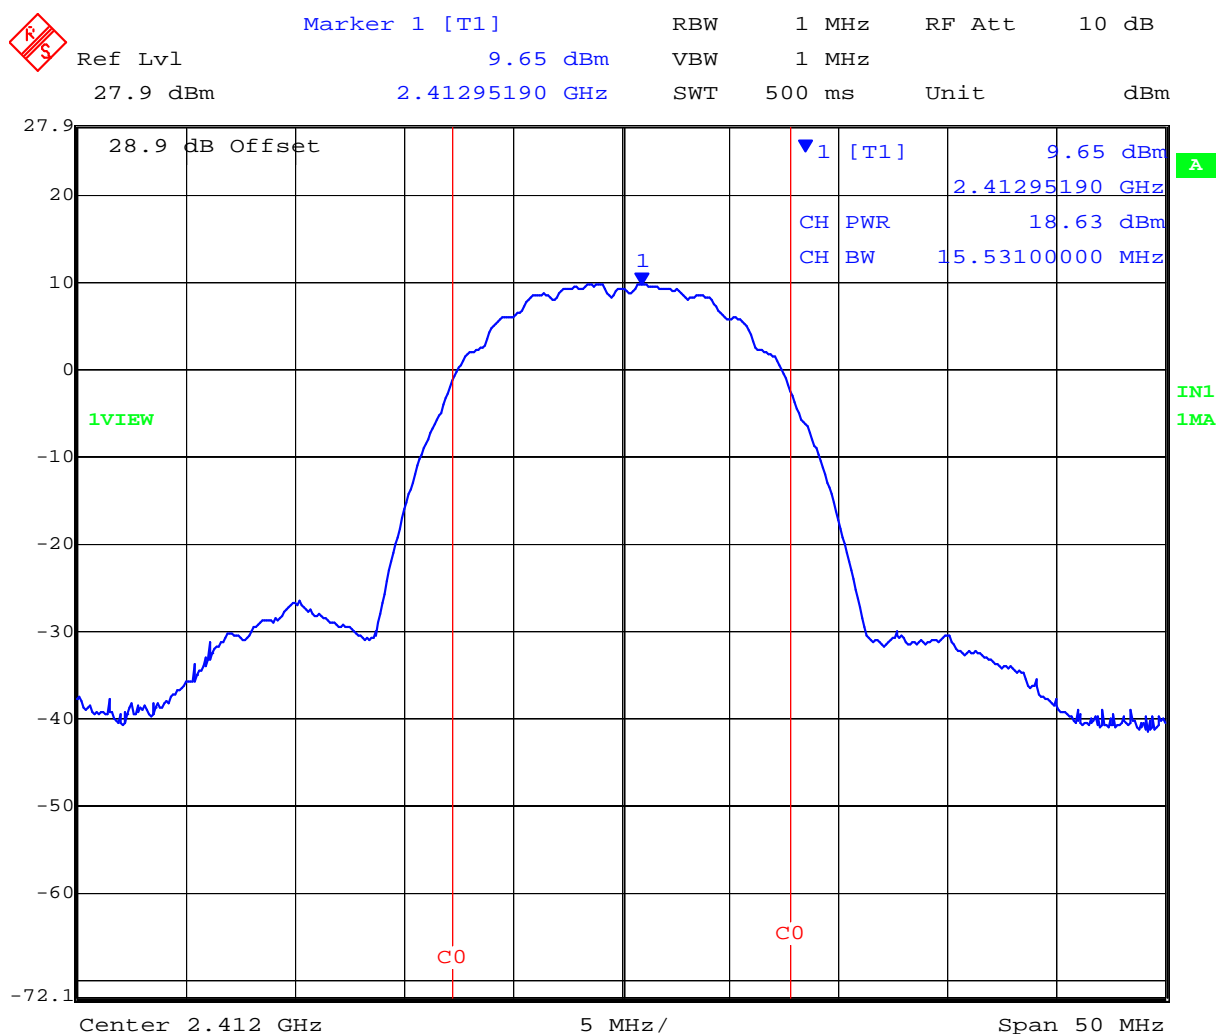


Date: 9.JUL.2007 18:09:53

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 31 of 133

2,437 MHz 802.11b Peak Power (dBm)

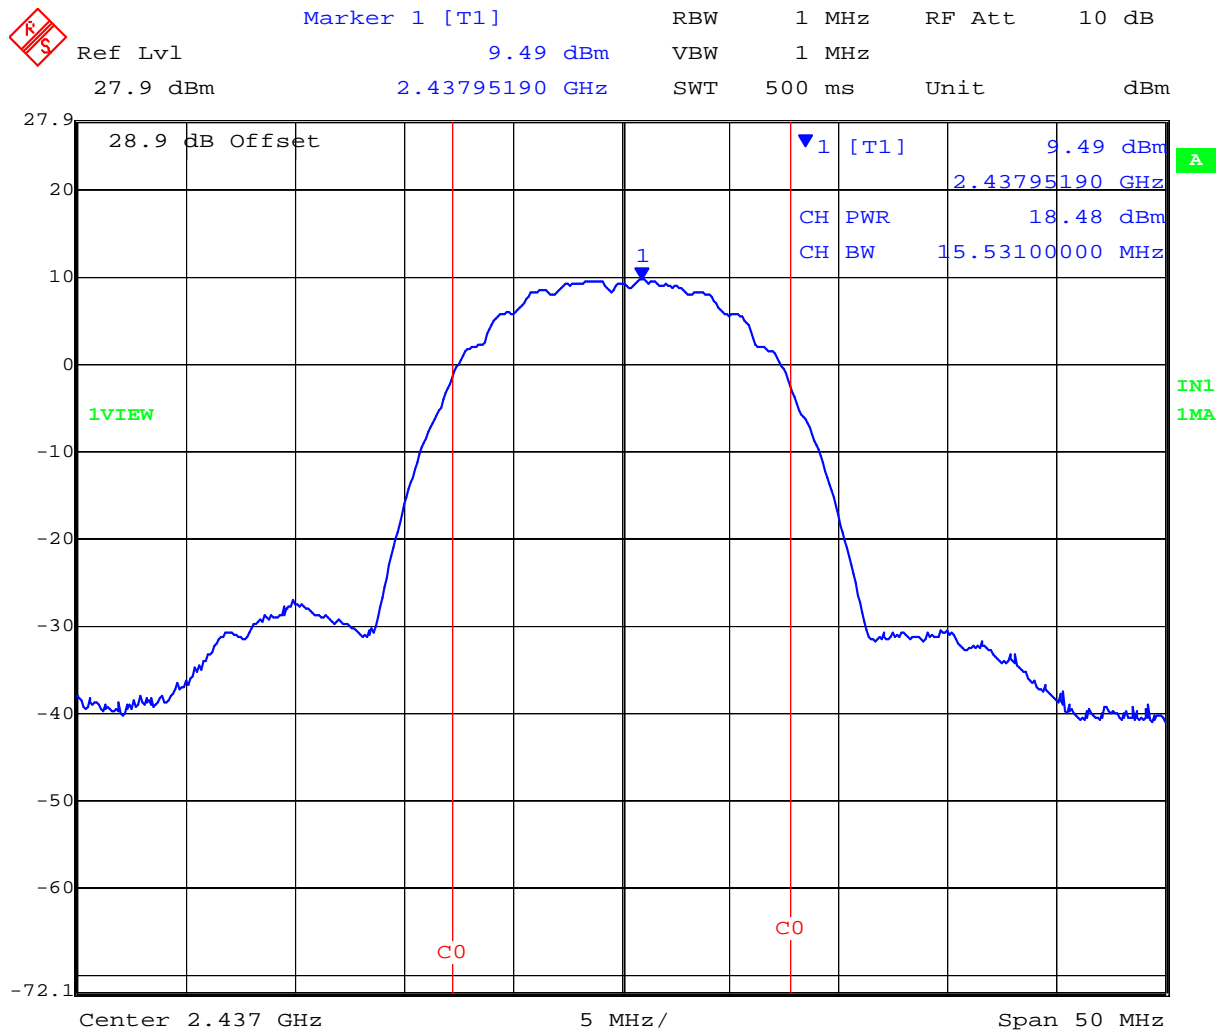


Date: 9.JUL.2007 18:10:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 32 of 133

2,462 MHz 802.11b Peak Power (dBm)

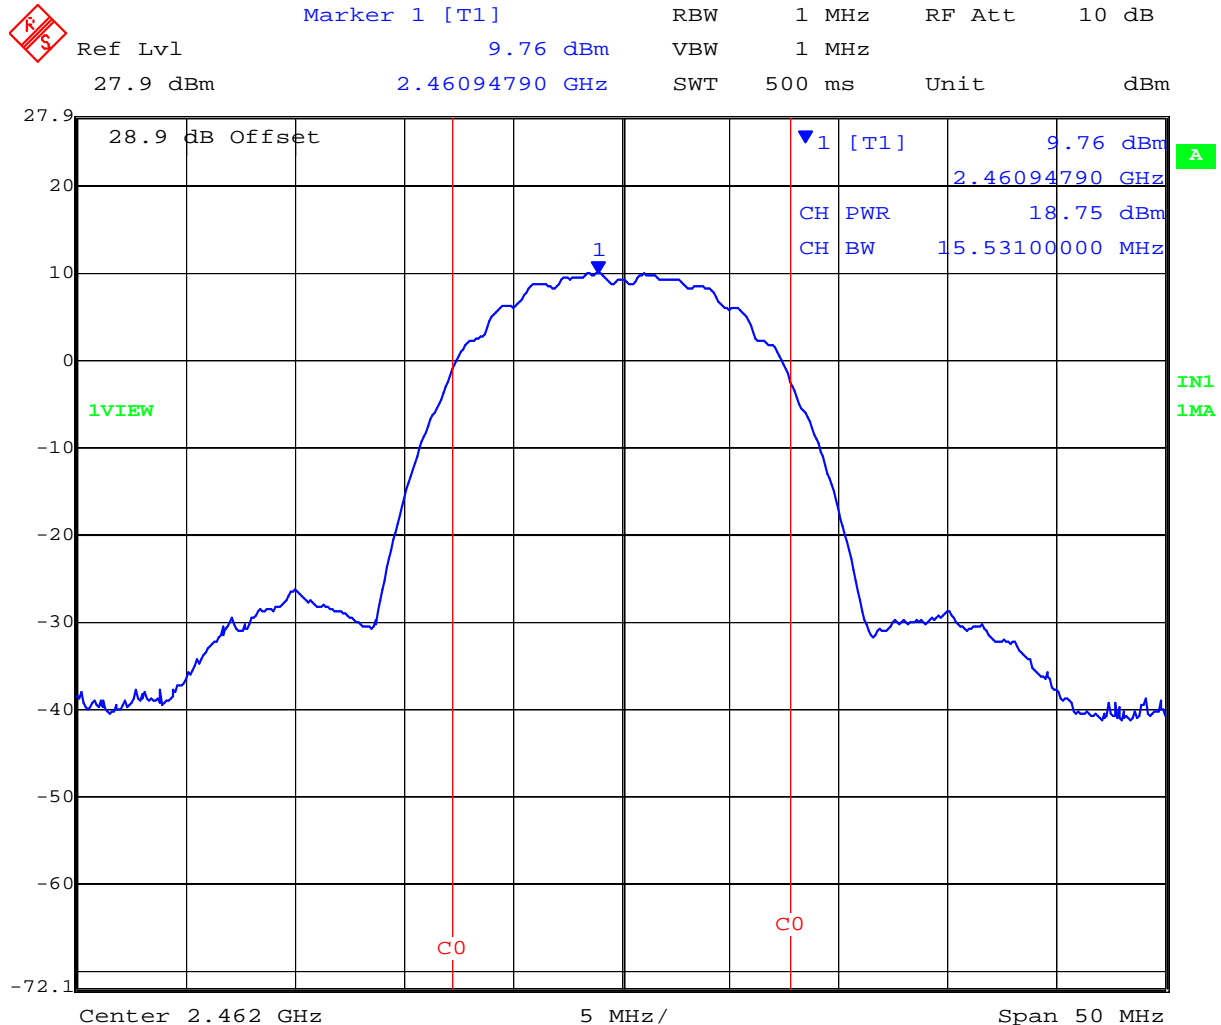

Date: 9.JUL.2007 18:11:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 33 of 133

TABLE OF RESULTS – 802.11g – 6Mb/s Maximum Antenna Gain = +12 dBi

Center Frequency (MHz)	99% Measurement Bandwidth (MHz)	Peak Power (dBm)	EIRP (dBm)
2,412	16.533	+20.58	32.58
2,437	16.733	+22.95	34.95
2,462	16.633	+20.87	32.87

2,412 MHz 802.11g Peak Power (dBm)

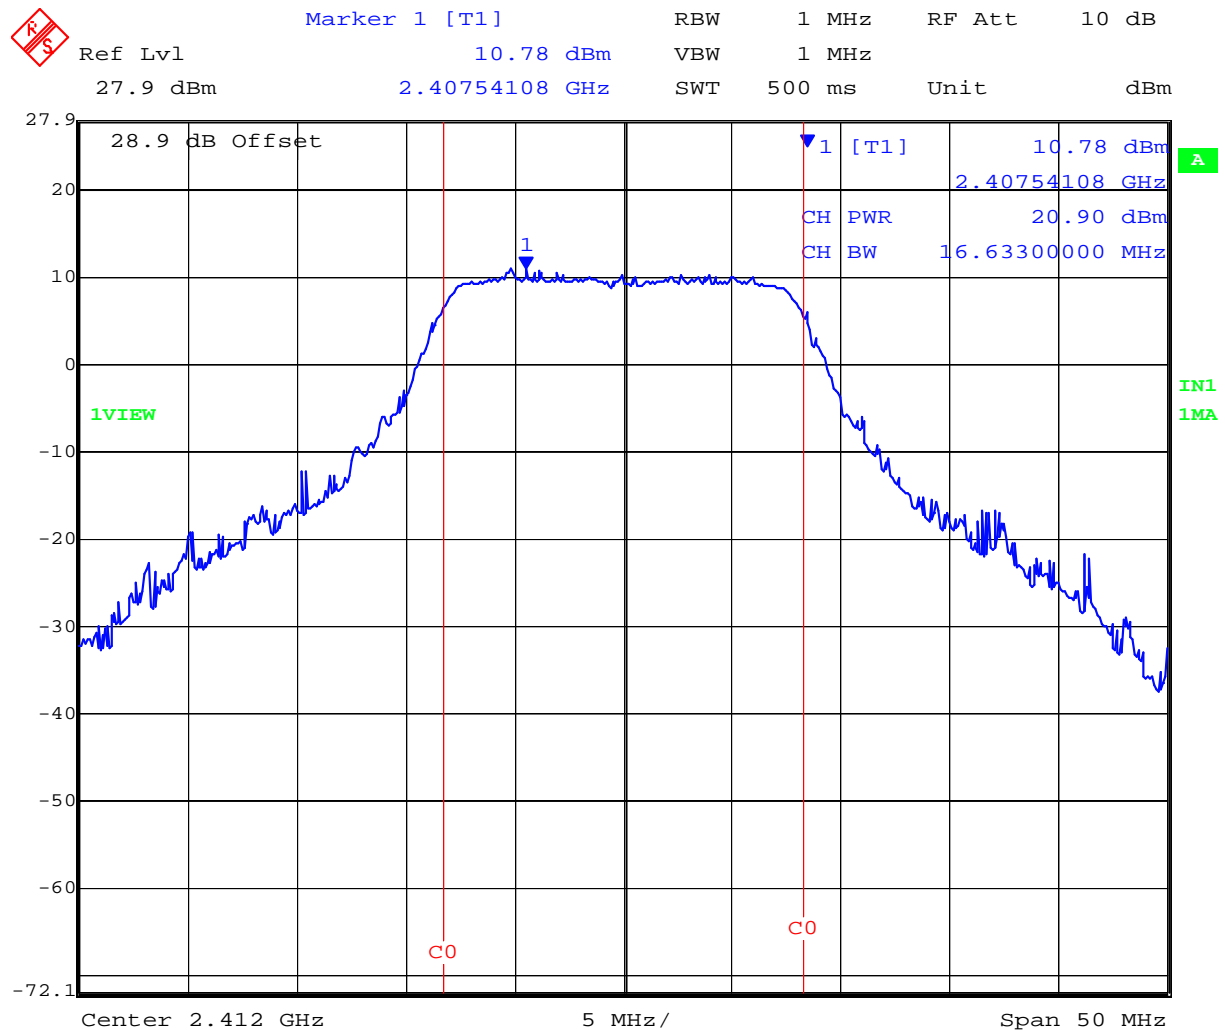


Date: 9.JUL.2007 18:08:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 34 of 133

2,437 MHz 802.11g Peak Power (dBm)

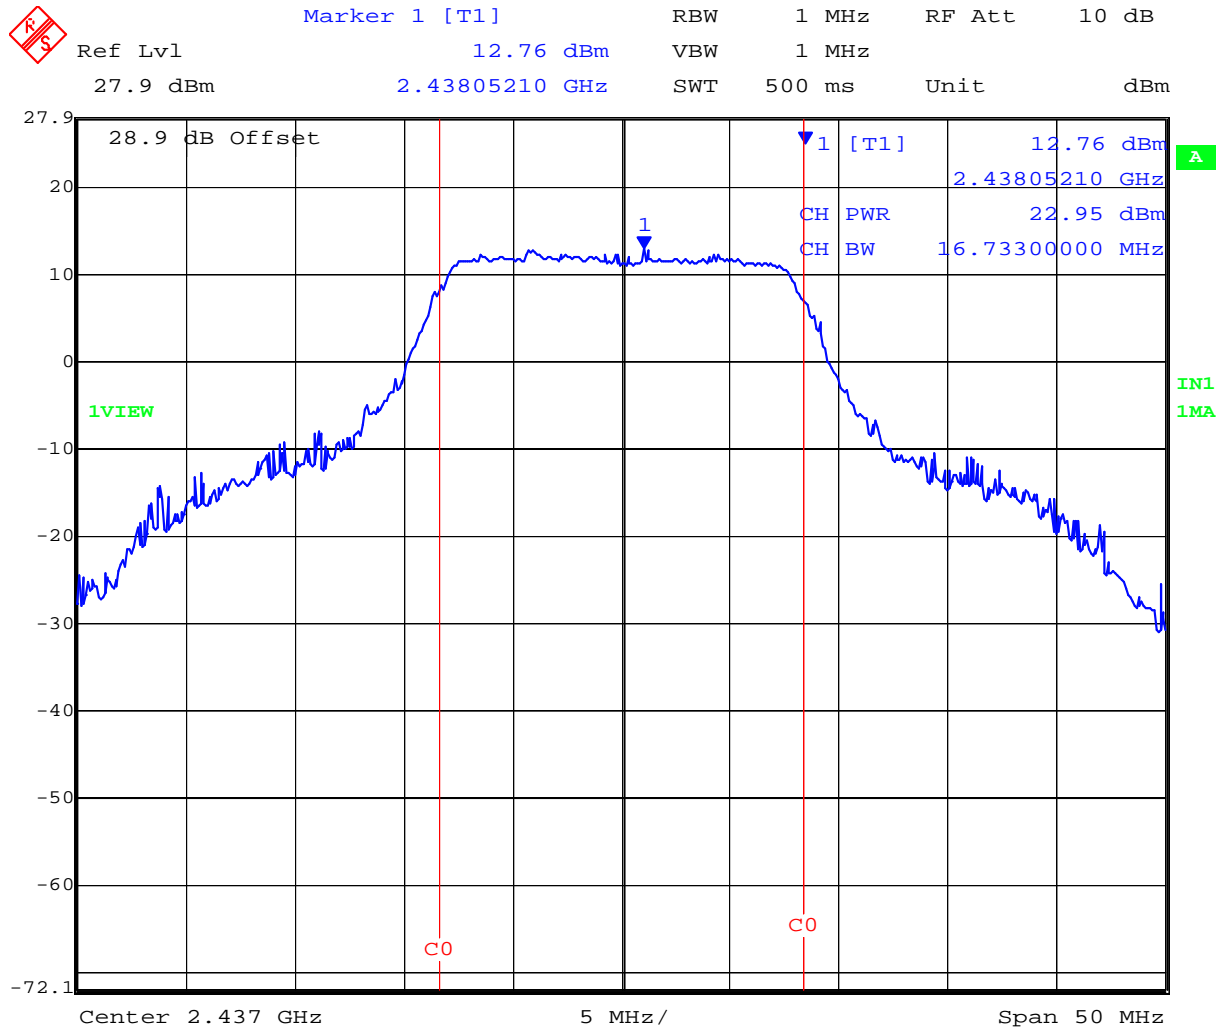


Date: 9.JUL.2007 18:02:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 35 of 133

2,462 MHz 802.11g Peak Power (dBm)

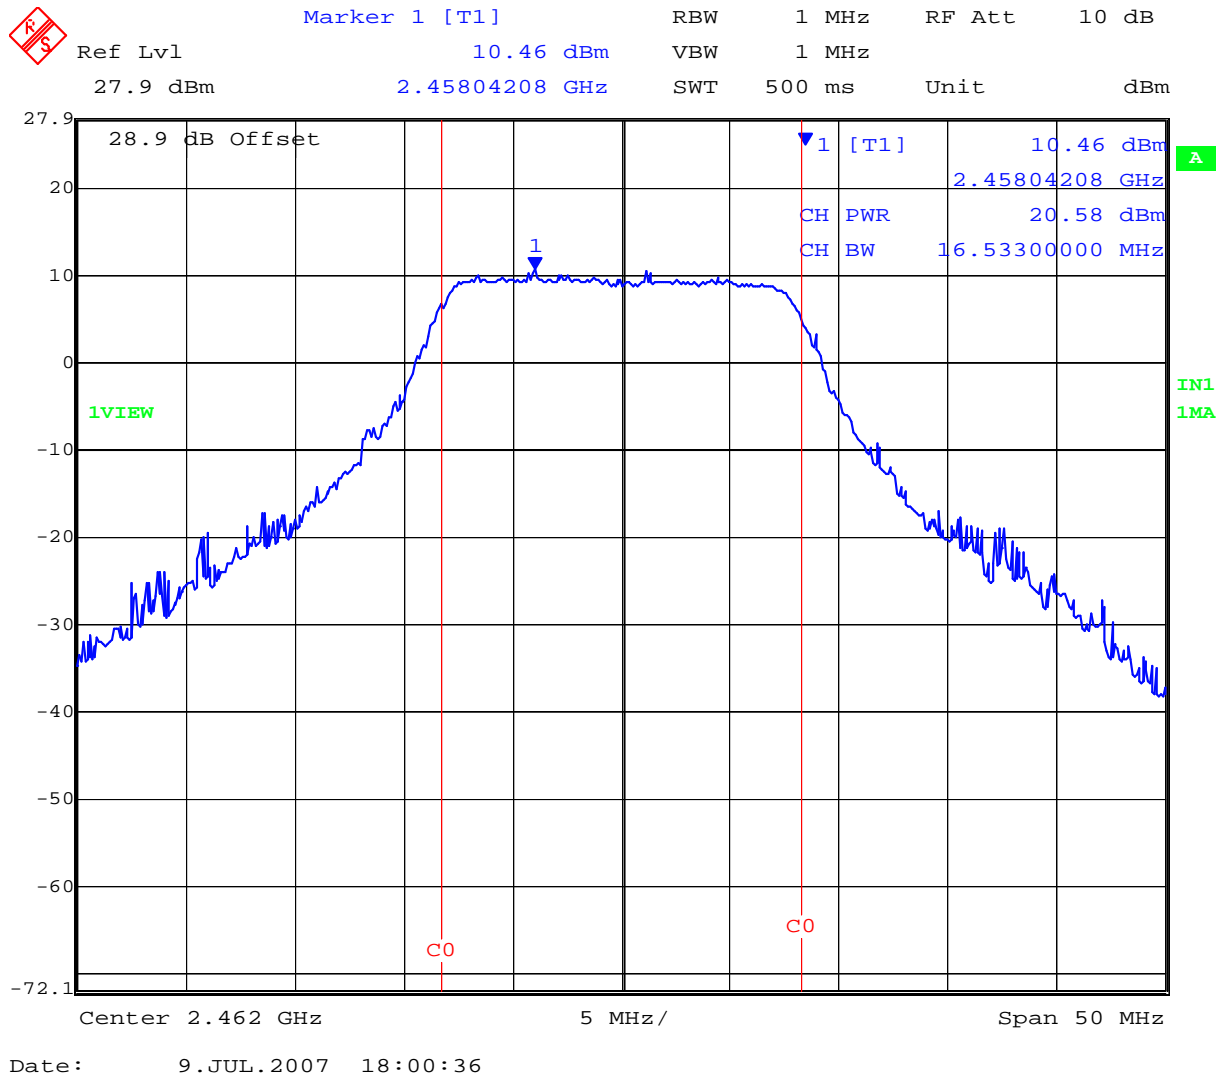

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 36 of 133

TABLE OF RESULTS – 802.11a – 6 Mb/s Maximum Antenna Gain = +14 dBi

Center Frequency (MHz)	99% Measurement Bandwidth (MHz)	Peak Power (dBm)	EIRP (dBm)
5,745	16.934	+22.00	36.00
5,785	17.034	+21.56	35.56
5,825	16.934	+21.06	35.06

5,745 MHz 802.11a Peak Power (dBm)

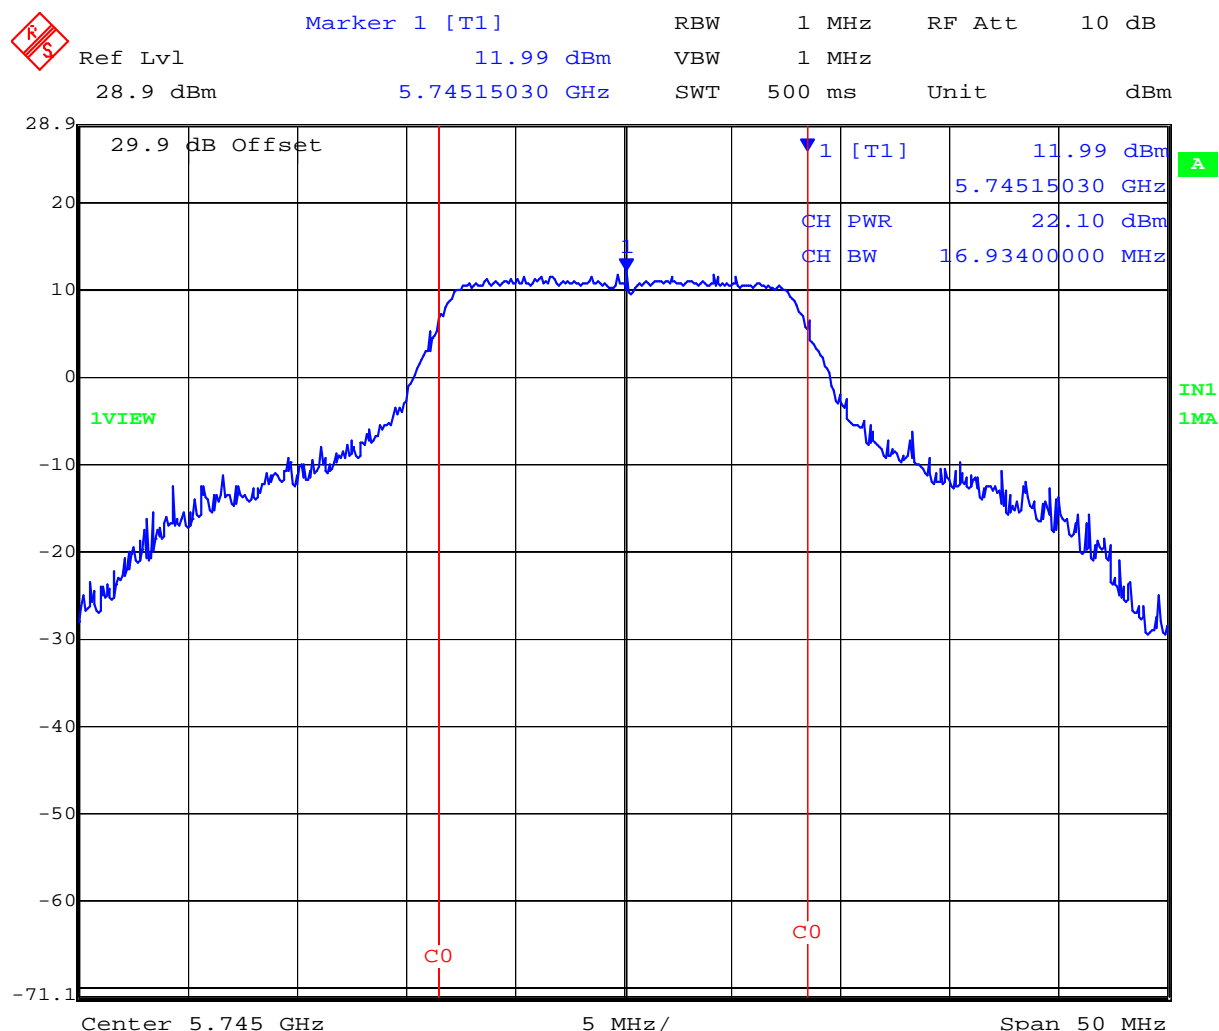


Date: 10.JUL.2007 14:46:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 37 of 133

5,785 MHz 802.11a Peak Power (dBm)

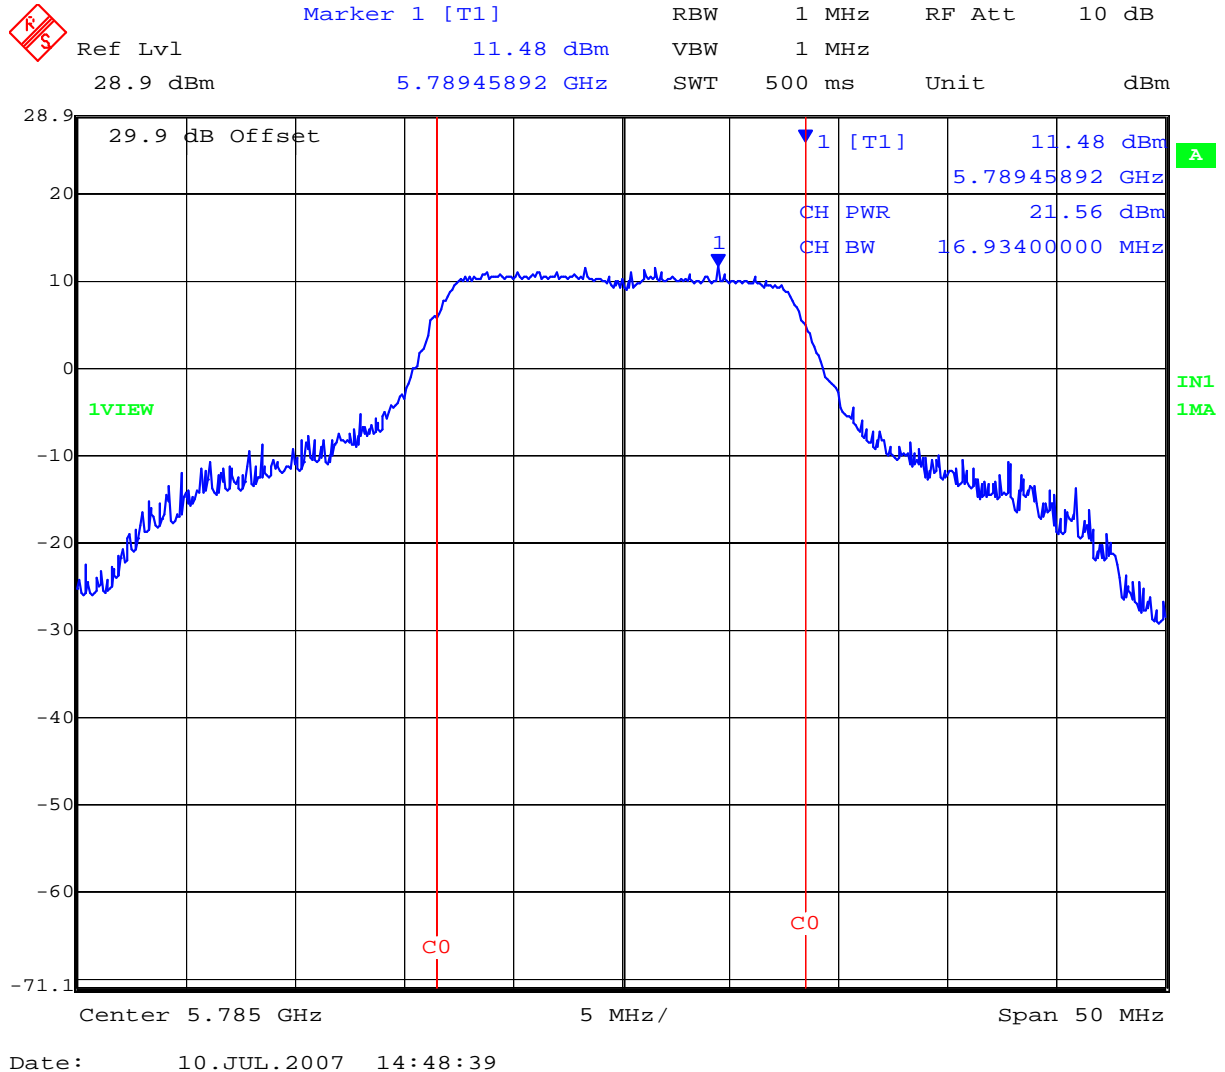


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 38 of 133

5,825 MHz 802.11a Peak Power (dBm)

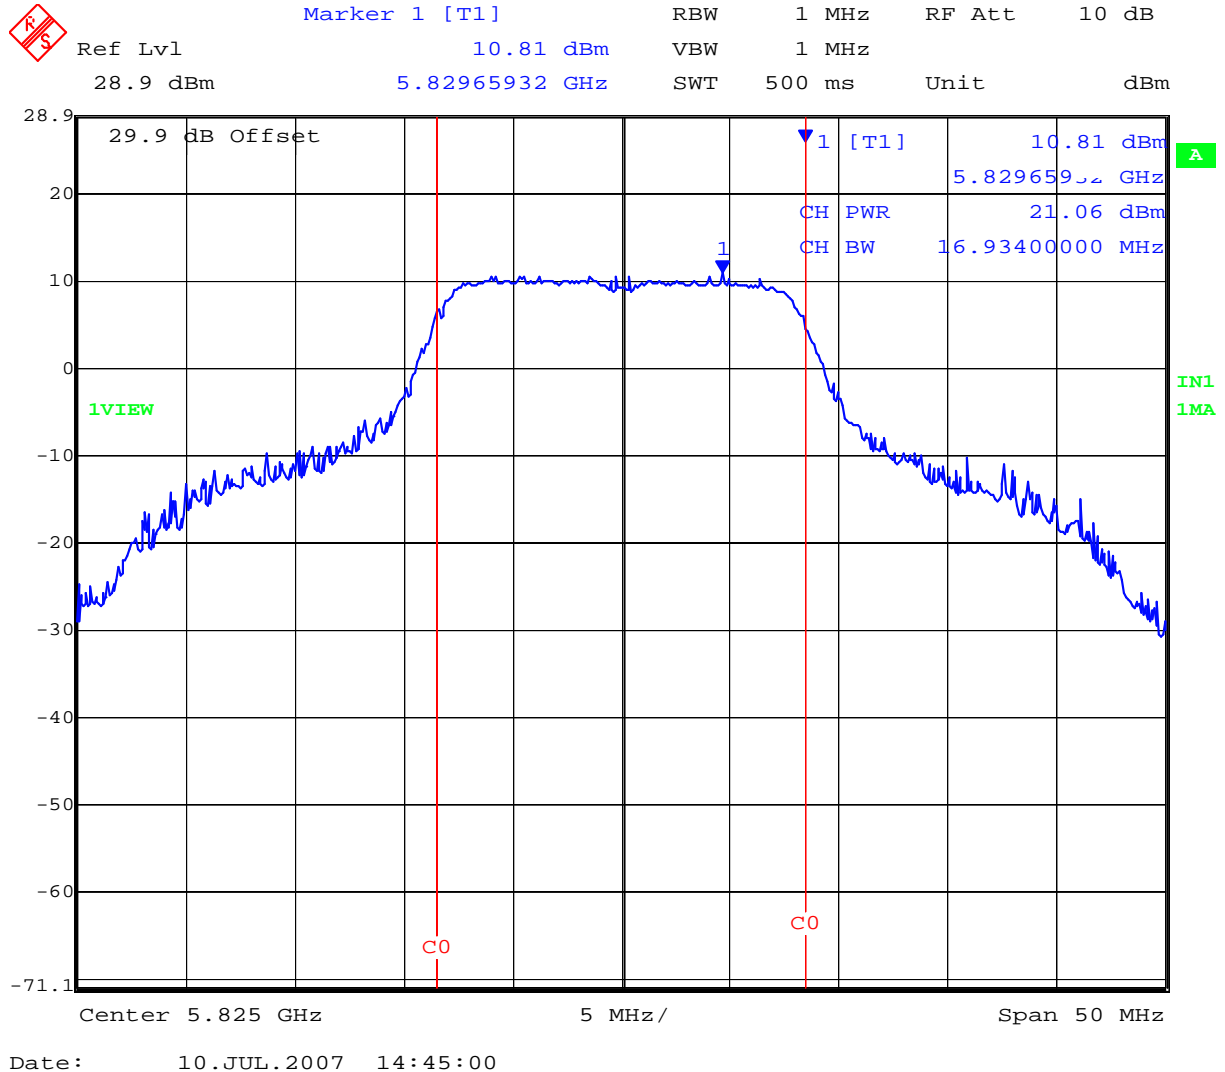

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 39 of 133

Specification

Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.31 (e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

§ RSS-210 A8.4(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.247(e)

Test Procedure

The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time \geq span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.

Test Measurement Set up

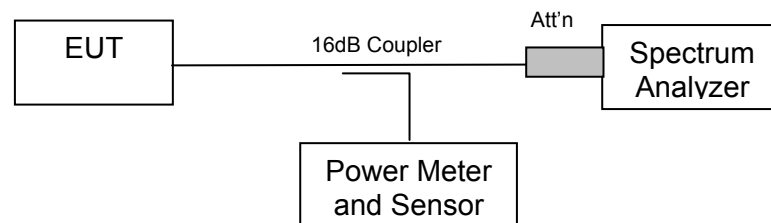

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 41 of 133

TABLE OF RESULTS – 802.11b – 1Mb/s

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dBm)
2,412	2412.78056	-5.42	+8	-13.42
2,437	2437.78056	-5.88	+8	-13.88
2,462	2461.22144	-5.13	+8	-13.13

2,412 MHz 802.11b Peak Power Spectral Density

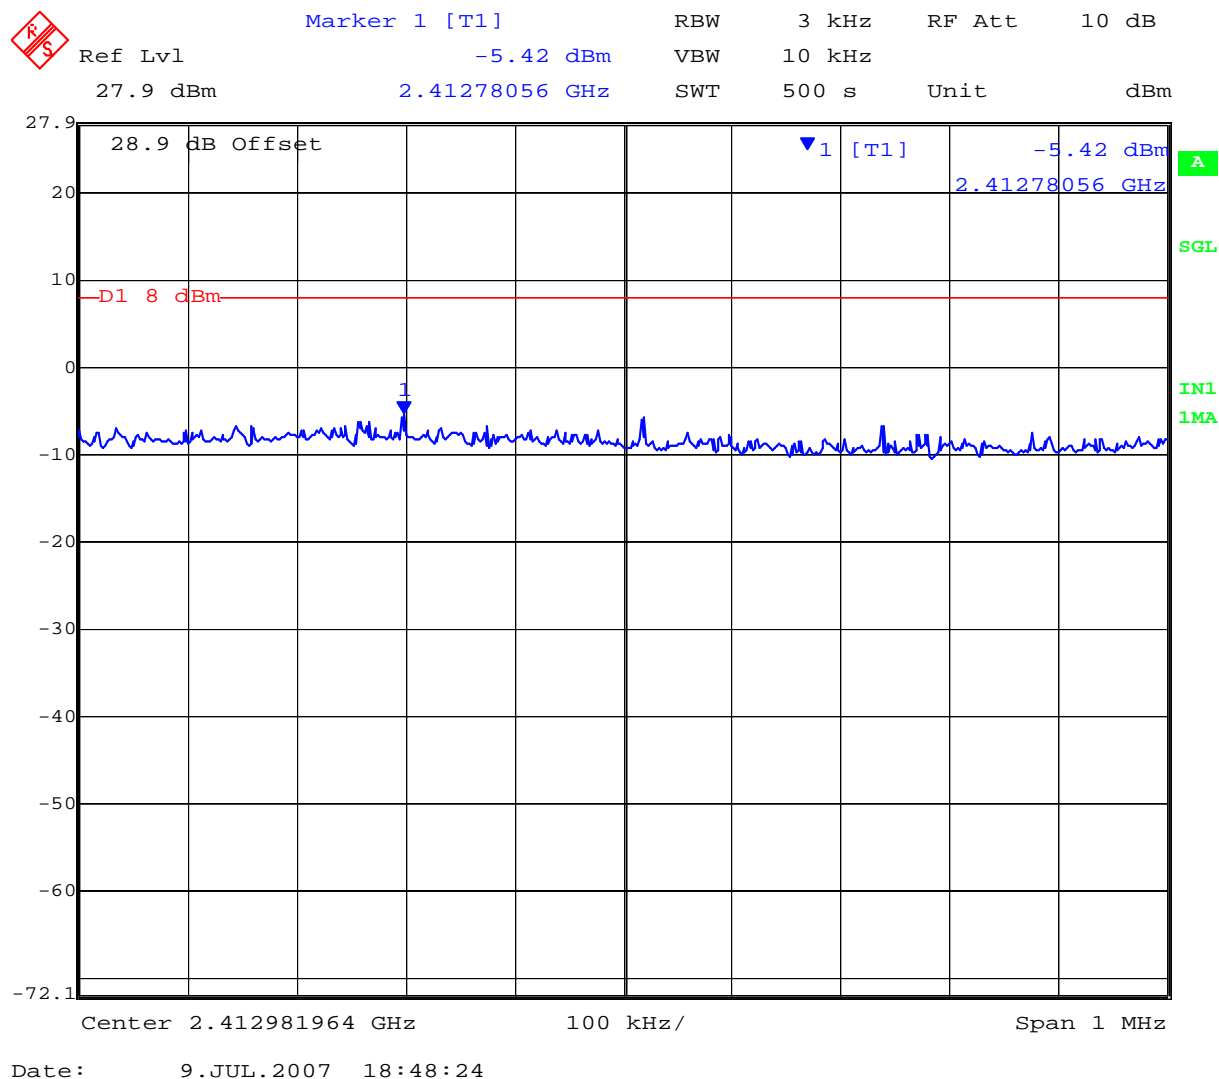


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 42 of 133

2,437 MHz 802.11b Peak Power Spectral Density

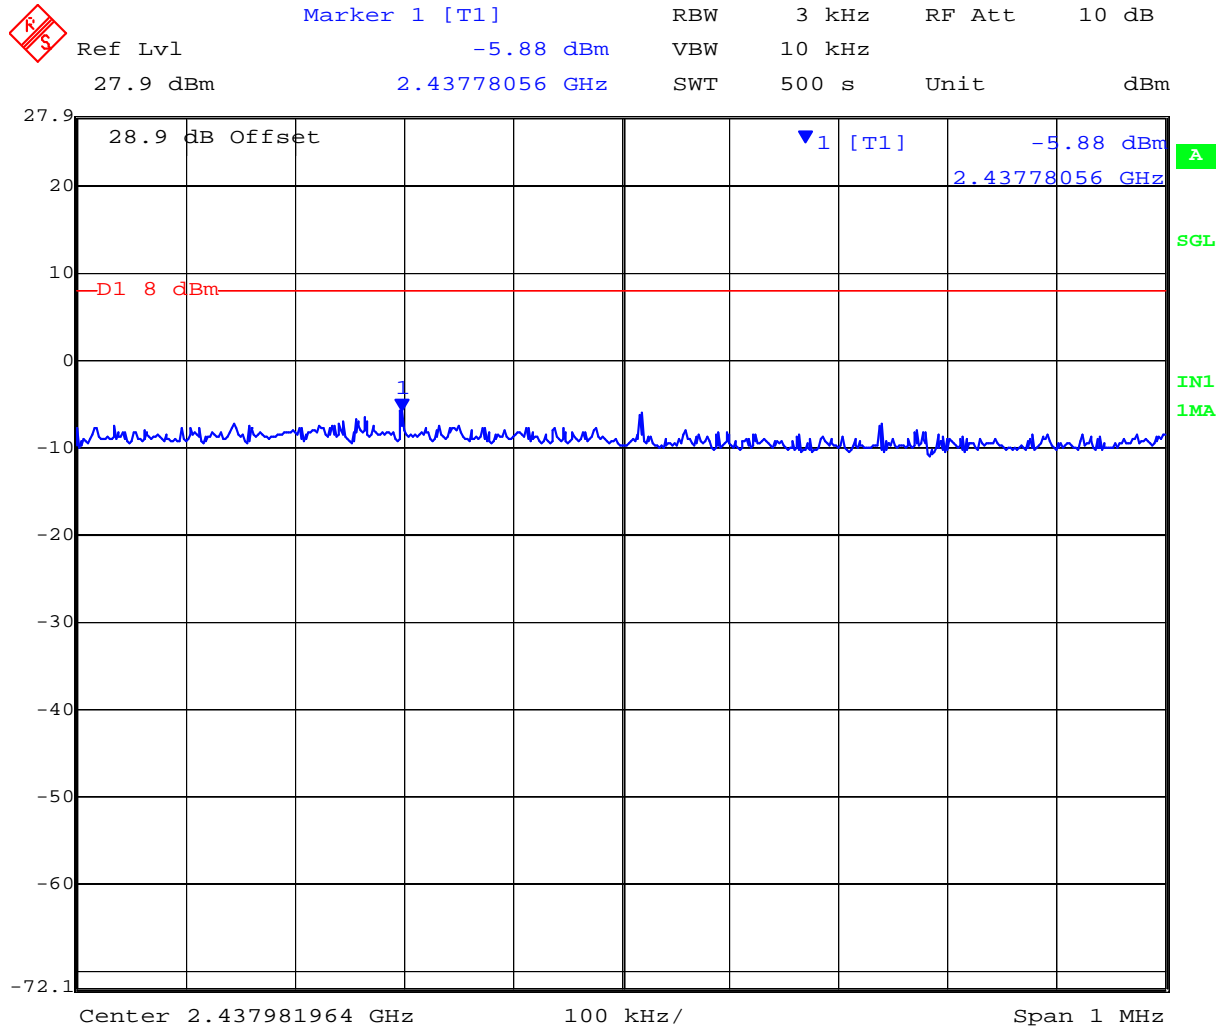


Date: 9.JUL.2007 18:35:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 43 of 133

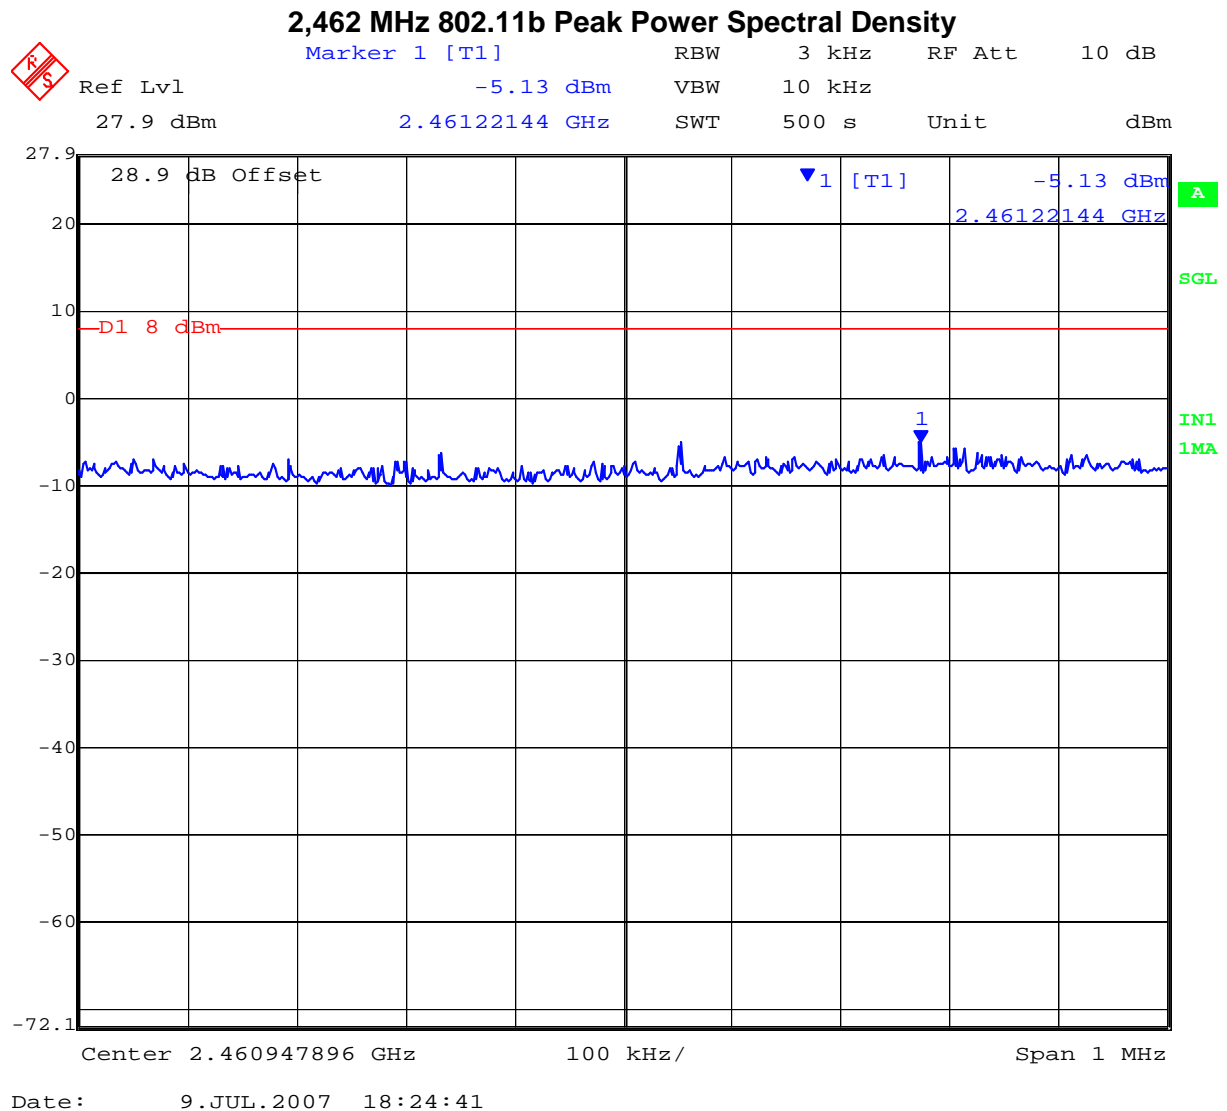

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 44 of 133

TABLE OF RESULTS – 802.11g – 6 Mb/s

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dBm)
2,412	2407.00100	-10.05	+8	-18.05
2,437	2433.24950	-8.80	+8	-16.80
2,462	2465.12124	-11.65	+8	-19.65


2,412 MHz 802.11g Peak Power Spectral Density

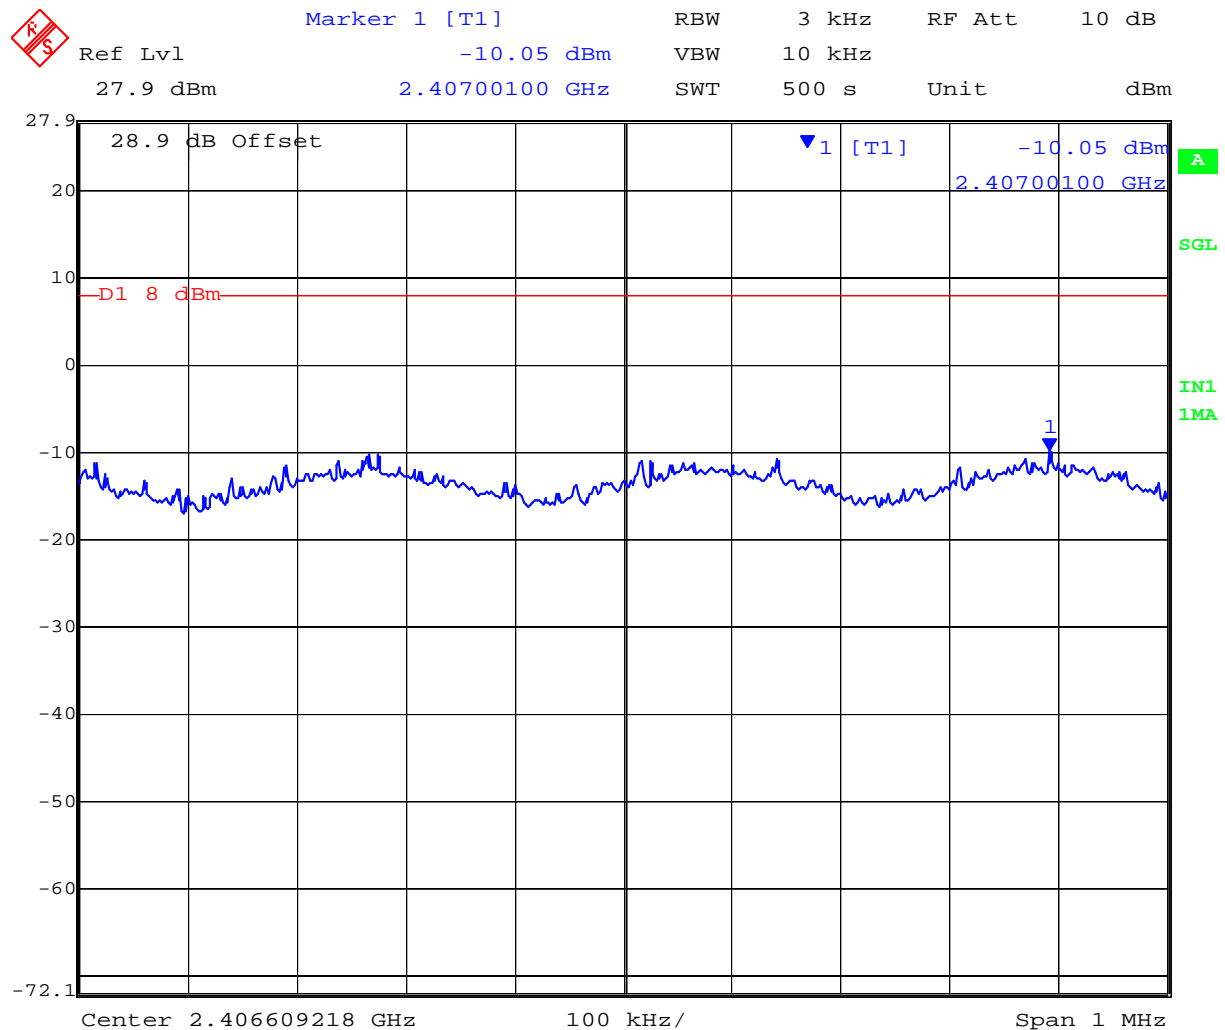

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 45 of 133

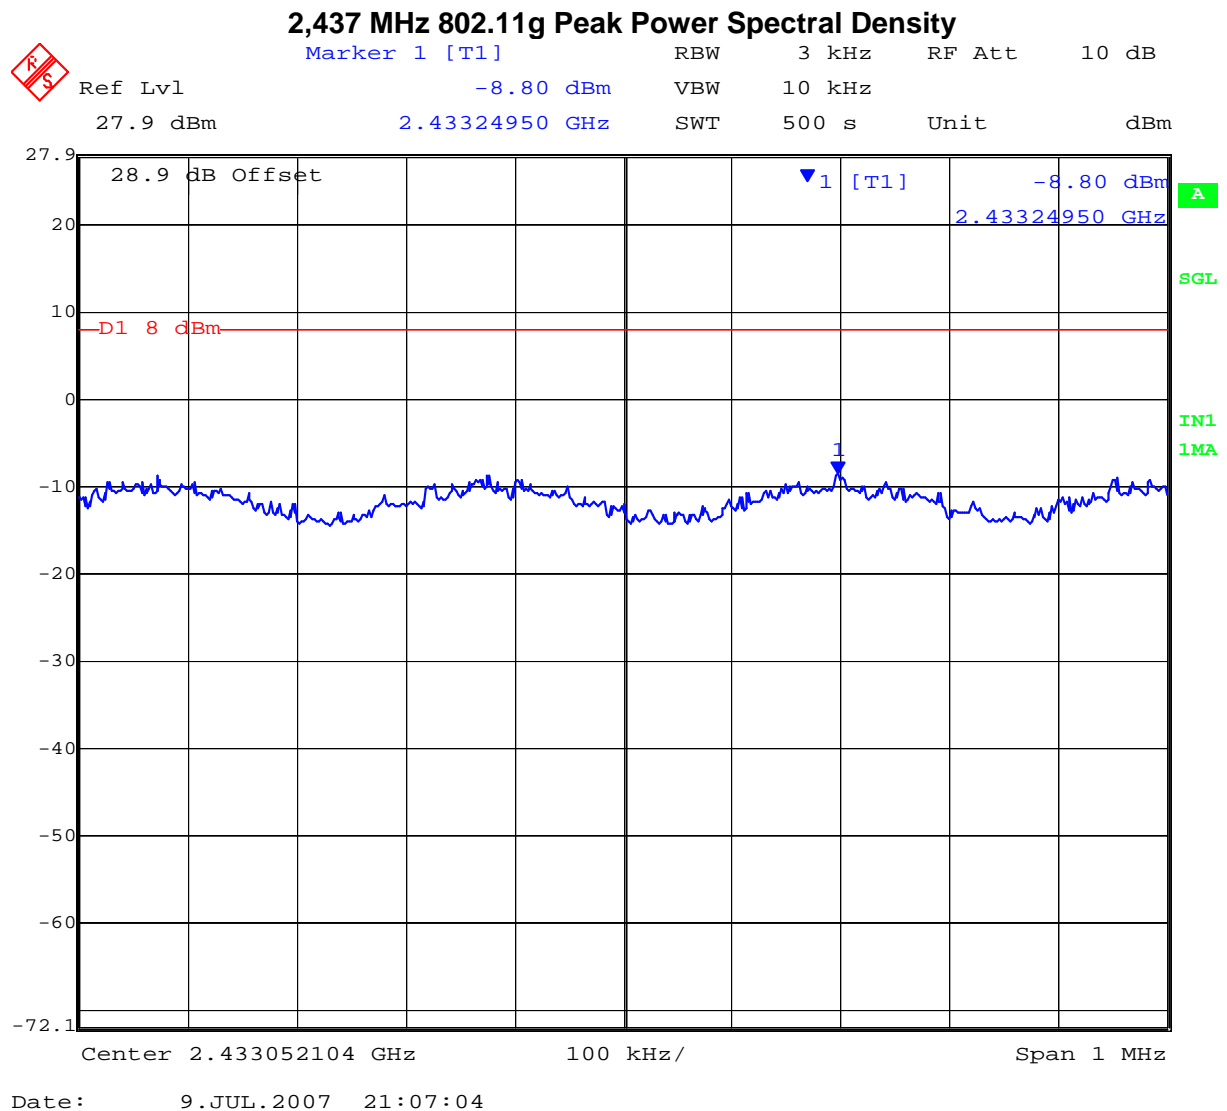


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 46 of 133

2,462 MHz 802.11g Peak Power Spectral Density

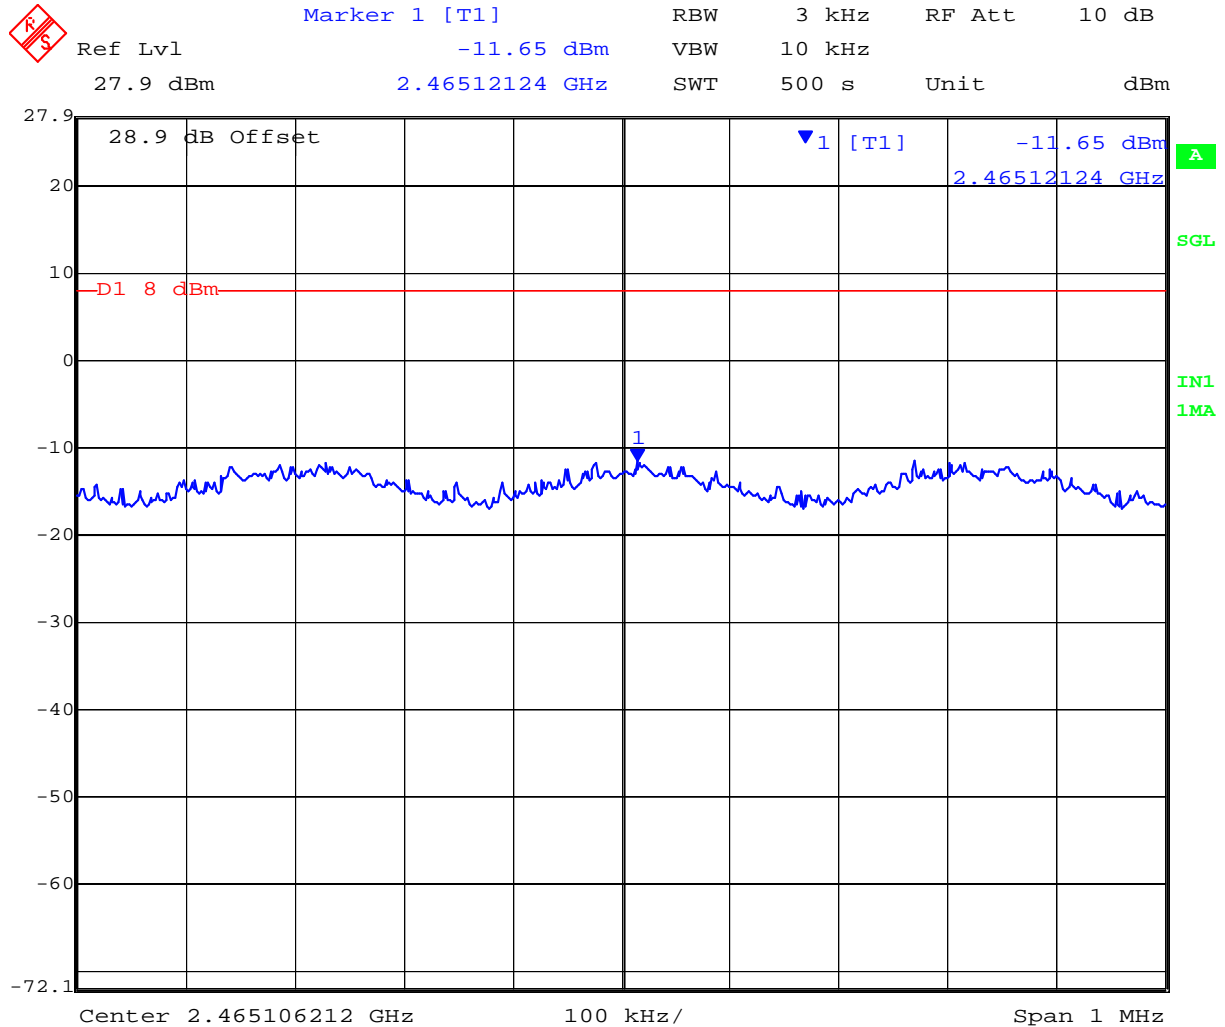

Date: 9.JUL.2007 21:20:10


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 47 of 133

TABLE OF RESULTS – 802.11a – 6Mbit/s

Center Frequency (MHz)	Peak Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dBm)
5,745	5749.39178	-10.14	+8	-18.14
5,785	5788.76854	-11.02	+8	-19.02
5,825	5829.39178	-11.48	+8	-19.48

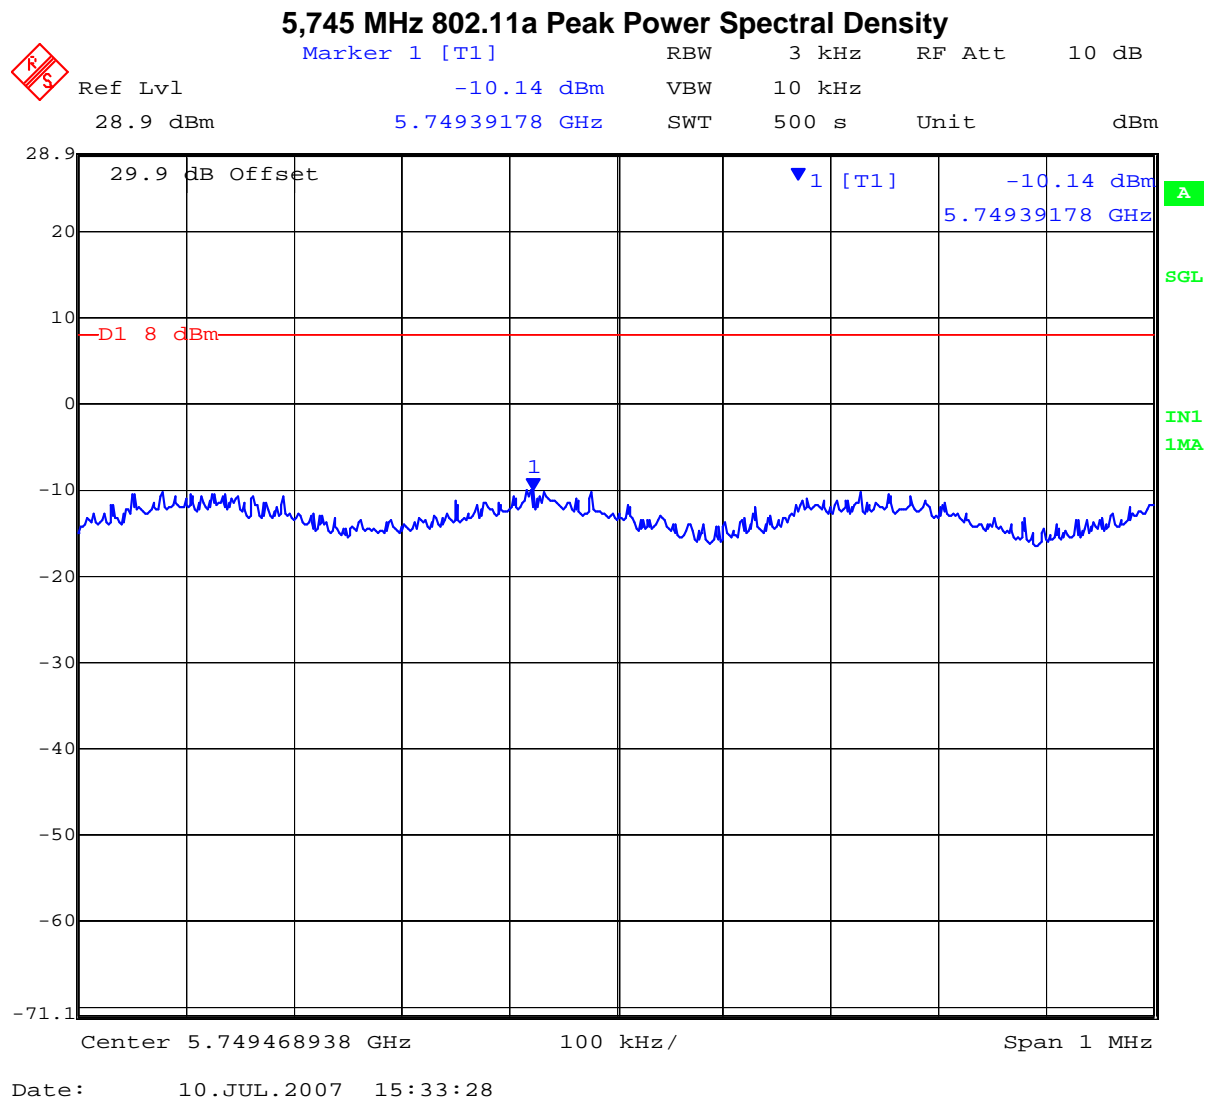

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

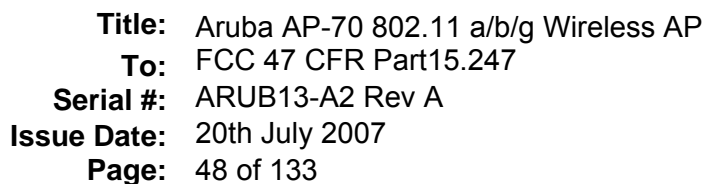

Marker 1 [T1] RBW 3 kHz RF Att 10 dB
Ref Lvl -11.02 dBm VBW 10 kHz
28.9 dBm 5.78876854 GHz SWT 500 s Unit dBm

28.9 dB Offset 1 [T1] -11.02 dBm
5.78876854 GHz

D1 8 dBm

1

Center 5.789258517 GHz 100 kHz/ Span 1 MHz


Date: 10.JUL.2007 15:22:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 49 of 133

5,825 MHz 802.11a Peak Power Spectral Density

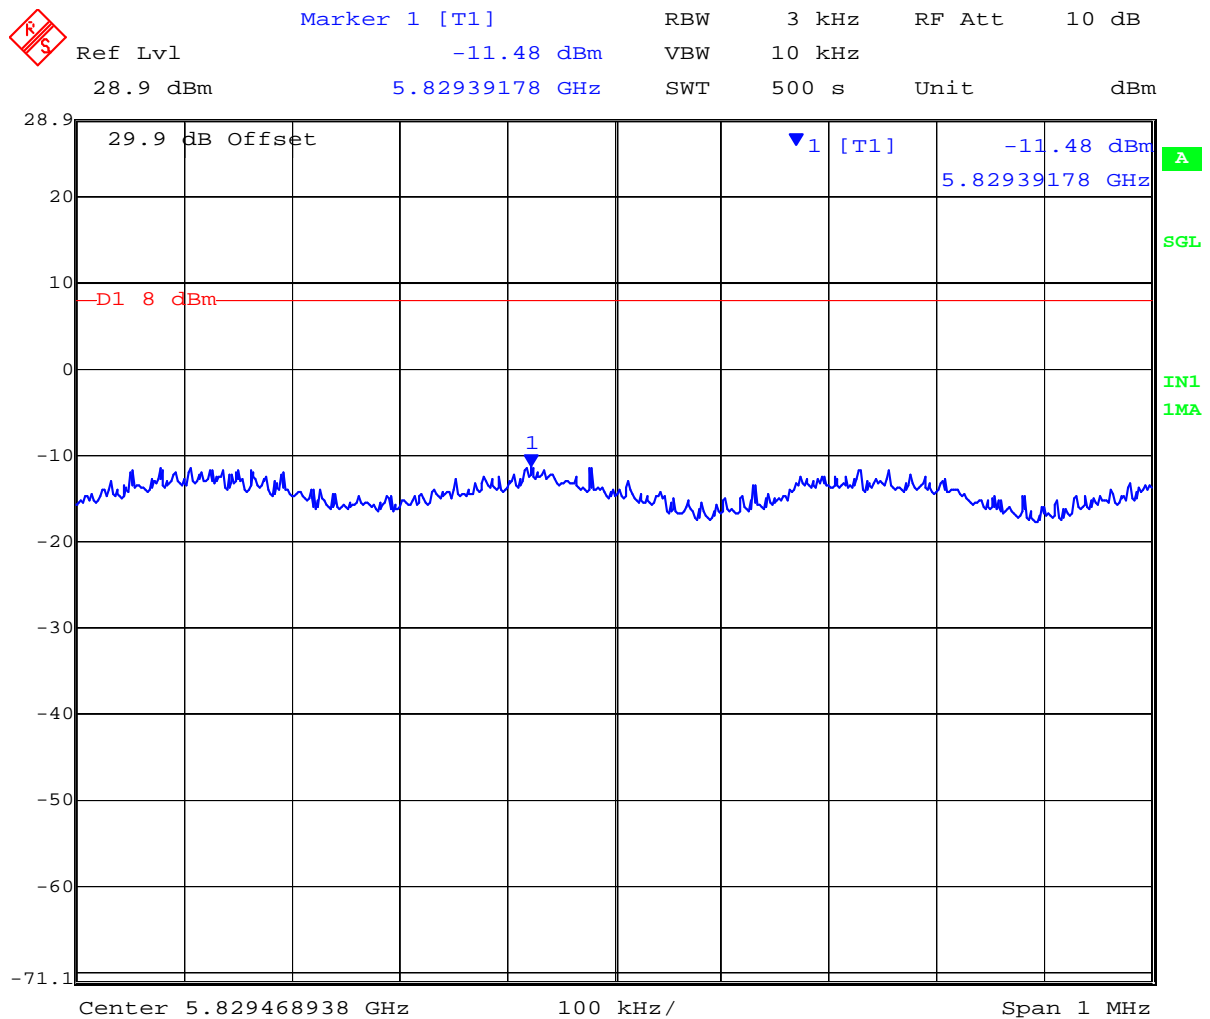

Date: 10.JUL.2007 15:45:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 50 of 133

Specification
Peak Power Spectral Density Limits

§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	± 1.33 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 51 of 133

5.1.4. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.247(i)

Calculations for Maximum Permissible Exposure Levels

Power Density = Pd (mW/cm²) = EIRP/(4πd²)

EIRP = P * G

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = 10 ^ (G (dBi)/10)

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit (cm)
2.4(b)	12	15.85	+18.75	75.0	9.8
2.4(g)	12	15.85	+22.95	197.3	15.8
5.8	14	25.12	+22.00	158.5	17.8

Specification

Maximum Permissible Exposure Limits

§15.247(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines.

Limit S = 1mW / cm² from 1.310 Table 1

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.5. Conducted Spurious Emissions

FCC, Part 15 Subpart C §15.247(d); 15.205; 15.209

Test Procedure

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

Test Measurement Set up



Band-edge measurement test configuration

Measurement Results of Conducted Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 53 of 133


Conducted Band-Edge Results

Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the band-edge measurements provided below are drawn on each plot.

TABLE OF RESULTS – 802.11b – 1 Mbit/s

Center Frequency (MHz)	Band edge Frequency (MHz)	Limit (20 dB below peak of fundamental)	Amplitude @ Band edge (dBm)	Margin (dB)
2,412	2,400	-13.52	-36.90	-23.38
2,462	2,483.5	-13.52	-46.88	-33.36

Conducted Spurious Emissions at the 2,400 MHz Band Edge

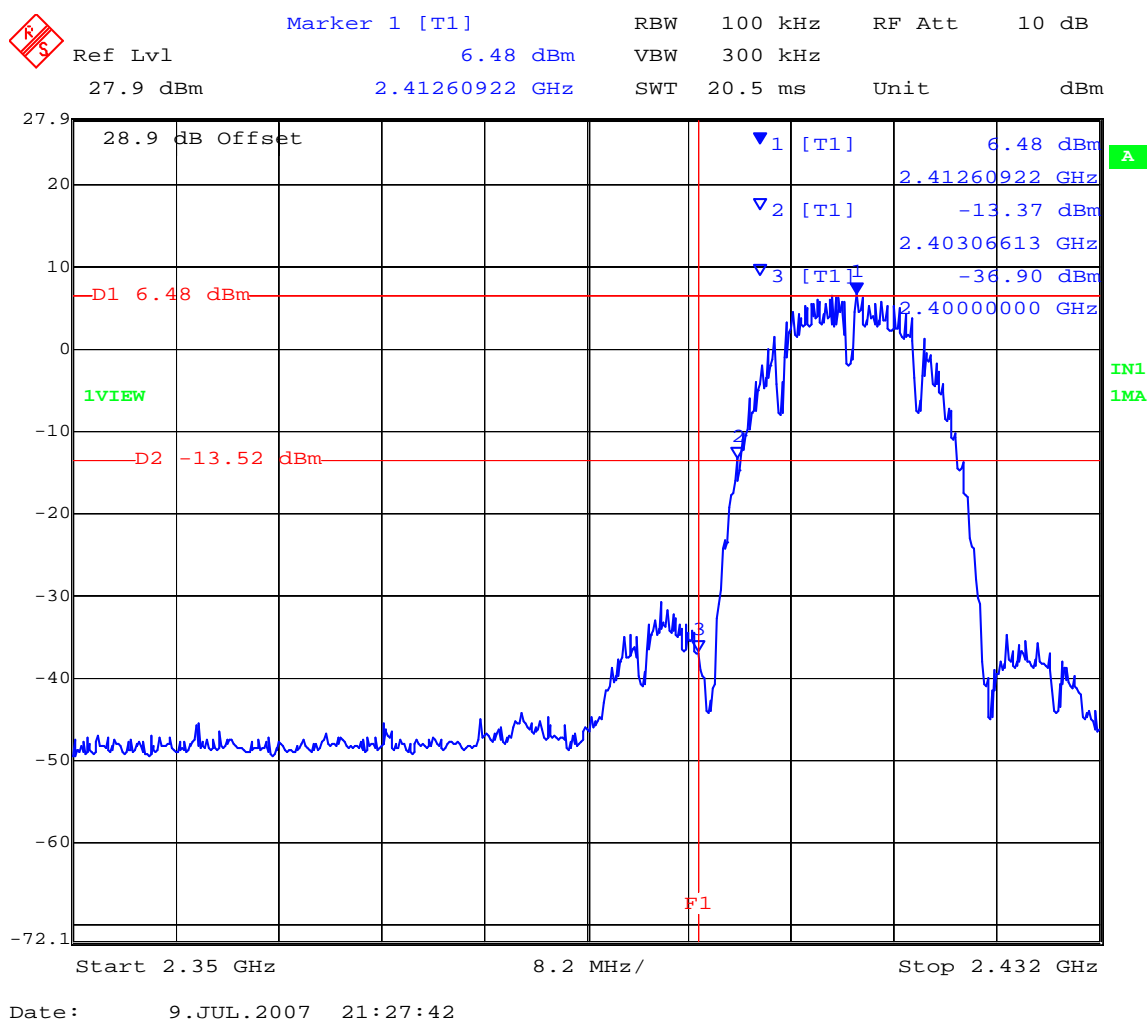

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 54 of 133

Conducted Spurious Emissions at the 2,483.5 MHz Band Edge



Date: 9.JUL.2007 21:29:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 55 of 133

TABLE OF RESULTS – 802.11g – 6 Mbit/s

Center Frequency (MHz)	Band edge Frequency (MHz)	Limit (20 dB below peak of fundamental)	Amplitude @ Band edge (dBm)	Margin (dB)
2,412	2,400	-18.03	-27.90	-9.87
2,462	2,483.5	-18.03	-43.90	-25.87

Conducted Spurious Emissions at the 2,400 MHz Band Edge

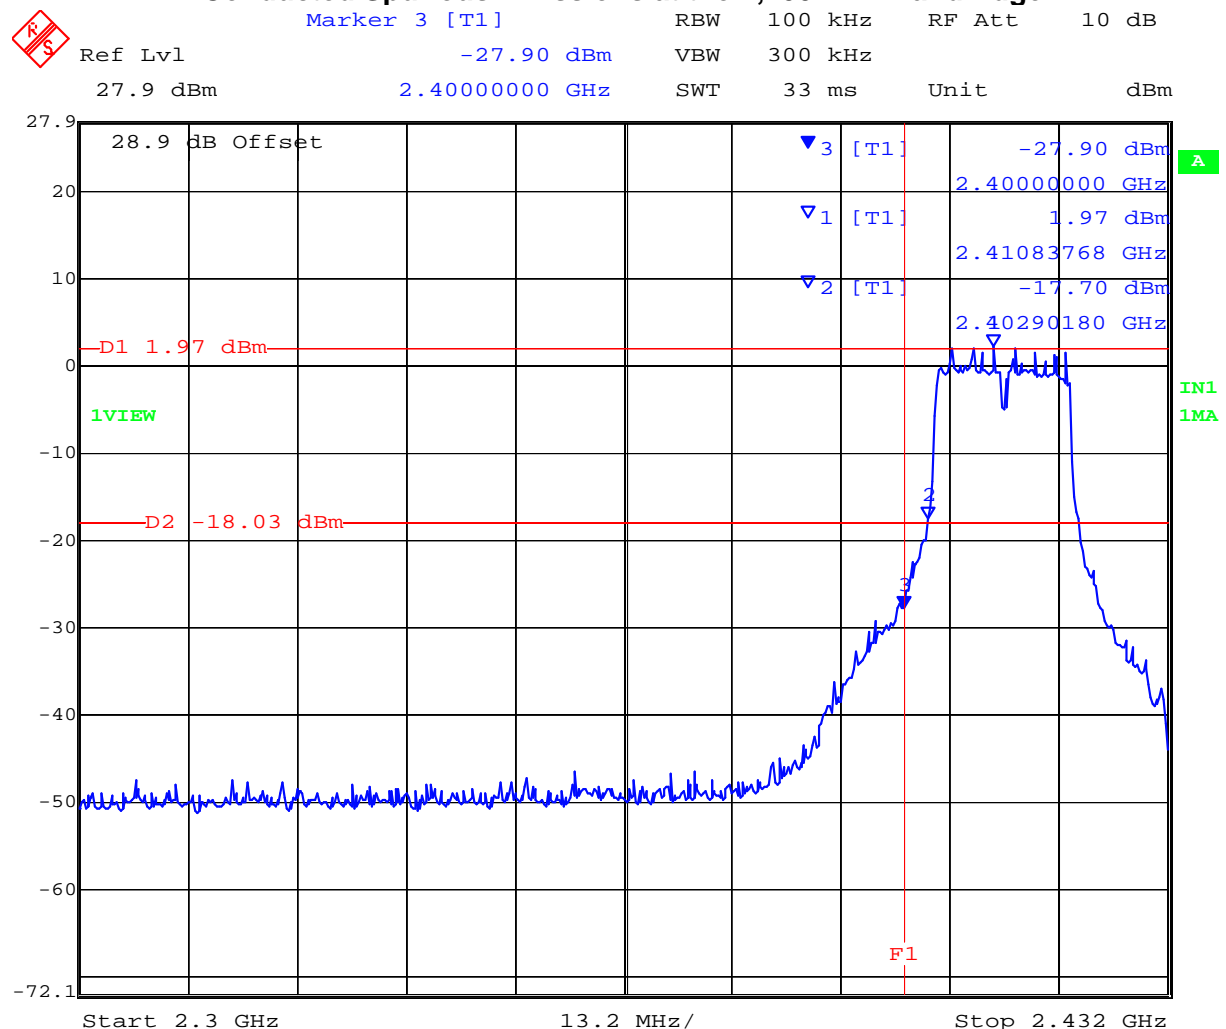


Date: 9.JUL.2007 21:25:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 56 of 133

Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

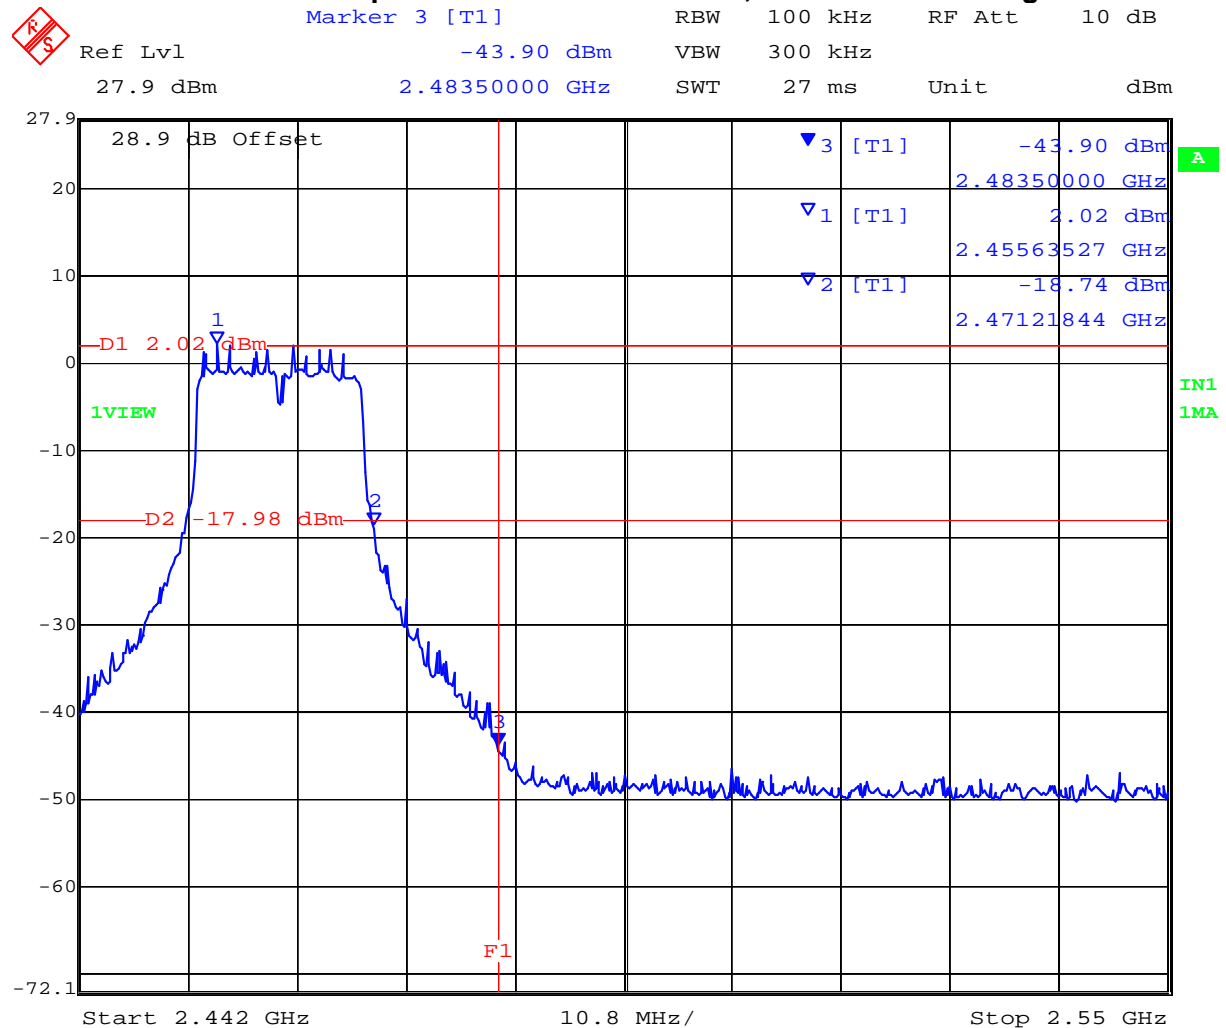

Date: 9.JUL.2007 21:22:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 57 of 133

TABLE OF RESULTS – 802.11a – 6Mbit/s

Center Frequency (MHz)	Band edge Frequency (MHz)	Limit (20 dB below peak of fundamental)	Amplitude @ Band edge (dBm)	Margin (dB)
5,745	5,725	-16.44	-29.73	-13.29
5,825	5,850	-16.44	-44.63	-28.19

Conducted Spurious Emissions at the 5,725 MHz Band Edge

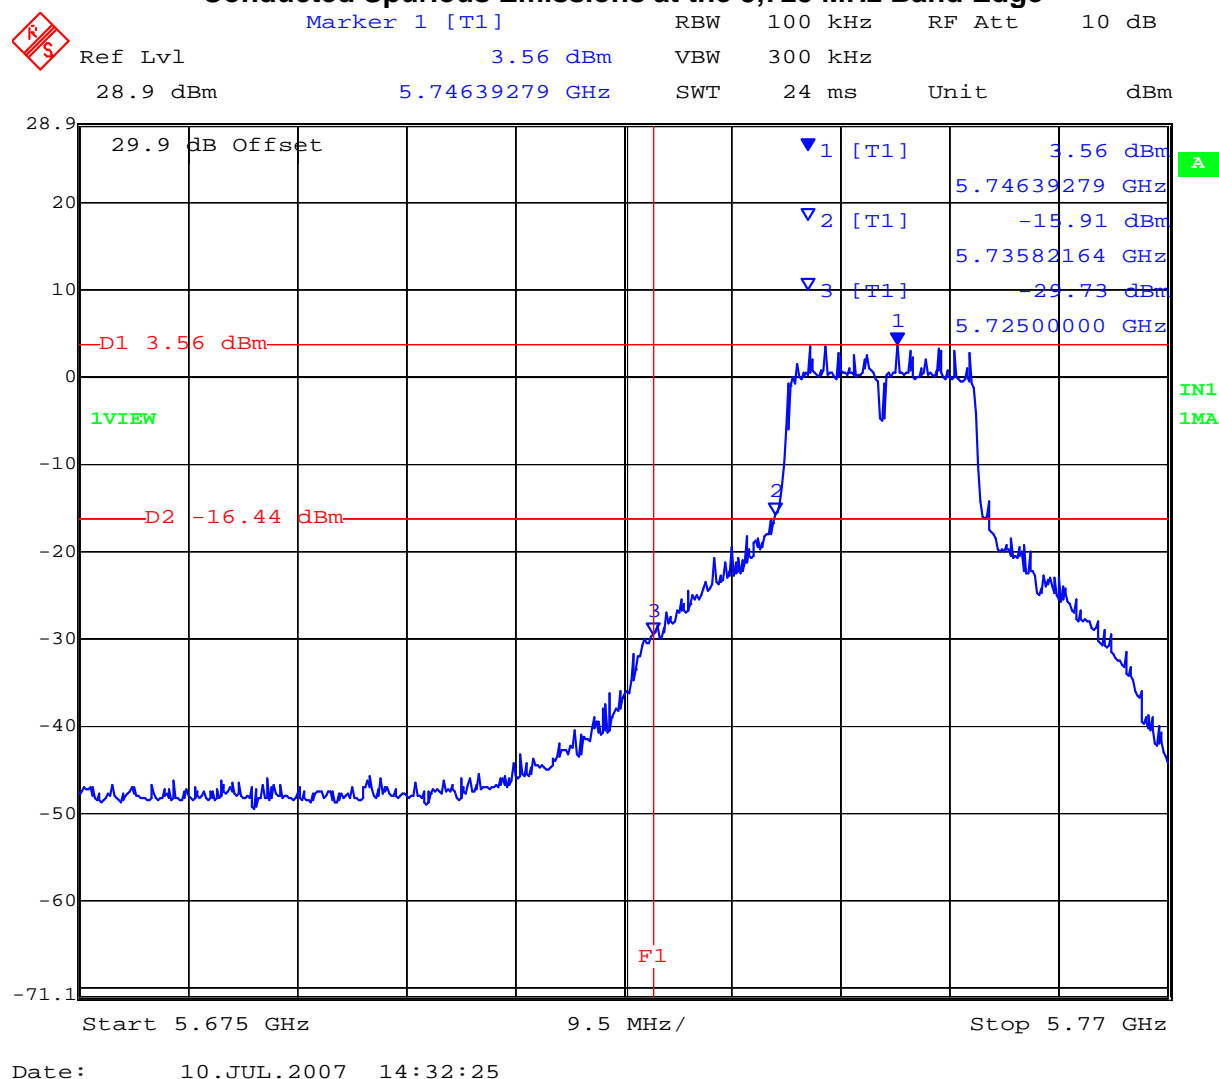


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 58 of 133

Conducted Spurious Emissions at the 5,850 MHz Band Edge

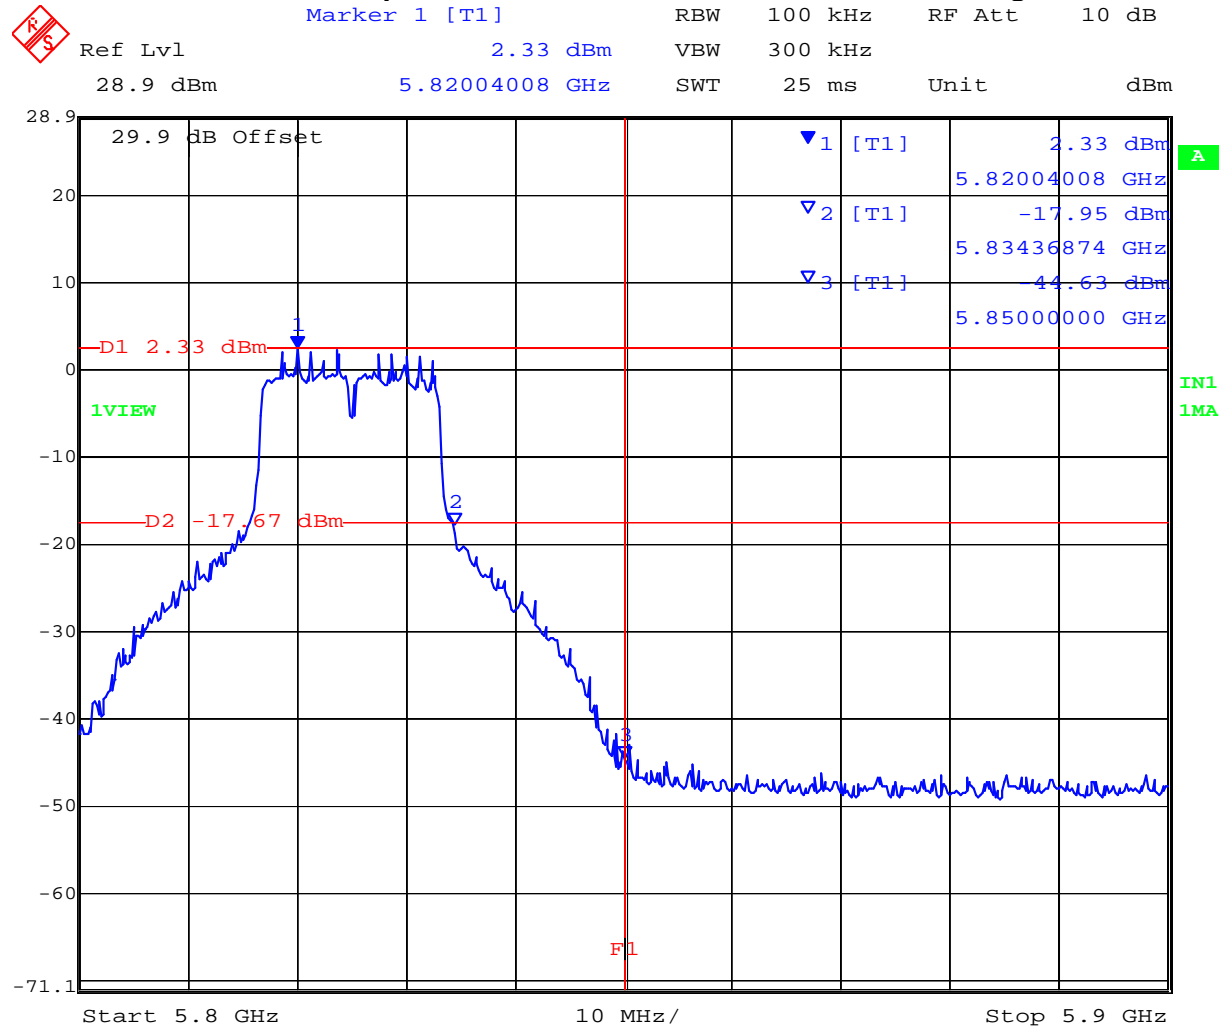

Date: 10.JUL.2007 14:29:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 59 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11b – 1 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Plot #	Margin (dB)
2,412	30	7,000	-45.17	-14.61	16	-30.56
2,412	7,000	26,000	-33.13	-14.61	17	-18.52

802.11b – 1 Mbit/s

2,412 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

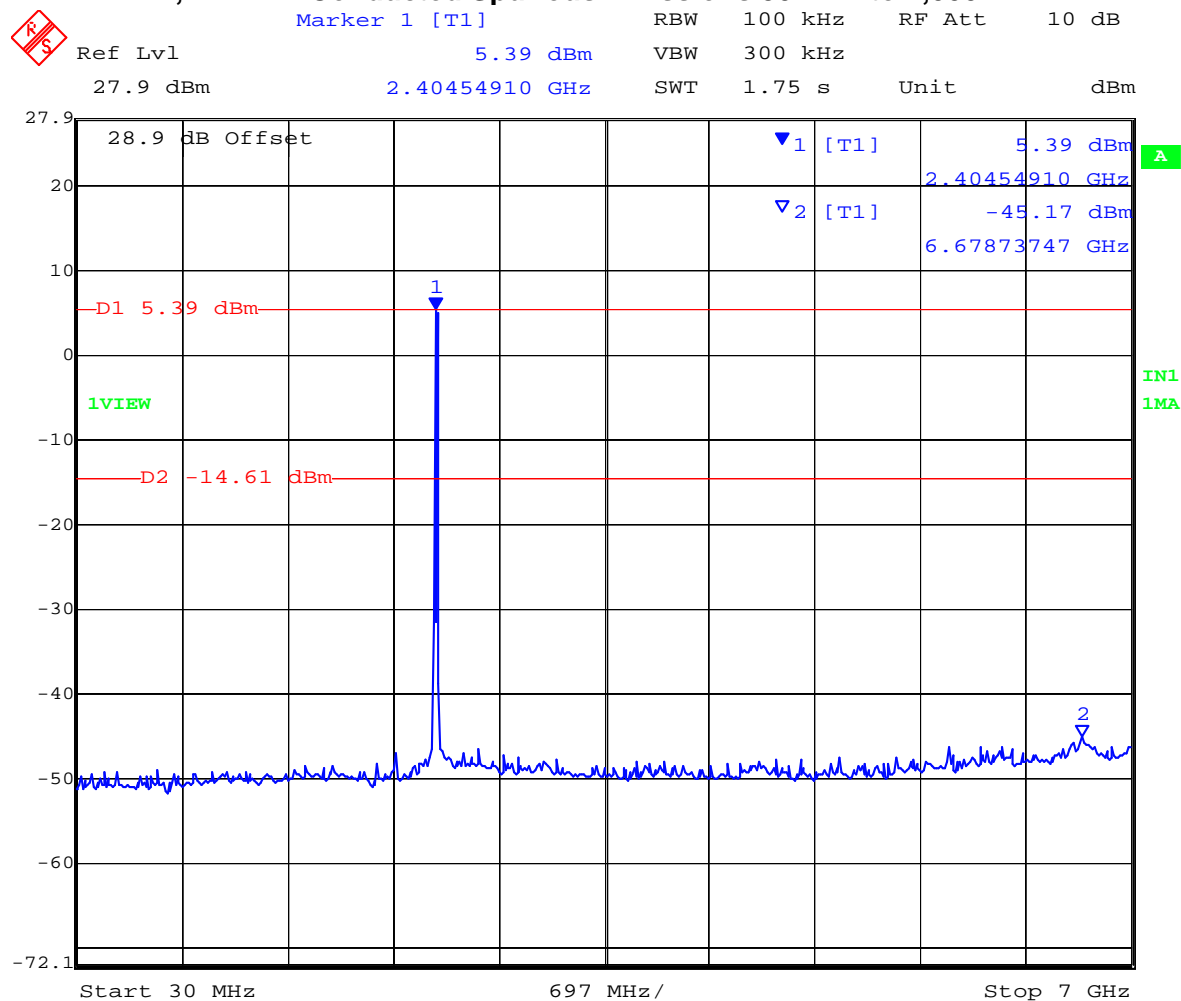

Date: 9.JUL.2007 21:35:58


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 60 of 133

802.11b – 1 Mbit/s

2,412 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

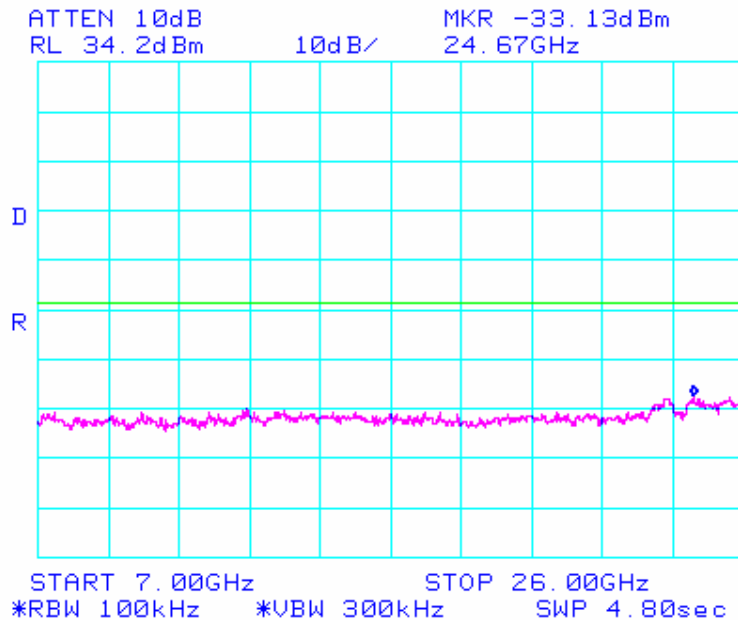

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 61 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11b – 1 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
2,437	30	7,000	-44.96	-14.49	-30.47
2,437	7,000	26,000	-32.47	-14.49	-17.98

802.11b – 1 Mbit/s

2,437 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

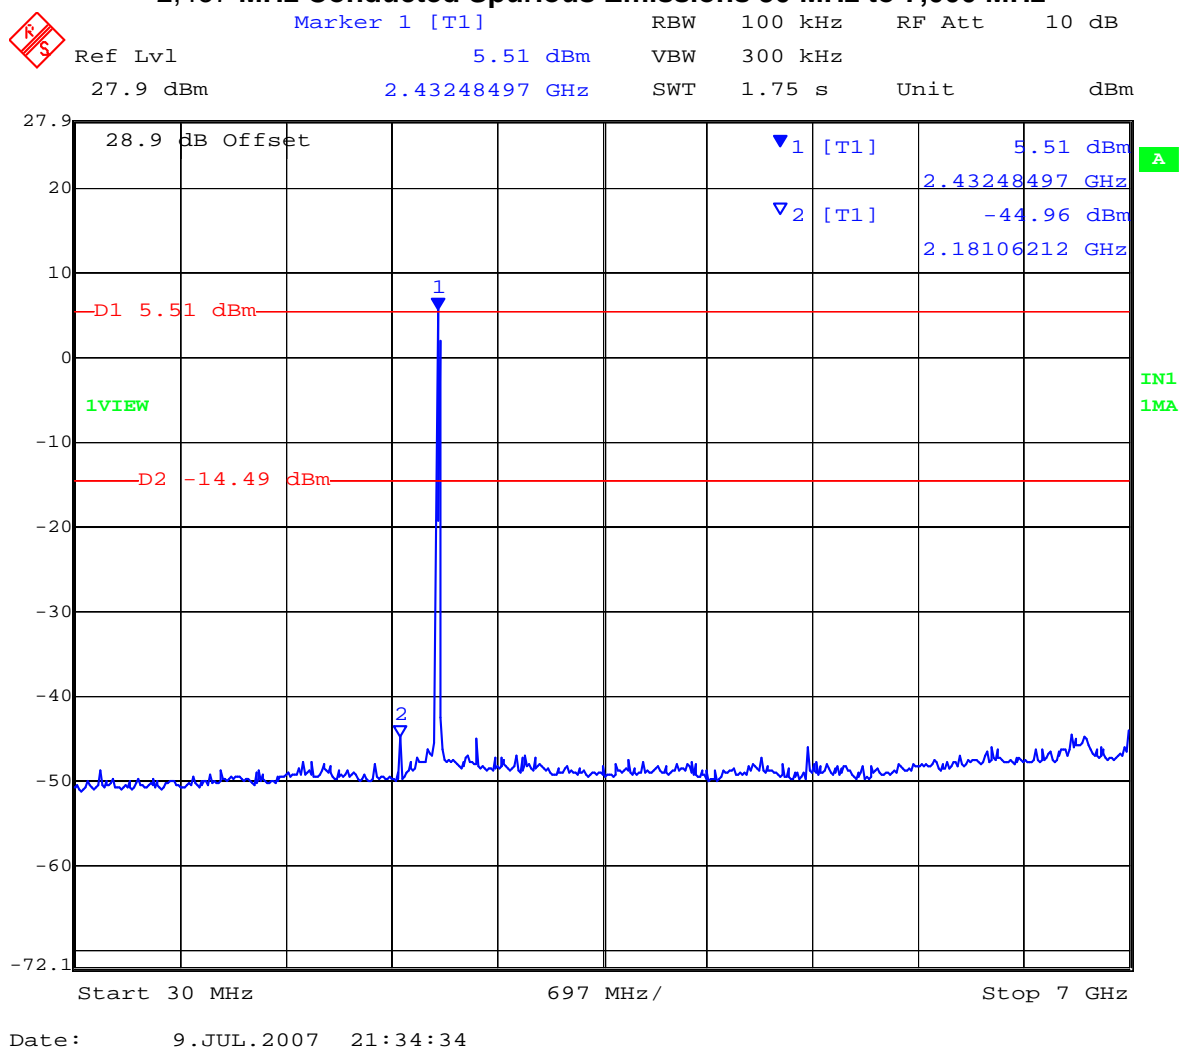


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 62 of 133

802.11b – 1 Mbit/s

2,437 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

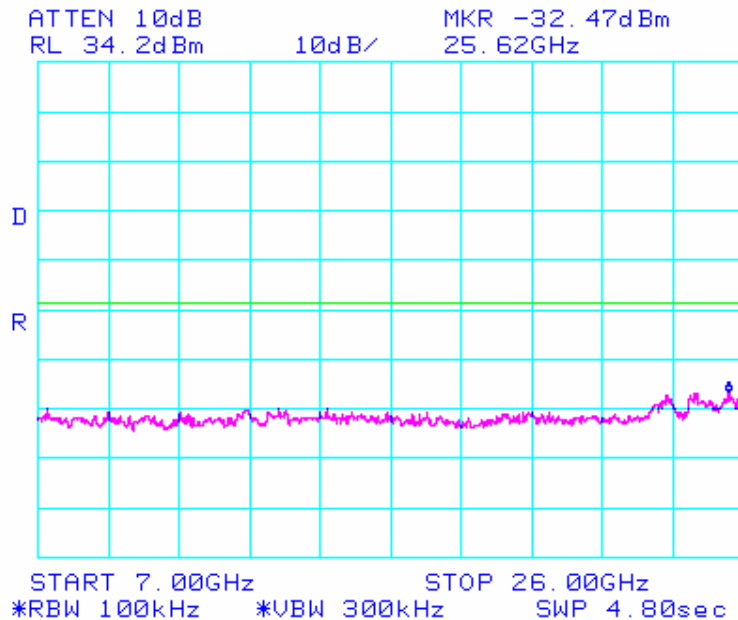

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 63 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11b – 1 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
2,462	30	7,000	-43.15	-13.83	-29.32
2,462	7,000	26,000	-32.13	-13.83	-18.30

802.11b – 1 Mbit/s

2,462 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

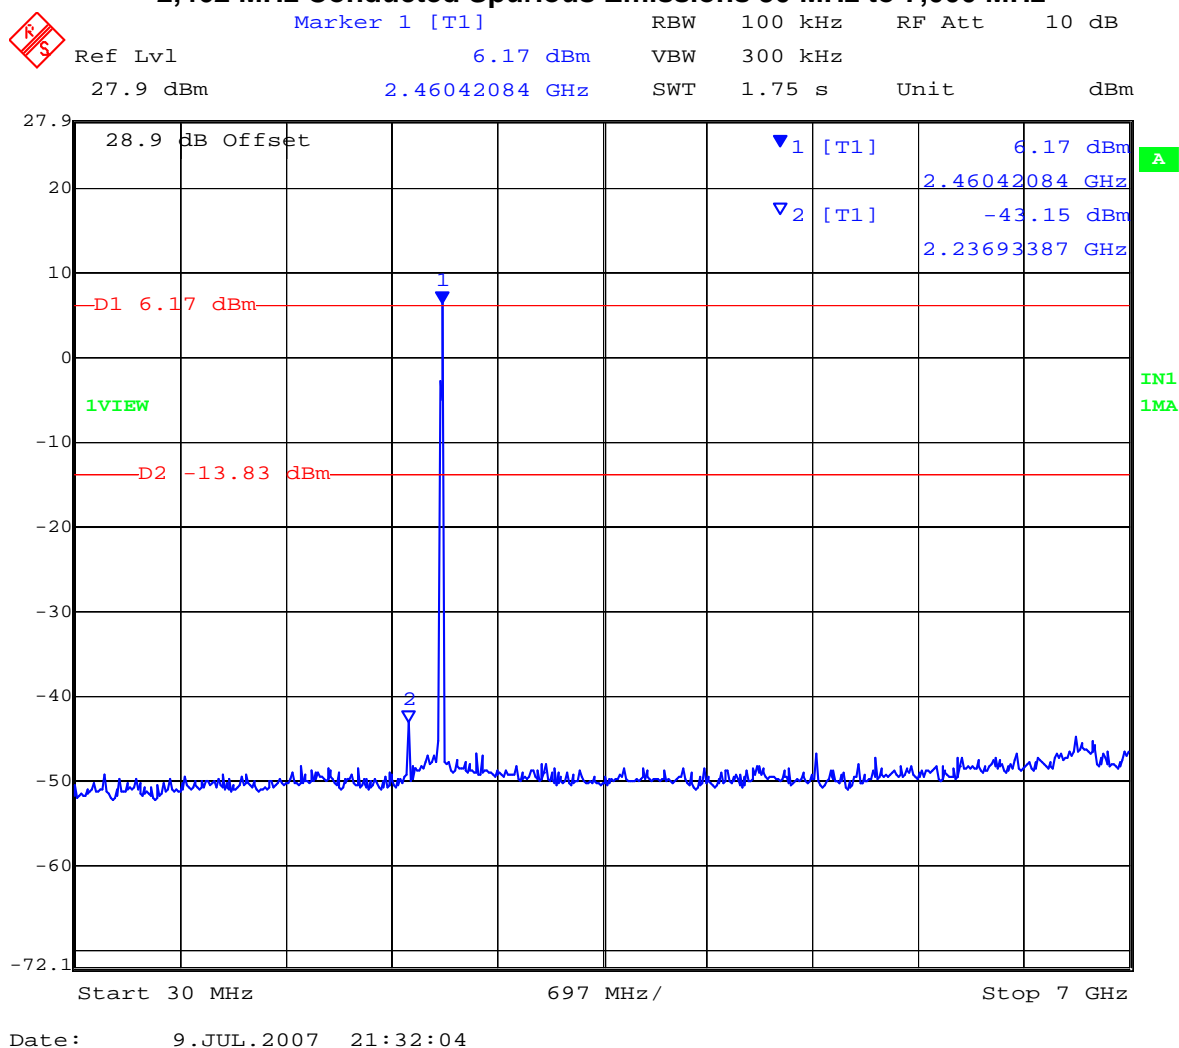


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 64 of 133

802.11b – 1 Mbit/s

2,462 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

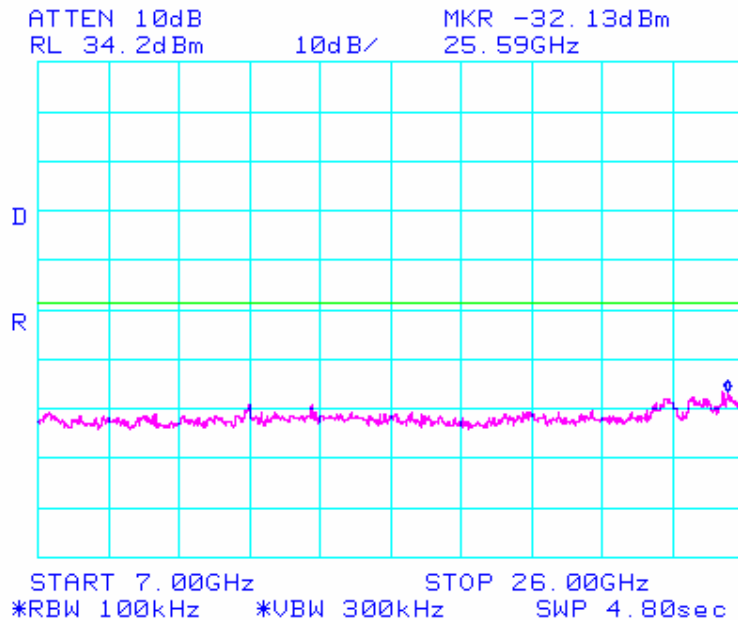

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 65 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11g – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Plot #	Margin (dB)
2,412	30	7,000	-45.67	-17.62	22	-28.05
2,412	7,000	26,000	-32.63	-17.62	23	-15.01

802.11g – 6 Mbit/s

2,412 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

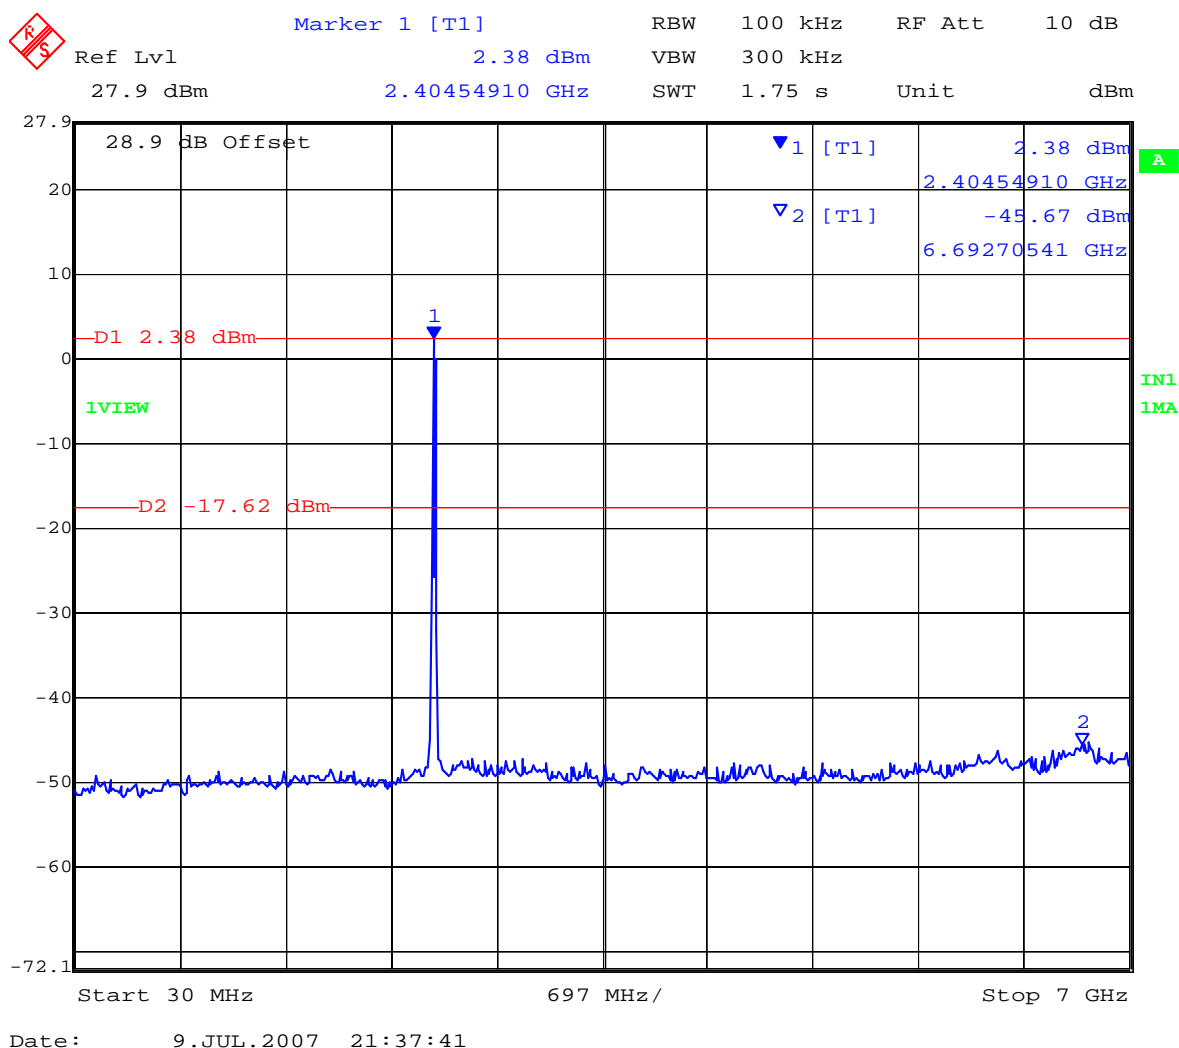


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 66 of 133

802.11g – 6 Mbit/s

2,412 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

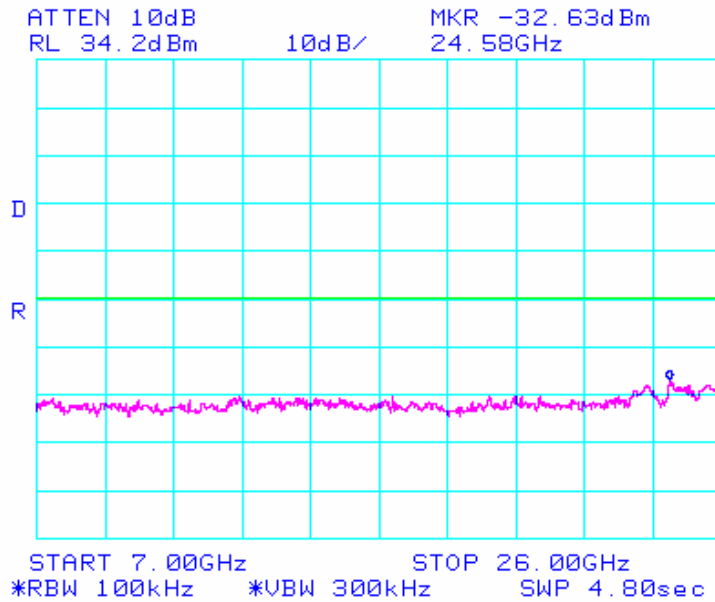

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 67 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11g – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
2,437	30	7,000	-45.05	-15.5	-29.55
2,437	7,000	26,000	-33.47	-15.5	-17.97

802.11g – 6 Mbit/s

2,437 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

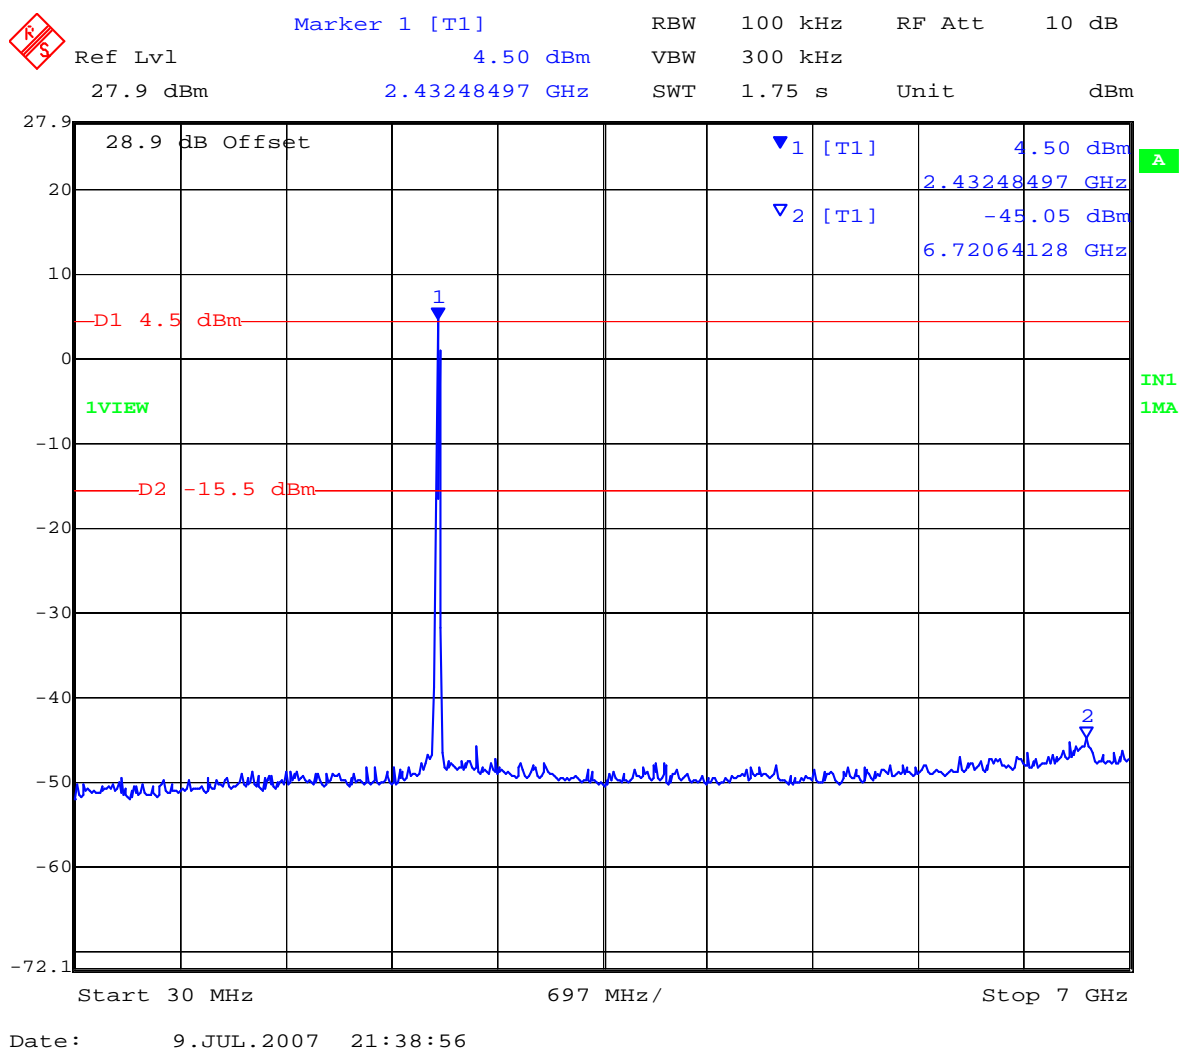


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 68 of 133

802.11g – 6 Mbit/s

2,437 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

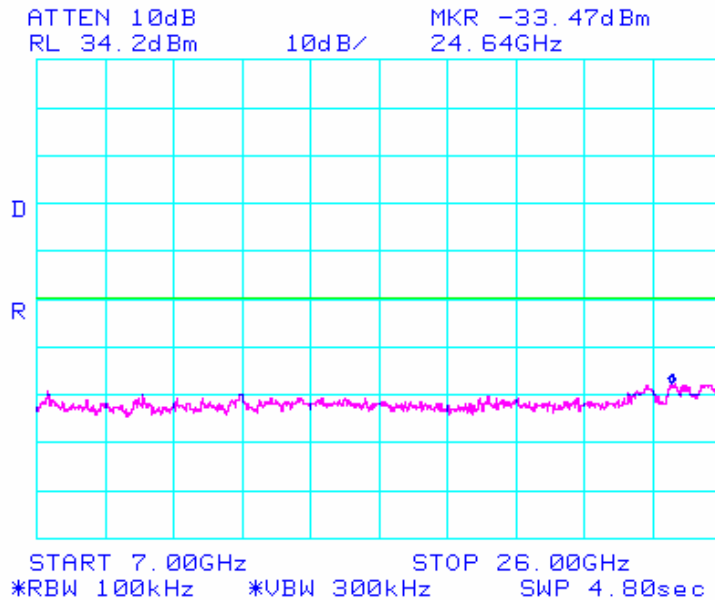

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 69 of 133


Spurious Emissions (30 - 26,000 MHz)

TABLE OF RESULTS – 802.11g – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
2,462	30	7,000	-45.49	-18.22	-27.27
2,462	7,000	26,000	-32.13	-18.22	-13.91

802.11g – 6 Mbit/s

2,462 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

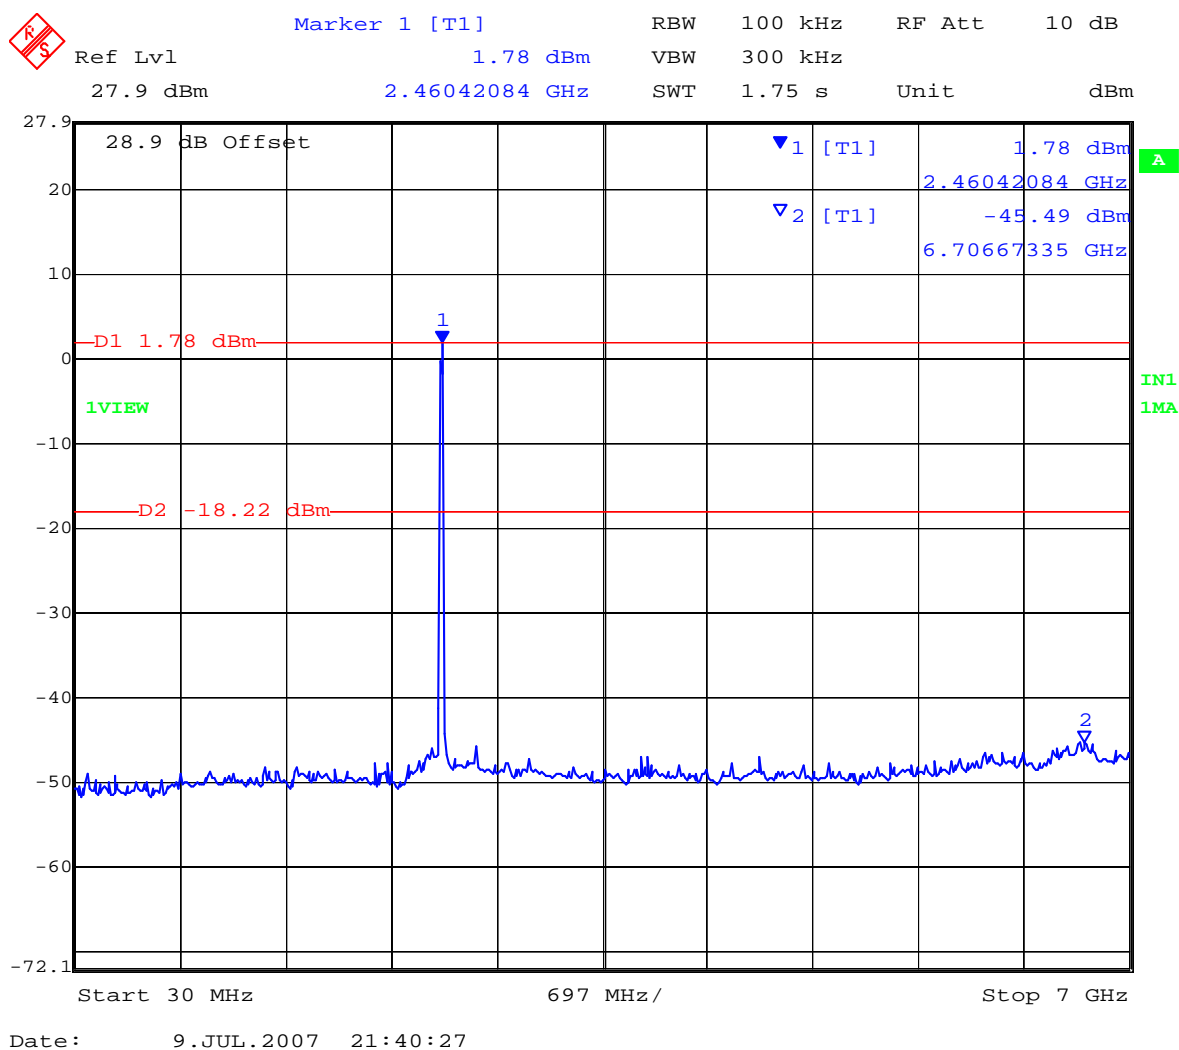


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 70 of 133

802.11g – 6 Mbit/s

2,462 MHz Conducted Spurious Emissions 7,000 MHz to 26,000 MHz

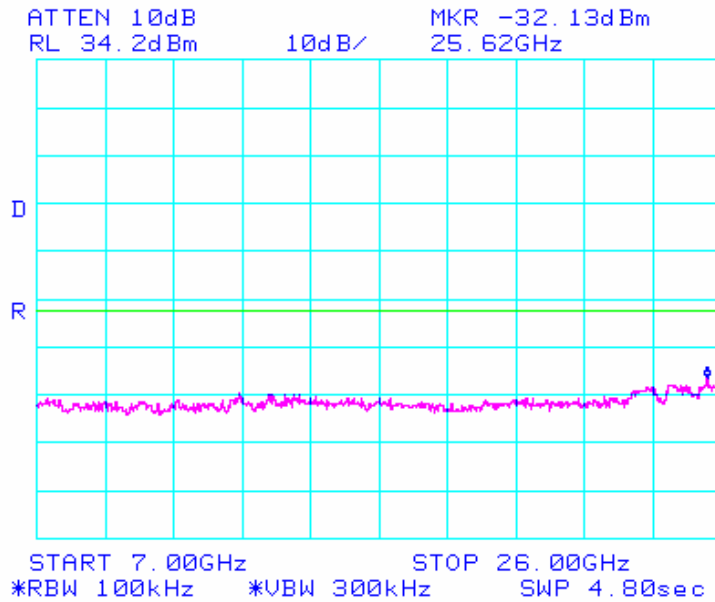

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 71 of 133


Spurious Emissions (30 - 40,000 MHz)

TABLE OF RESULTS – 802.11a – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
5,745	30	7,000	-34.29	-18.03	-16.26
5,745	7,000	40,000	-24.80	-18.03	-6.77

802.11a – 6 Mbit/s

5,745 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

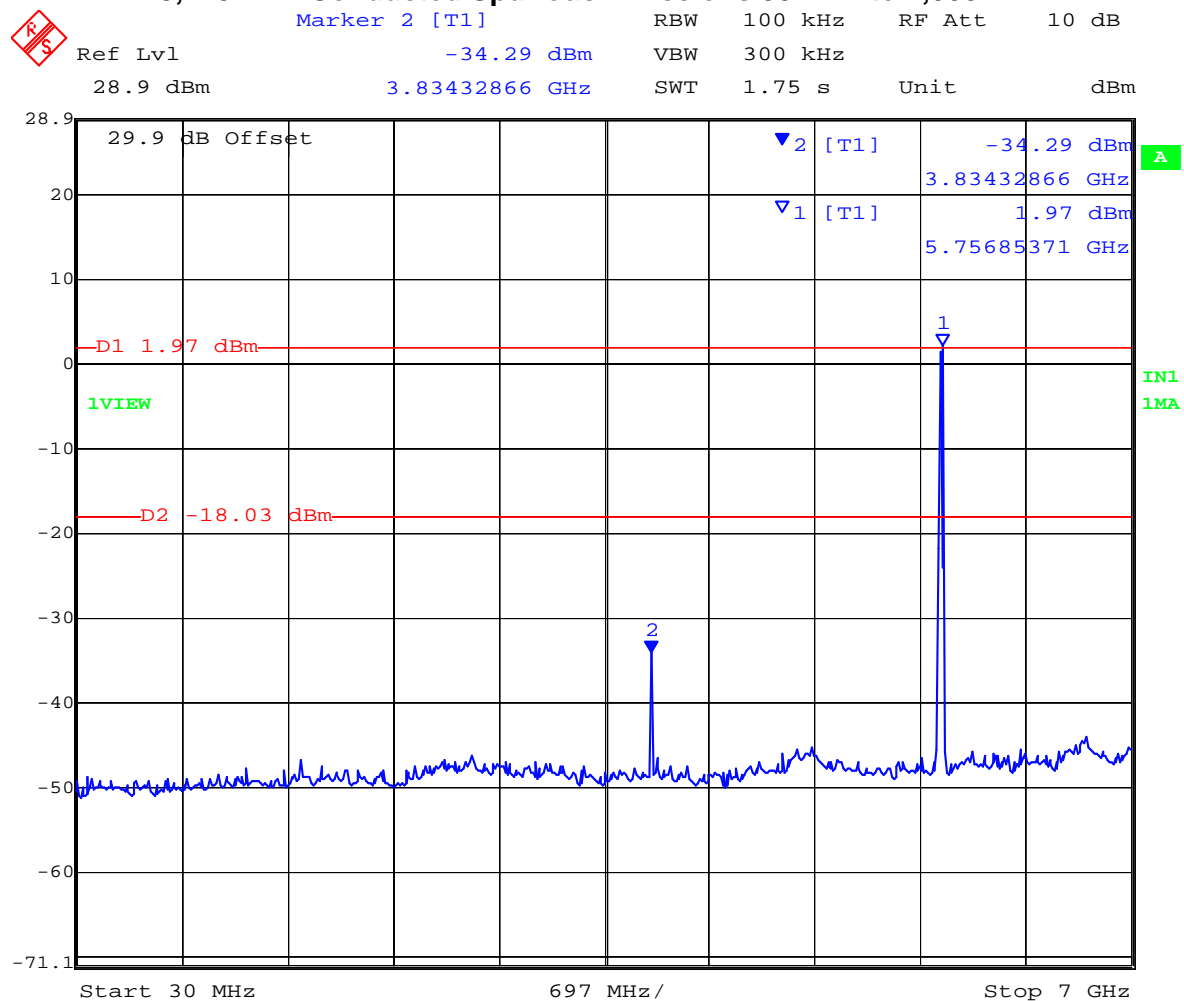

Date: 10.JUL.2007 14:23:10


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 72 of 133

802.11a – 6 Mbit/s

5,745 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

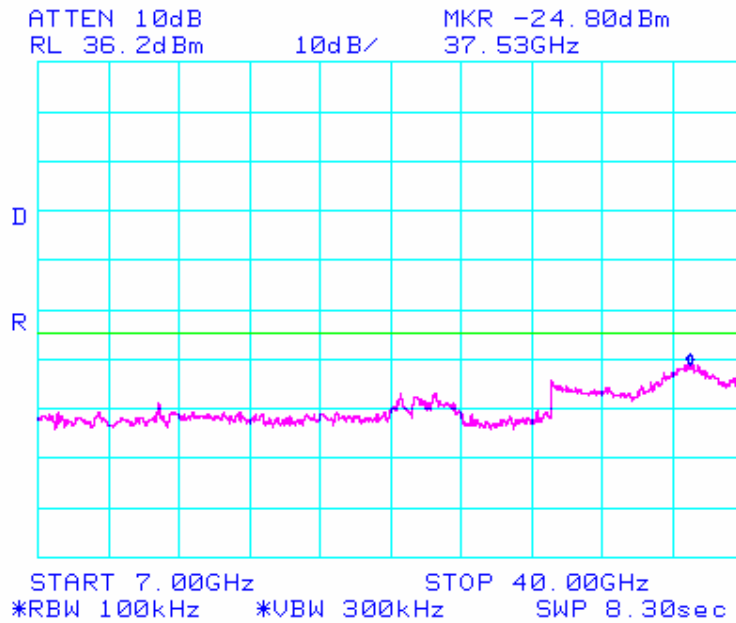

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 73 of 133


Spurious Emissions (30 - 40,000 MHz)

TABLE OF RESULTS – 802.11a – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
5,785	30	7,000	-33.67	-18.30	-15.37
5,785	7,000	40,000	-24.80	-18.30	-6.50

802.11a – 6 Mbit/s

5,785 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

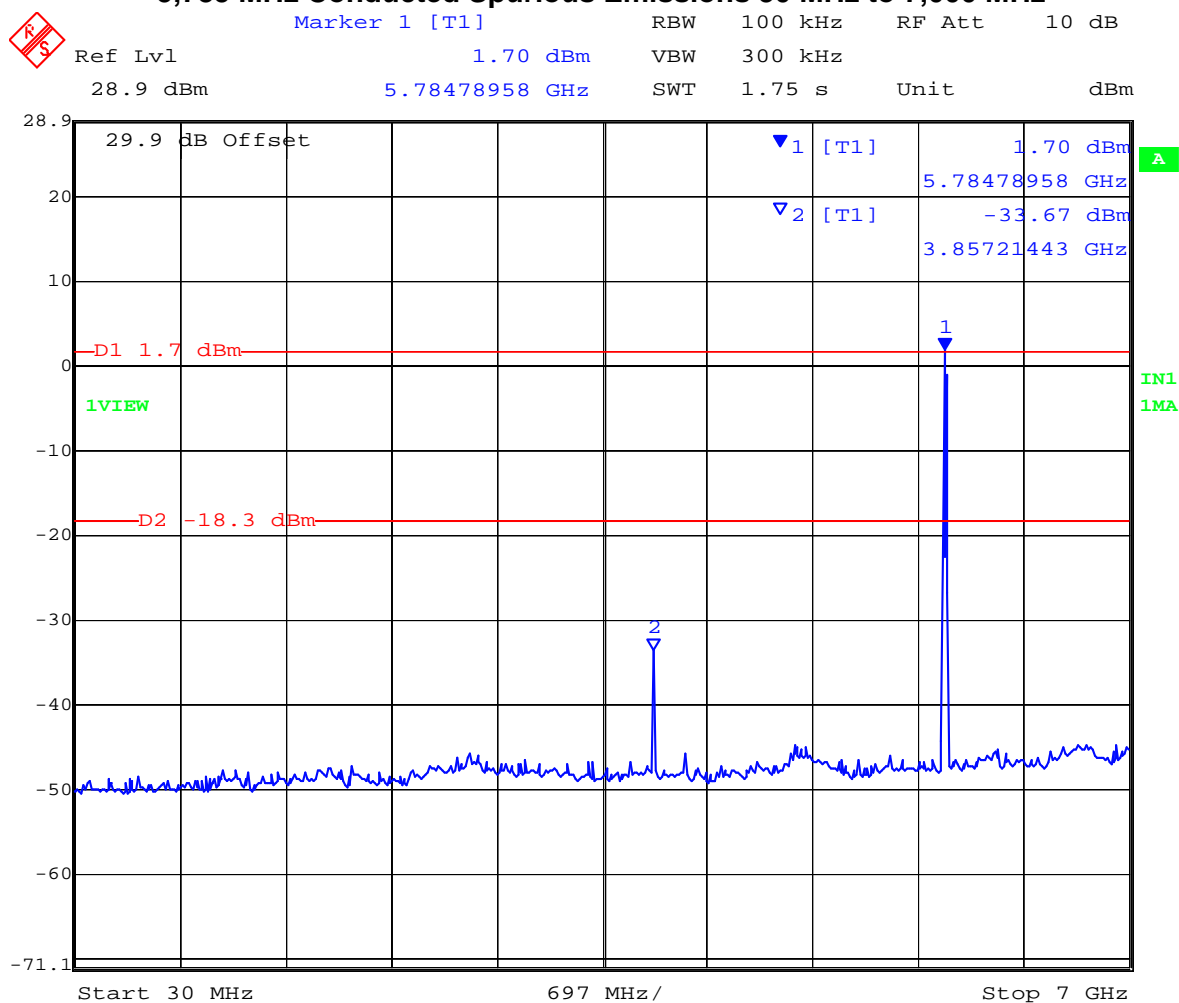

Date: 10.JUL.2007 14:25:27


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 74 of 133

802.11a – 6 Mbit/s

5,785 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

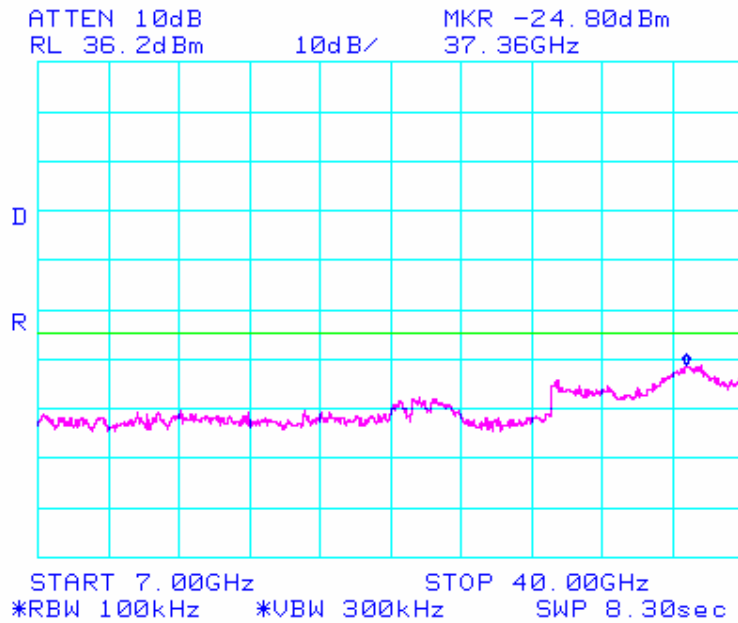

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 75 of 133


Spurious Emissions (30 - 40,000 MHz)

TABLE OF RESULTS – 802.11a – 6 Mbit/s

Channel Centre Frequency (MHz)	Start Frequency (MHz)	Stop Frequency (MHz)	Maximum Emission Observed (dBm)	Limit (dBm)	Margin (dB)
5,825	30	7,000	-29.66	-18.19	-11.47
5,825	7,000	40,000	-24.80	-18.19	-6.61

802.11a – 6 Mbit/s

5,825 MHz Conducted Spurious Emissions 30 MHz to 7,000 MHz

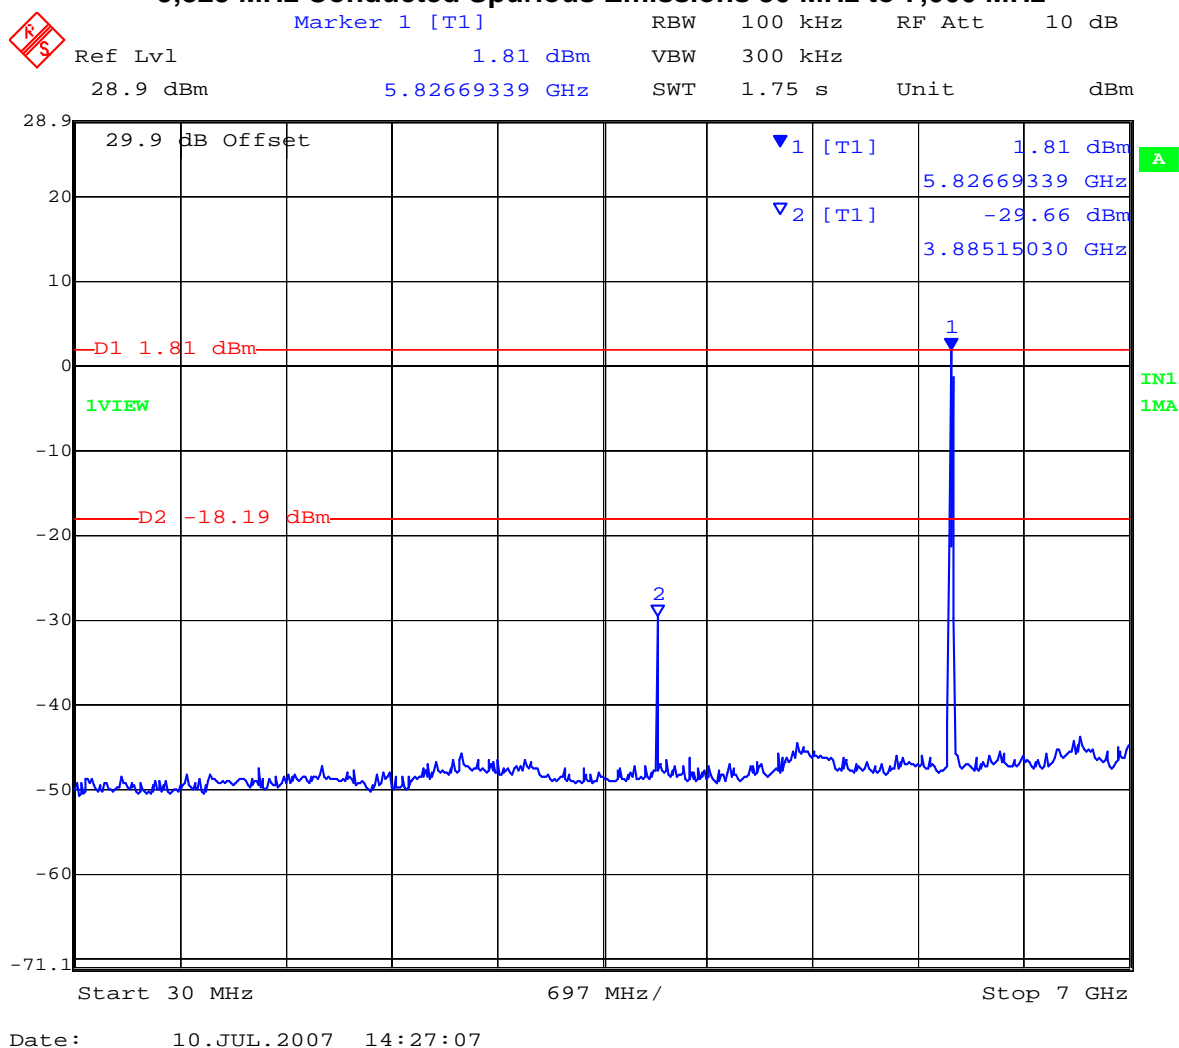


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 76 of 133

802.11a – 6 Mbit/s

5,825 MHz Conducted Spurious Emissions 7,000 MHz to 40,000 MHz

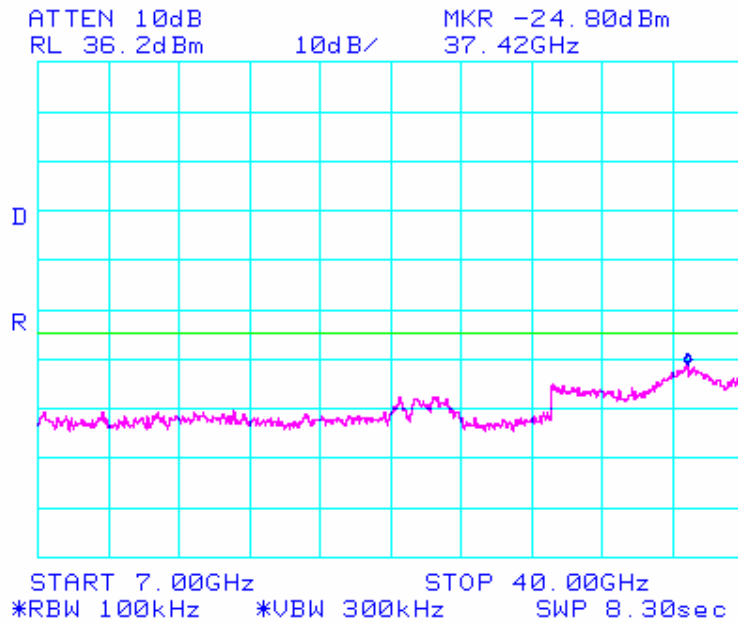

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 77 of 133

Specification

Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB

§15.247(d) and In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

§15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	± 2.37 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6. Radiated Emissions

5.1.6.1. Transmitter Radiated Spurious Emissions (above 1 GHz)


FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

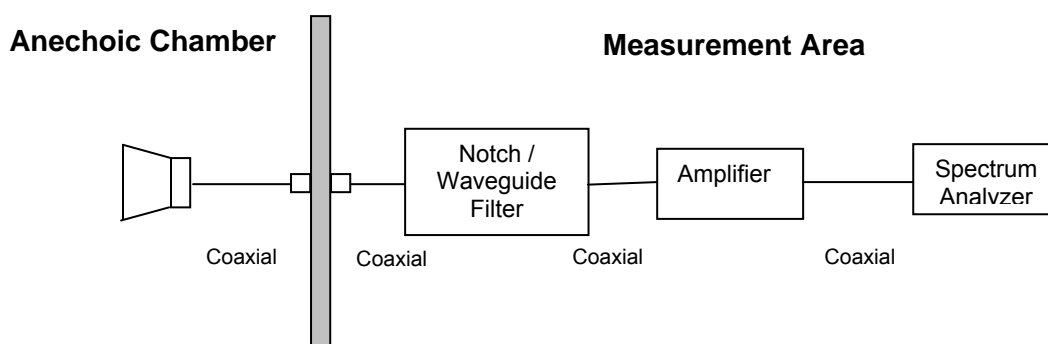

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 79 of 133

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

Ambient conditions.

Temperature: 17 to 23°C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 80 of 133

Radiated Spurious Emissions above 1 GHz


Test Setup - 802.11b – 1Mb/s

TABLE OF RESULTS – 802.11b, 1Mb/s Channel 1 (2,412 MHz) Integral Antenna
Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
7238.711	V	52.74	+0.7	53.44	74	-20.56

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
7238.711	V	44.82	+0.7	45.52	54	-8.48

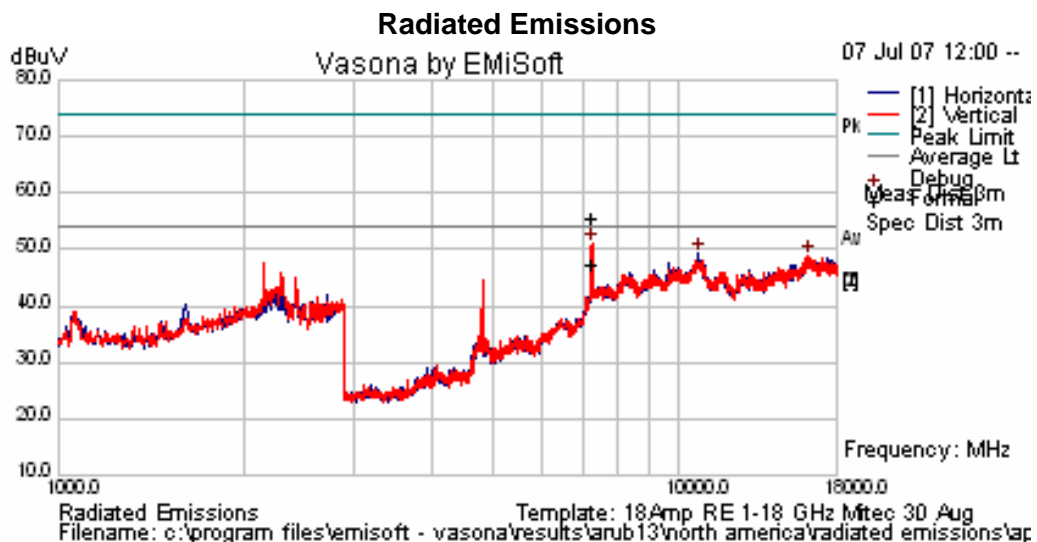

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 81 of 133

TABLE OF RESULTS – 802.11b, 1Mb/s Channel 6 (2,437) Integral Antenna
Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
7312.311	V	50.64	+0.75	51.39	74	-22.61

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
7312.311	V	38.73	+0.75	39.48	54	-14.52

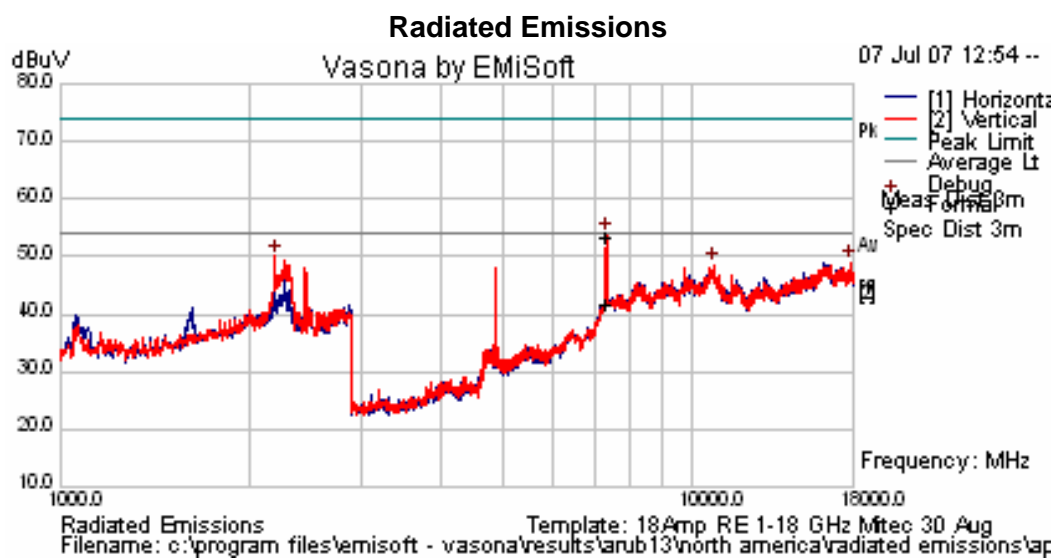

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 82 of 133

TABLE OF RESULTS – 802.11b, 1Mb/s Channel 11 (2,462 MHz) Integral Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
7386.521	V	51.35	+0.8	52.15	74	-21.85

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
7386.521	V	40.72	+0.8	41.52	54	-12.48

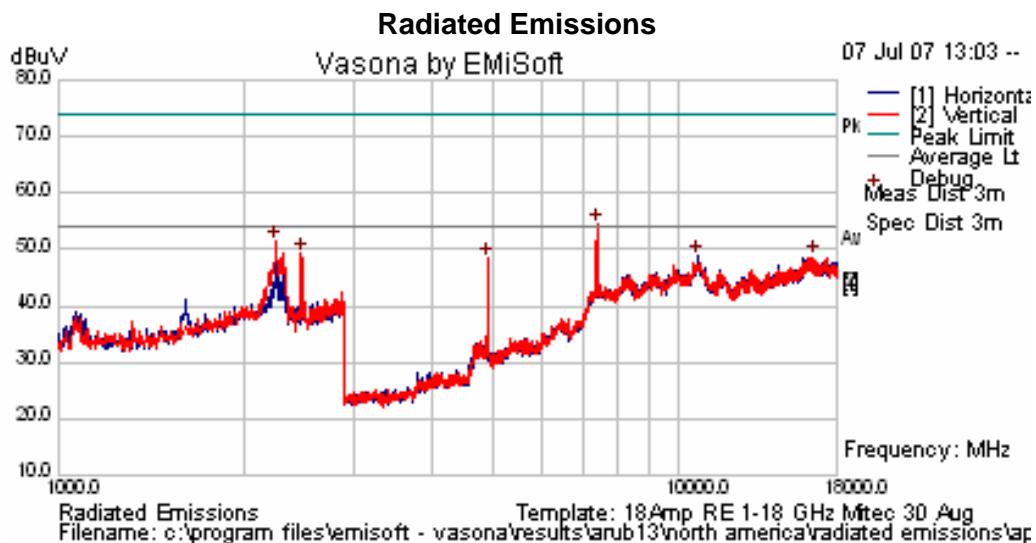

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 83 of 133

Test Setup - 802.11g – 6Mb/s


TABLE OF RESULTS – 802.11g, 6 Mb/s Channel 1 (2,412 MHz) Integral Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dBμV/m)

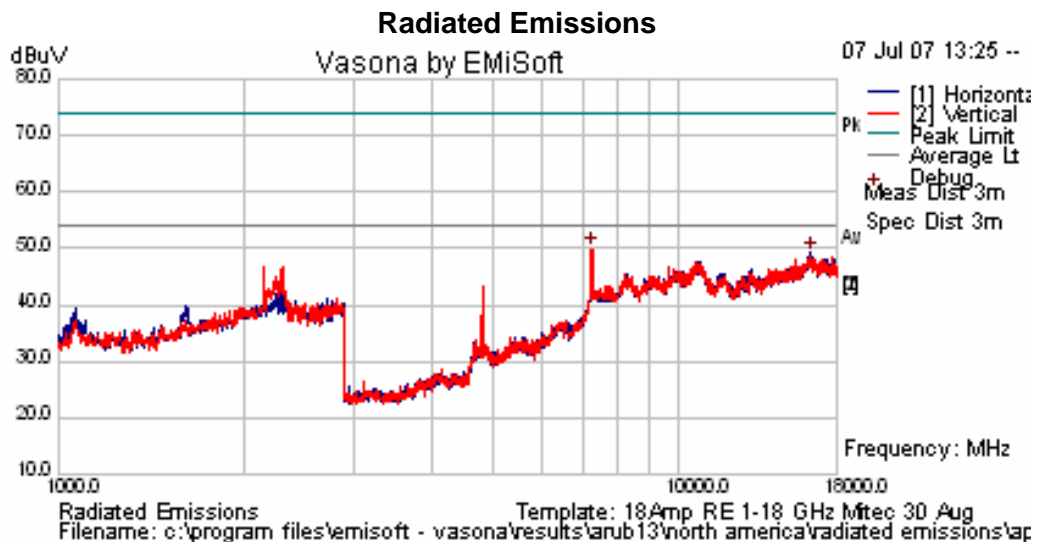

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 84 of 133


TABLE OF RESULTS – 802.11g, 6 Mb/s Channel 6 (2,437) Integral Antenna
Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

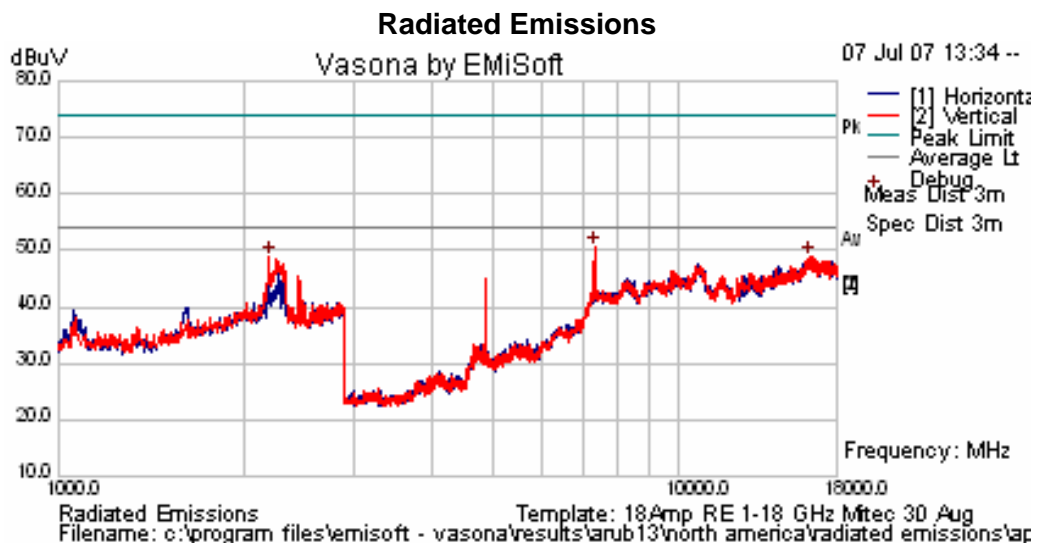

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 85 of 133


TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 11 (2,462 MHz) Integral Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

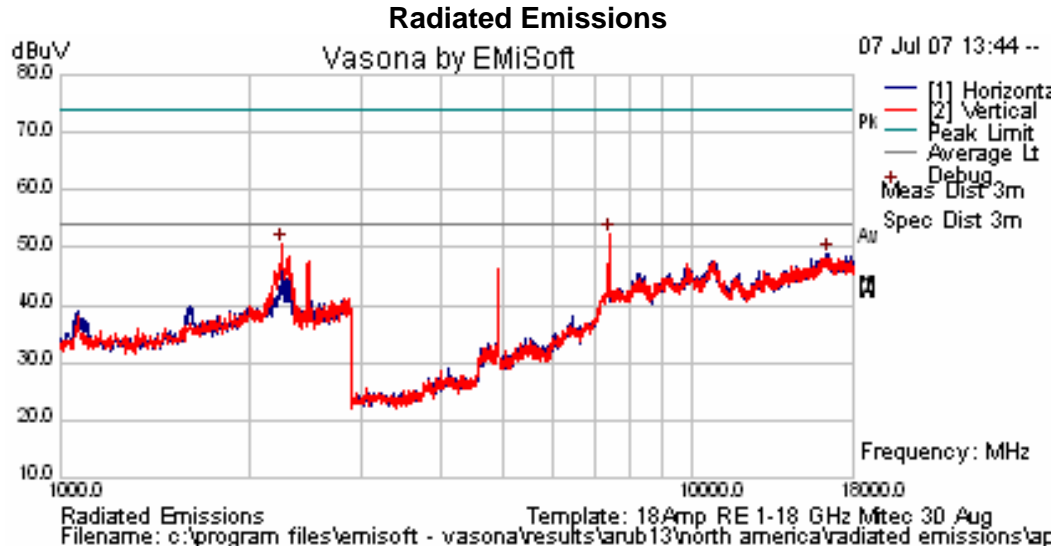

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 86 of 133

Test Setup - 802.11a – 6Mb/s


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 149 (5,745) Integral Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

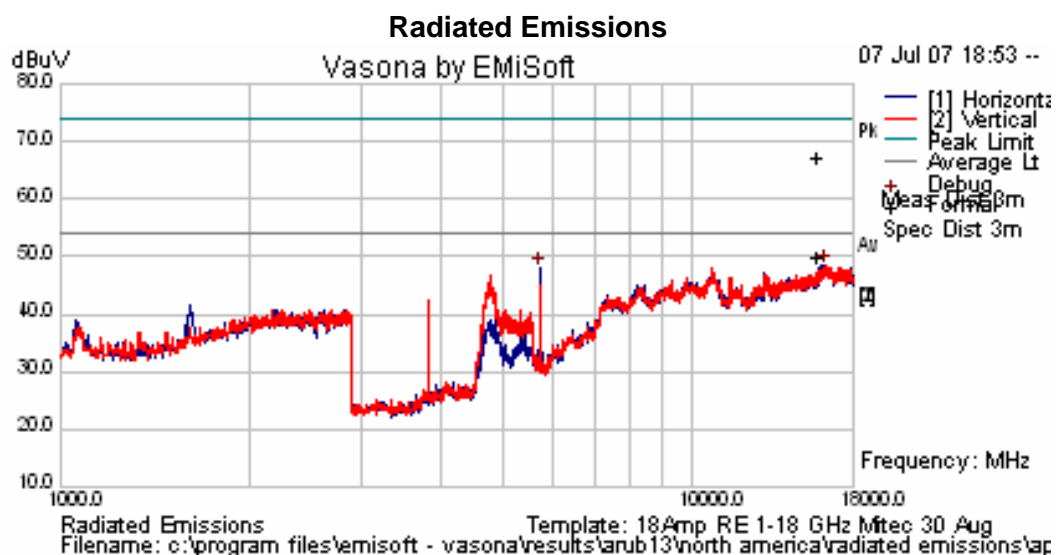

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 87 of 133


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 157 (5,785) Integral Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

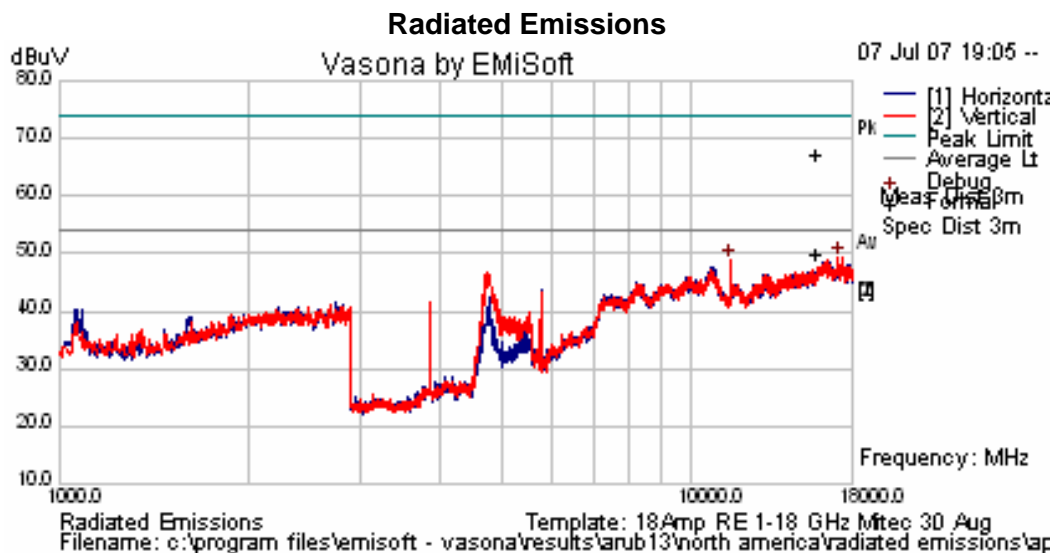

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 88 of 133


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 165 (5,825) Integral Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

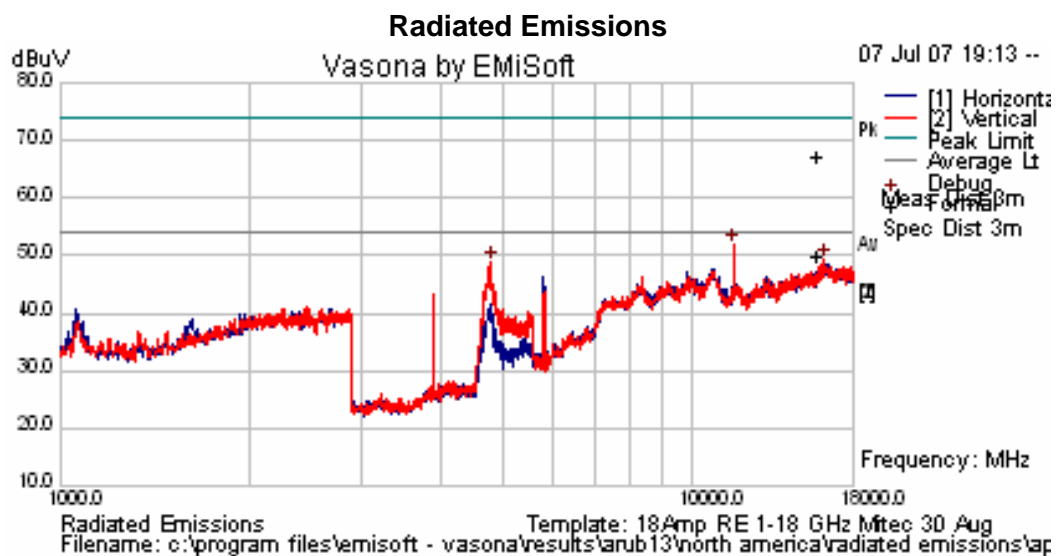

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 89 of 133

Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Test Setup - 802.11b – 1Mb/s


TABLE OF RESULTS – 802.11b – 1Mb/s Channel 1 (2,412 MHz) ANT-2, 6dBi Antenna
Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

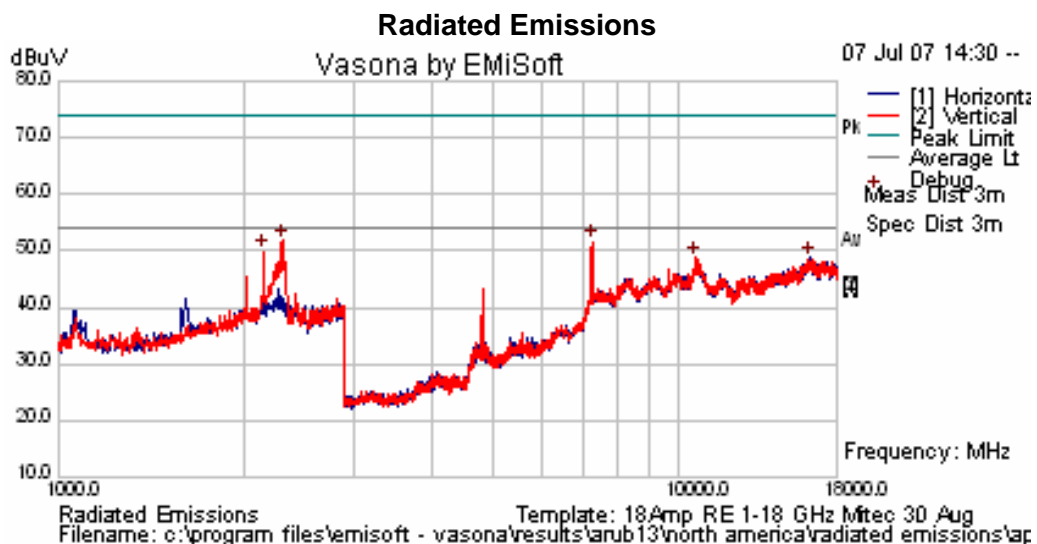

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 90 of 133


TABLE OF RESULTS – 802.11b – 1Mb/s Channel 6 (2,437) ANT-2, 6dBi Antenna
Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dBμV/m)

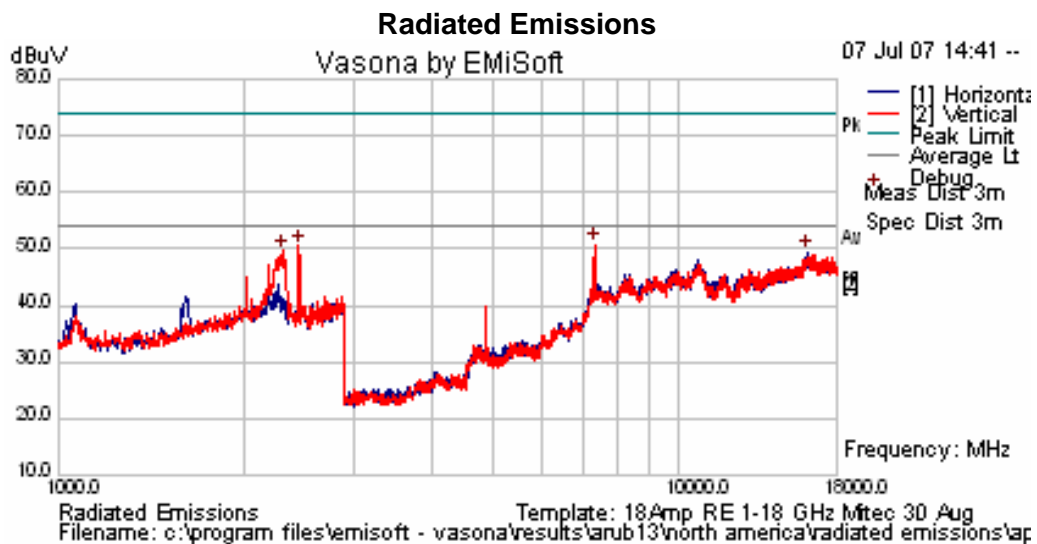

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 91 of 133

TABLE OF RESULTS – 802.11b – 1Mb/s Channel 11 (2,462 MHz) ANT-2, 6dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
7386.521	V	52.54	+0.8	53.34	74	-20.66

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
7386.521	V	41.72	+0.8	42.52	54	-11.48

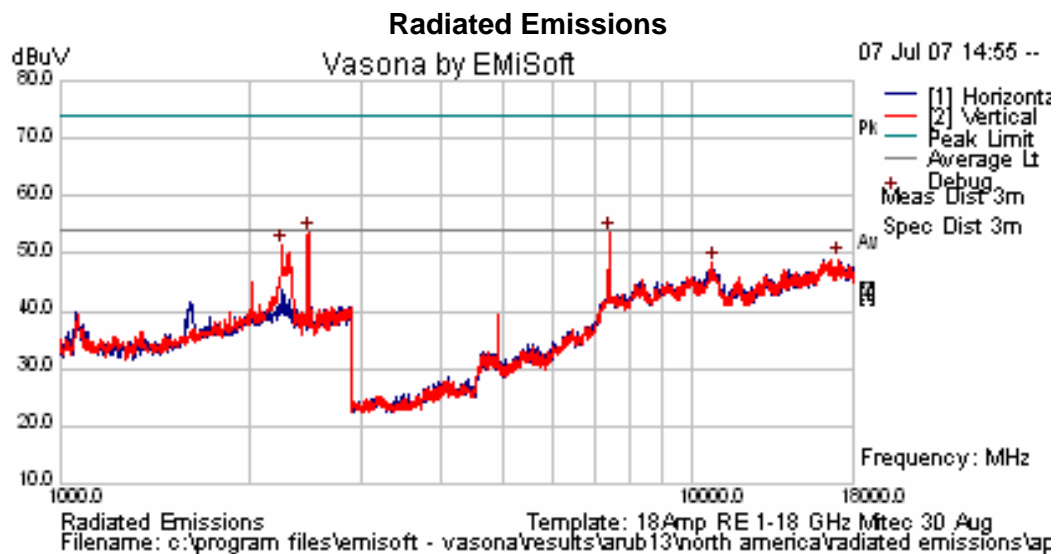

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 92 of 133

Test Setup - 802.11g – 6Mb/s


TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 1 (2,412 MHz) ANT-2, 6dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

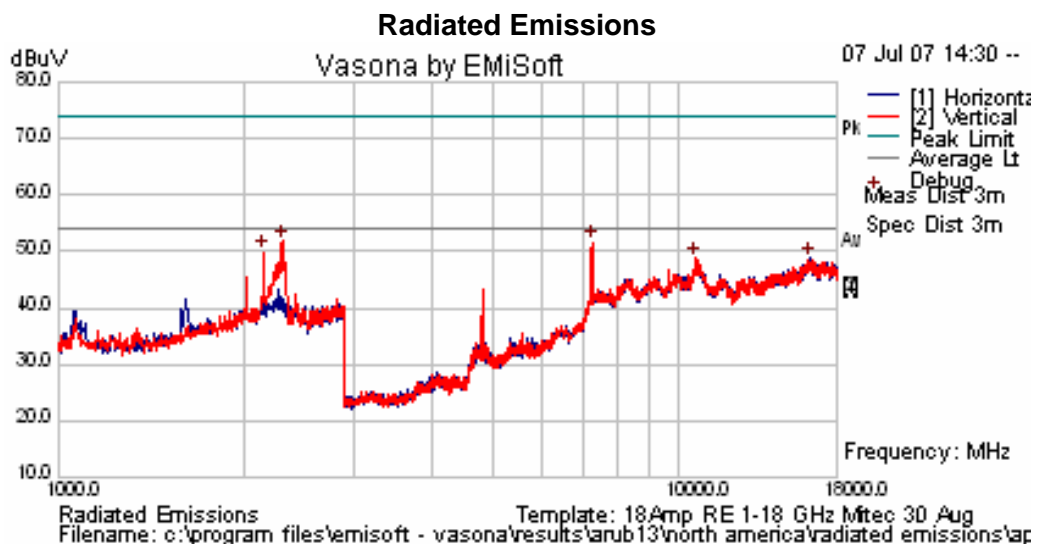

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 93 of 133


TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 6 (2,437) ANT-2, 6dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

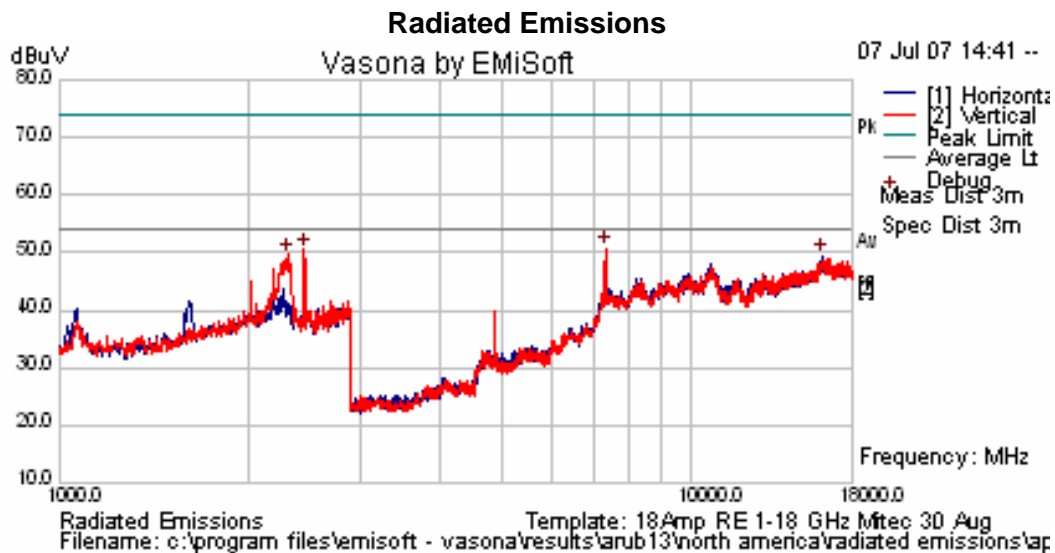

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 94 of 133

TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 11 (2,462 MHz) ANT-2, 6dBi Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
7386.521	V	52.87	+0.8	53.67	74	-20.33

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
7386.521	V	42.38	+0.8	43.18	54	-10.82

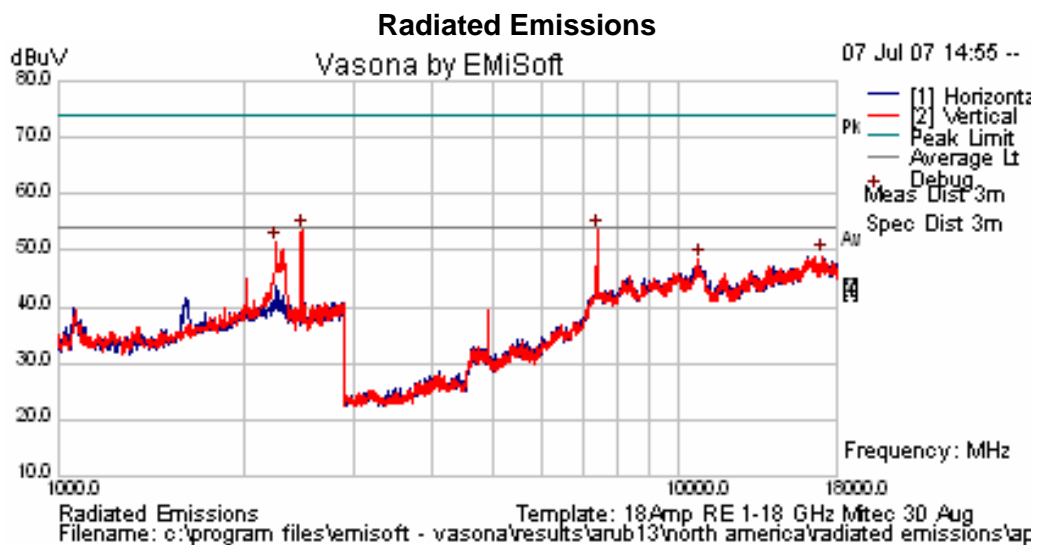

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 95 of 133

Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11b – 1Mb/s Channel 1 (2,412 MHz) ANT-7, 12dBi Antenna


Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

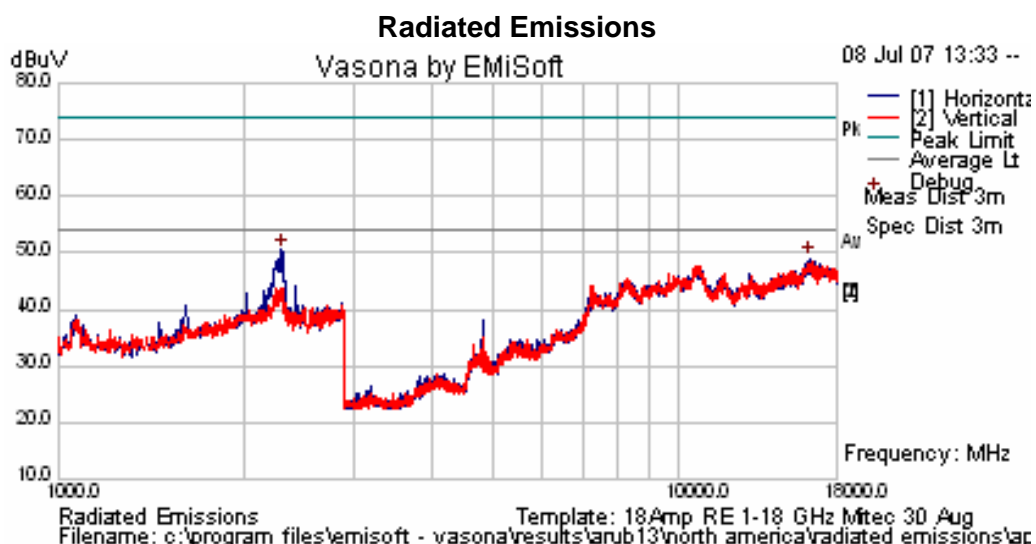

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 96 of 133


TABLE OF RESULTS – 802.11b – 1Mb/s Channel 6 (2,437) ANT-7, 12dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

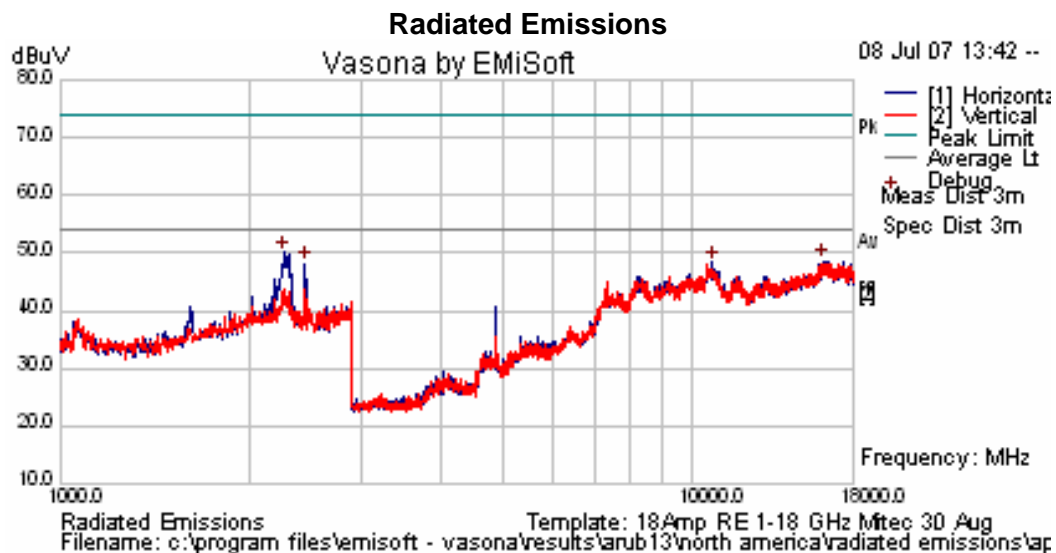

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 97 of 133


TABLE OF RESULTS – 802.11b – 1Mb/s Channel 11 (2,462 MHz) ANT-7, 12dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dBμV/m)

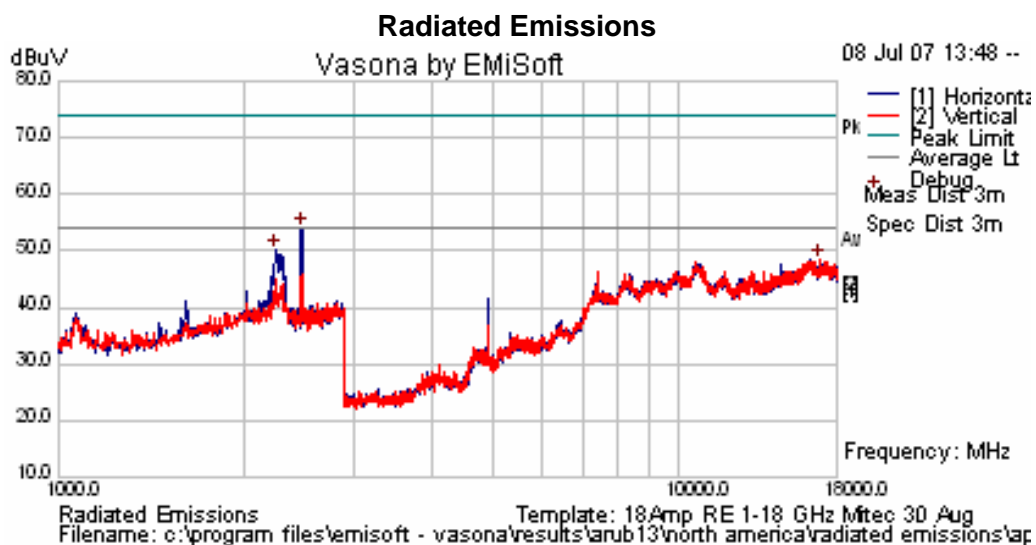

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 98 of 133

Test Setup - 802.11g – 6Mb/s


TABLE OF RESULTS – 802.11g, 6 Mb/s Channel 1 (2,412 MHz) ANT-7, 12dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Peak Limit (dBμV/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dBμV)	Correction Factor (dB)	Corrected Field Strength (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dBμV/m)

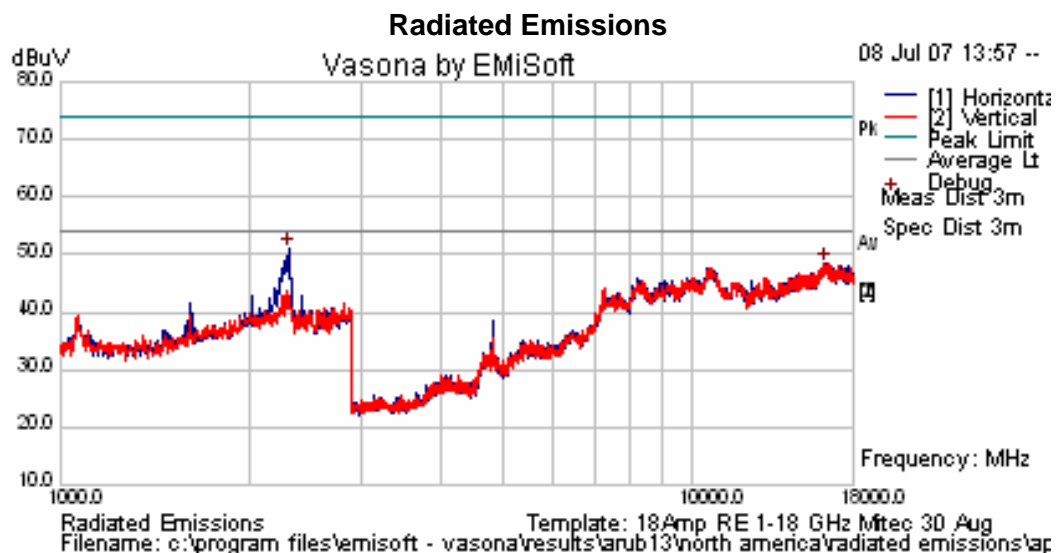

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 99 of 133


TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 6 (2,437) ANT-7, 12dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

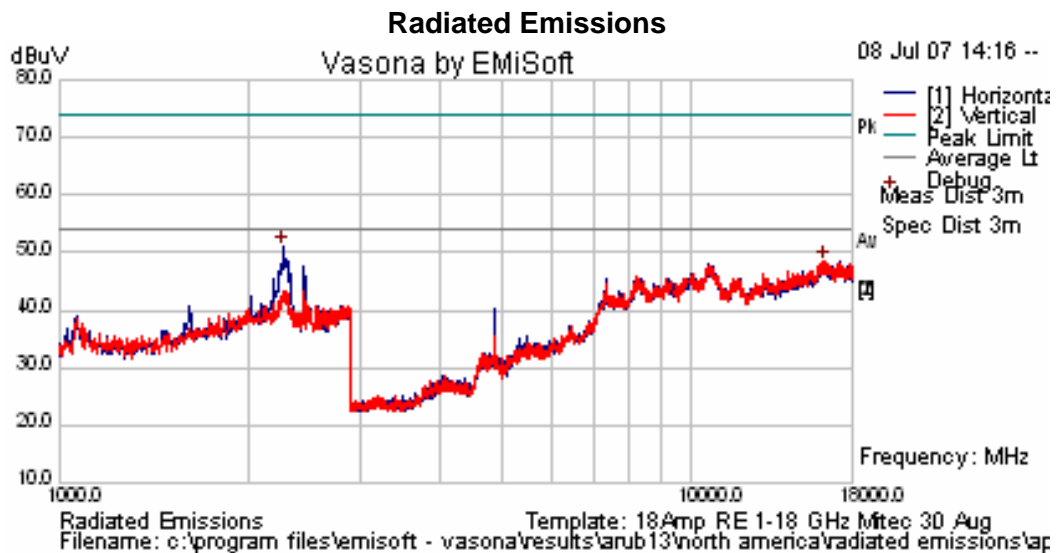

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 100 of 133


TABLE OF RESULTS – 802.11g – 6 Mb/s Channel 11 (2,462 MHz) ANT-7, 12dBi Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

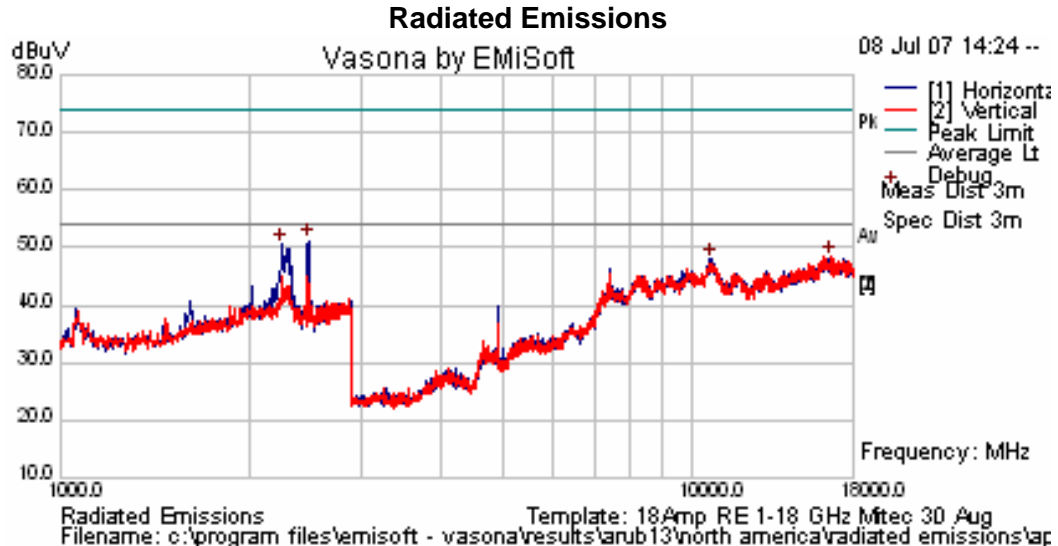

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 101 of 133

Test Setup - 802.11a – 6Mb/s


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 149 (5,745) ANT-10, 6dBi Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

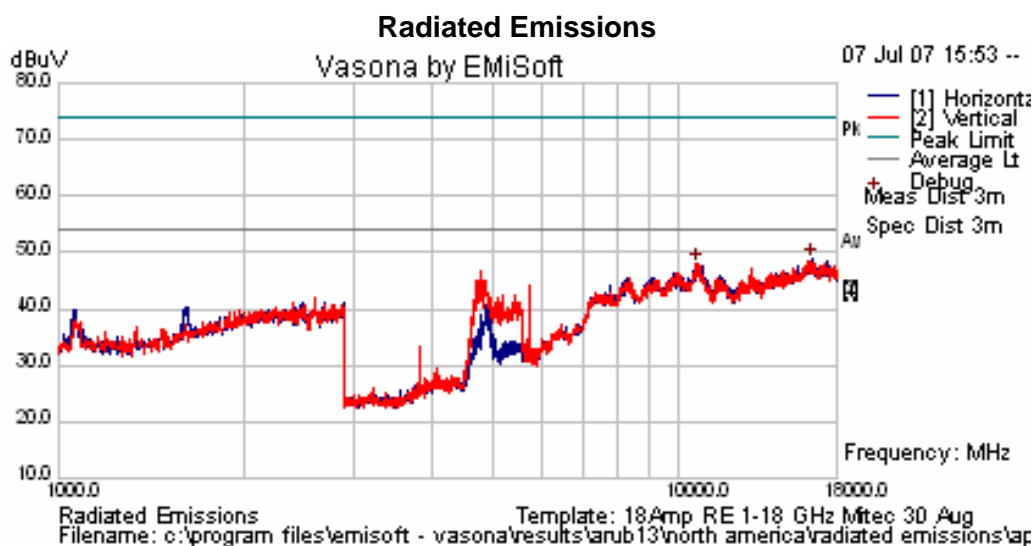

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 102 of 133


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 157 (5,785) ANT-10, 6dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

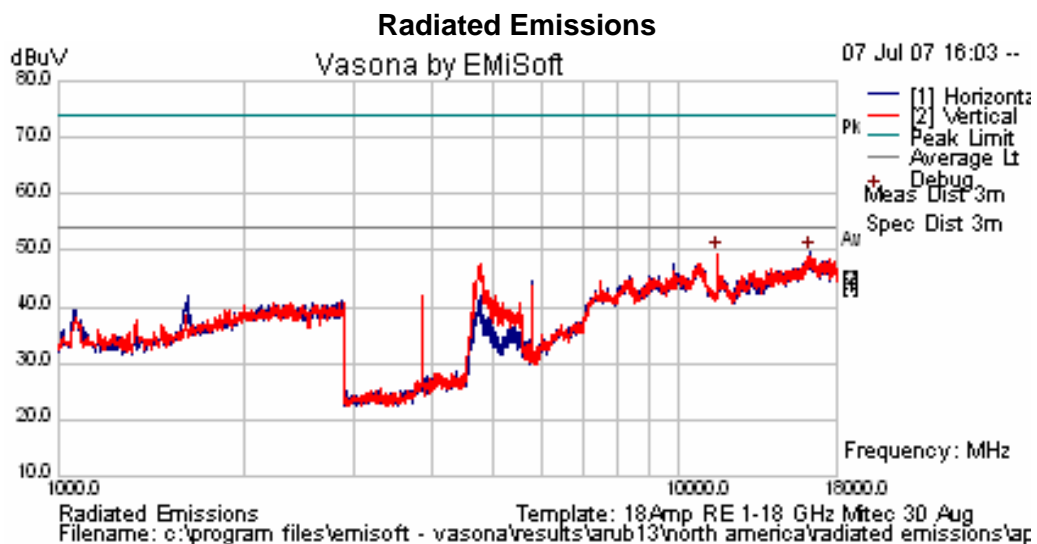

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 103 of 133


TABLE OF RESULTS – 802.11a – 6 Mb/s Channel 165 (5,825) ANT-10, 6dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
					74	
					74	

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
					54	
					54	

All peak emissions were found to be below the average limit (54 dB μ V/m)

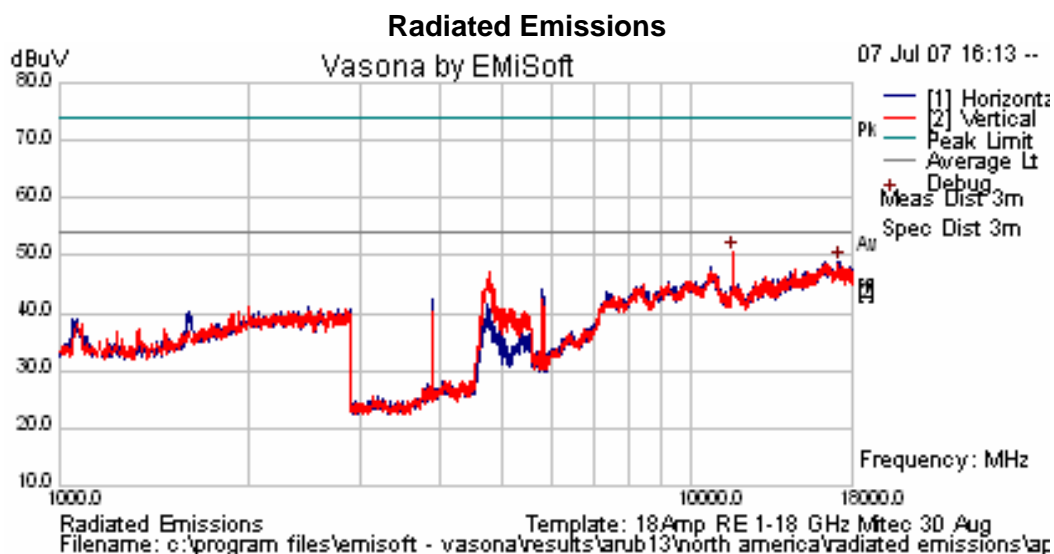

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 104 of 133


Test Setup - 802.11a - 6Mb/s

TABLE OF RESULTS – 802.11a, 6 Mb/s Channel 149 (5,745) ANT-12, 14dBi Antenna, Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
4808.103	V	59.38	-4.81	54.57	74	-19.43

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
4808.103	V	46.15	-4.81	41.34	54	-12.66

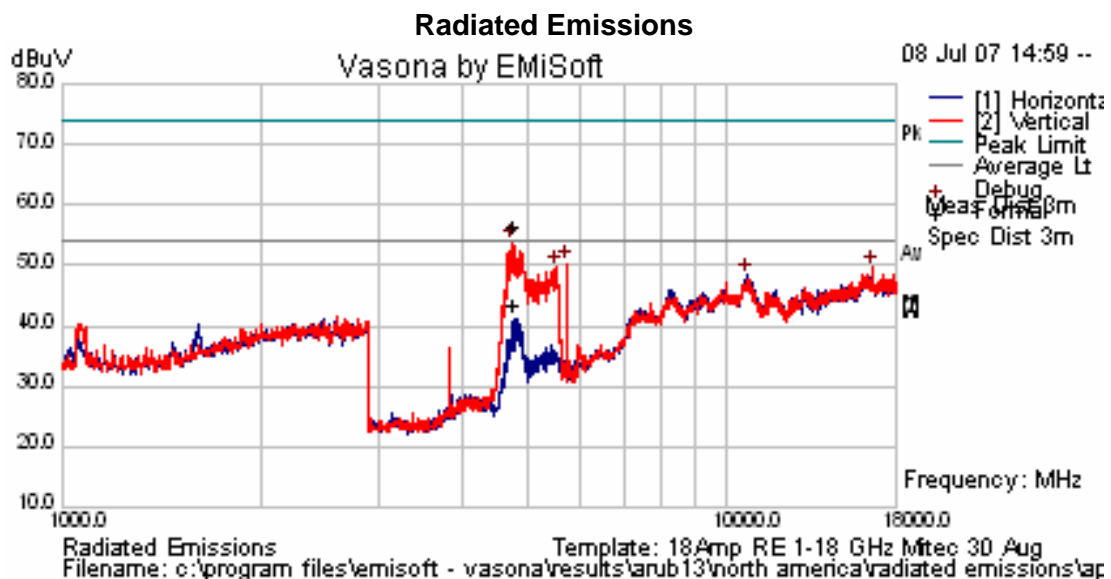

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 105 of 133

TABLE OF RESULTS – 802.11a, 6 Mb/s Channel 157 (5,785) ANT-12, 14dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
11566.74	V	45.94	+5.61	51.55	74	-22.45

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
11566.74	V	32.68	+5.61	38.29	54	-15.71

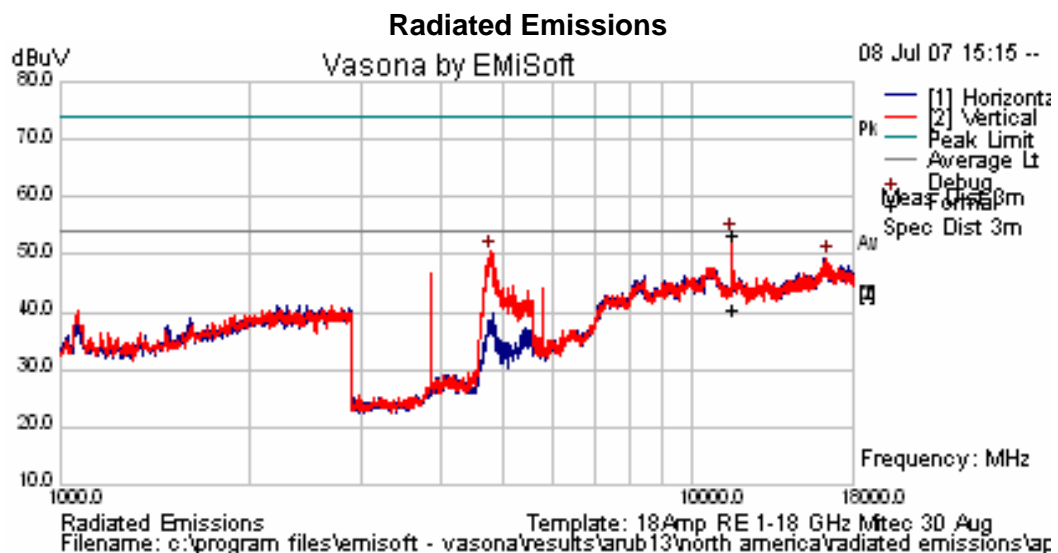

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 106 of 133

TABLE OF RESULTS – 802.11a, 6 Mb/s Channel 165 (5,825) ANT-12, 14dBi Antenna Peak

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Peak Limit (dB μ V/m)	Margin (dB)
11651.18	V	48.41	+5.78	54.19	74	-19.81

Average

Freq. (MHz)	Pol. (H/V)	Raw Reading (dB μ V)	Correction Factor (dB)	Corrected Field Strength (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)
11651.18	V	34.41	+5.78	40.19	54	-13.81

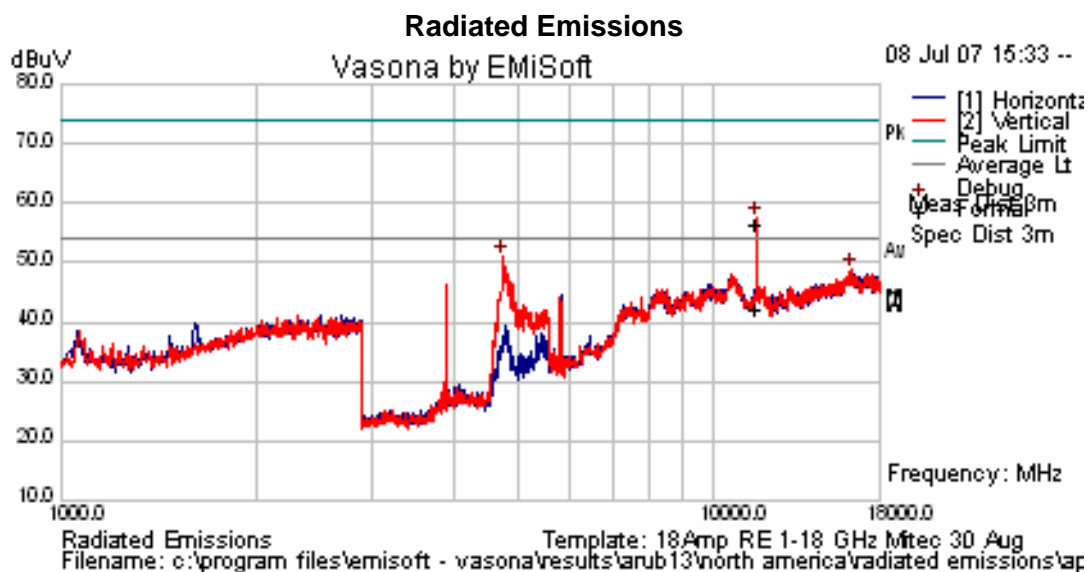

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.6.2. Radiated Band Edge Measurements – Restricted Bands

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. The highest emissions relative to the limit are listed for each frequency scanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

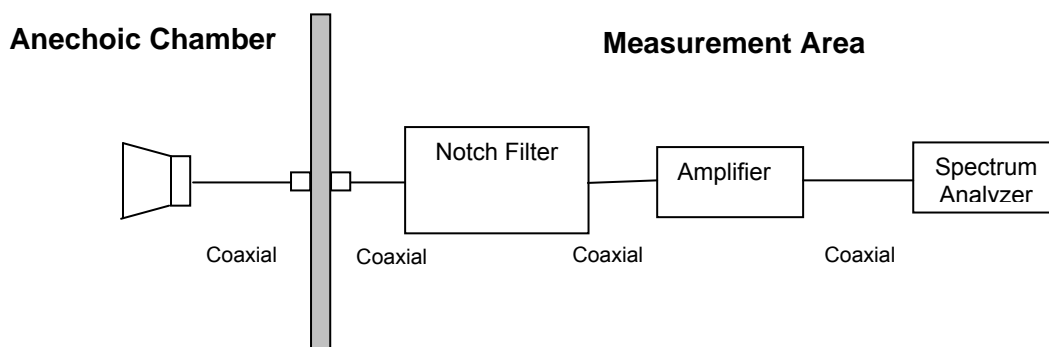

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Band-stop Filter Loss or Waveguide Loss



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 108 of 133

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (}\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 109 of 133

Band Edge - Restricted Bands Test Results

TABLE OF RESULTS – 802.11b Integral Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	62.34	74	-11.66
1	2,412 _{AVE}	2,390	49.70	54	-4.30

TABLE OF RESULTS – 802.11b Integral Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	68.34	74	-5.66
11	2,462 _{AVE}	2,483.5	50.14	54	-3.86

TABLE OF RESULTS – 802.11g Integral Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	64.35	74	-9.65
1	2,412 _{AVE}	2,390	47.31	54	-6.69

TABLE OF RESULTS – 802.11g Integral Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	65.58	74	-8.42
11	2,462 _{AVE}	2,483.5	47.25	54	-6.75

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 110 of 133

Band Edge - Restricted Bands Test Results

TABLE OF RESULTS – 802.11b ANT-2, 6 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	62.88	74	-11.12
1	2,412 _{Ave}	2,390	50.19	54	-3.81

TABLE OF RESULTS – 802.11b ANT-2, 6 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	59.21	74	-14.79
11	2,462 _{Ave}	2,483.5	46.35	54	-7.65

ANT-2, 2 dBi

TABLE OF RESULTS – 802.11g ANT-2, 6 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	72.12	74	-1.88
1	2,412 _{Ave}	2,390	52.28	54	-1.72

TABLE OF RESULTS – 802.11g ANT-2, 6 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	73.52	74	-0.48
11	2,462 _{Ave}	2,483.5	51.37	54	-2.63

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 111 of 133

Band Edge - Restricted Bands Test Results

TABLE OF RESULTS – 802.11b ANT-7, 12 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	73.30	74	-0.70
1	2,412 _{AVE}	2,390	50.62	54	-3.38

TABLE OF RESULTS – 802.11b ANT-7, 12 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	62.90	74	-11.10
11	2,462 _{AVE}	2,483.5	50.31	54	-3.69

TABLE OF RESULTS – 802.11g ANT-7, 12 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2,412 _{PEAK}	2,390	68.94	74	-5.06
1	2,412 _{AVE}	2,390	51.12	54	-2.88

TABLE OF RESULTS – 802.11g ANT-7, 12 dBi Antenna

Ch #	Tx Freq. (MHz)	Restricted Band Edge Frequency (MHz)	Measured (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11	2,462 _{PEAK}	2,483.5	66.16	74	-7.84
11	2,462 _{AVE}	2,483.5	48.68	54	-5.32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 112 of 133

Band Edge - Restricted Bands Test Results


RESULTS– 802.11b Integral Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

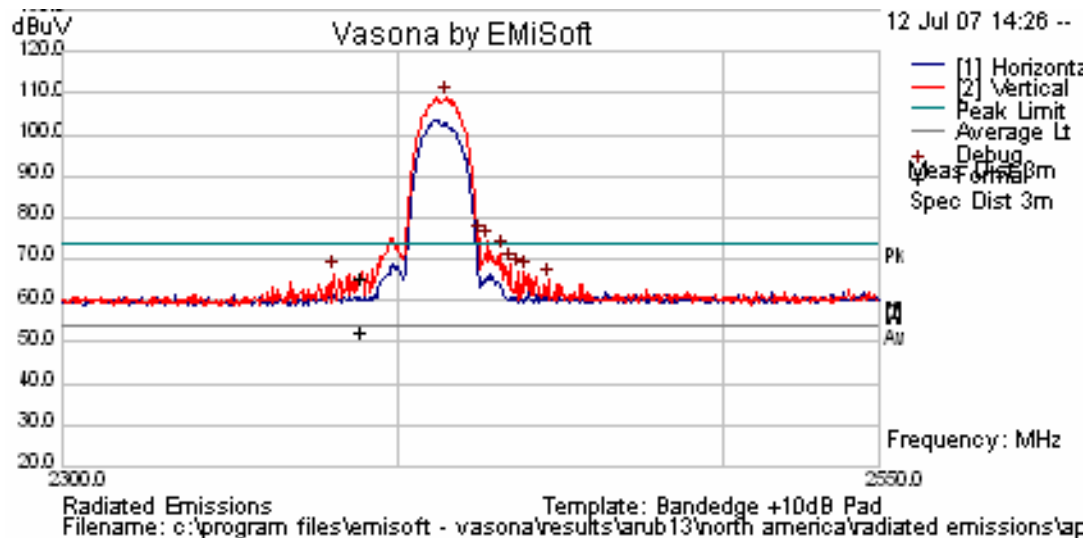

RESULTS – 802.11b Integral Antenna

Channel 11 (2,462 MHz) – Upper Band Edge

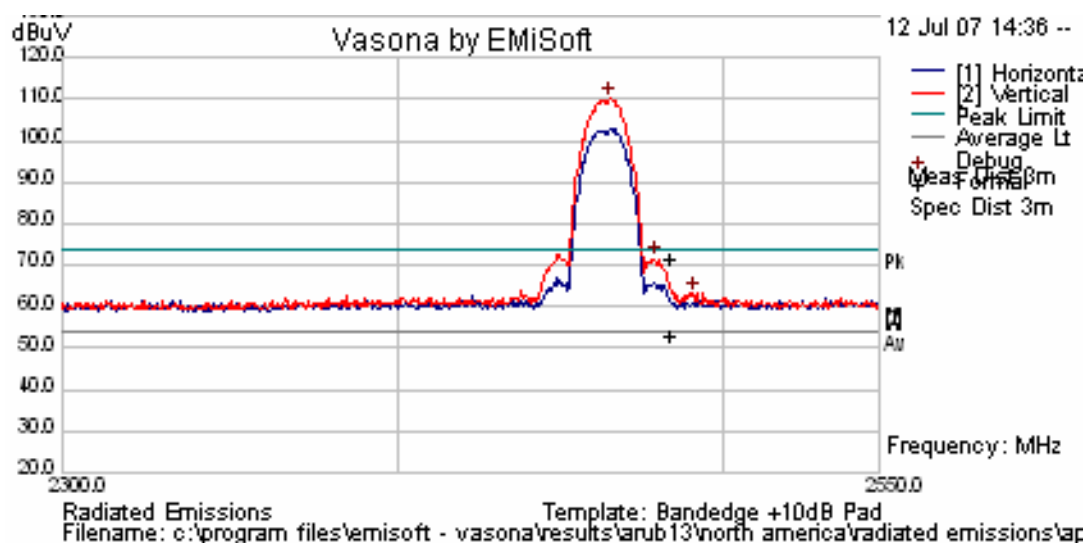


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 113 of 133


RESULTS – 802.11g Integral Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

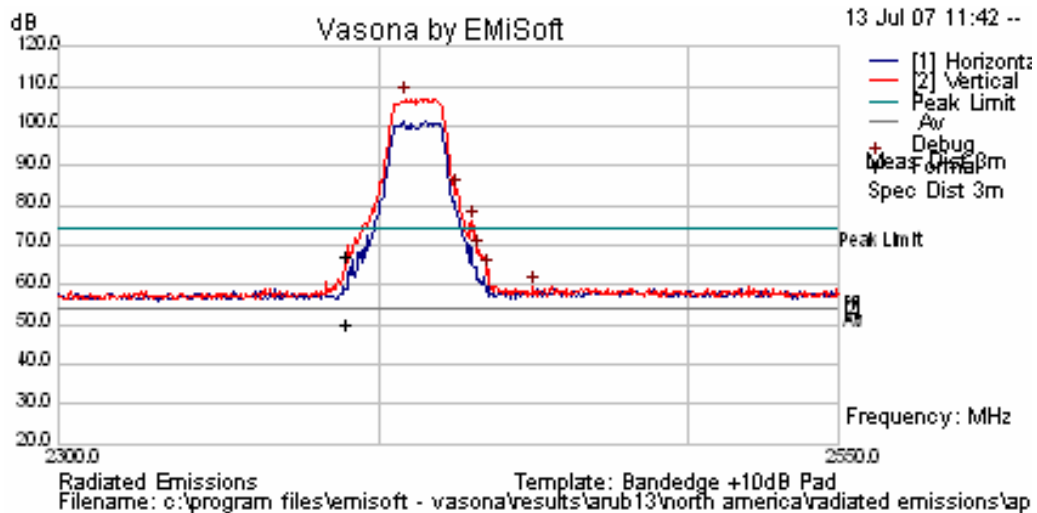

RESULTS – 802.11g Integral Antenna


Channel 11 (2,462 MHz) – Upper Band Edge

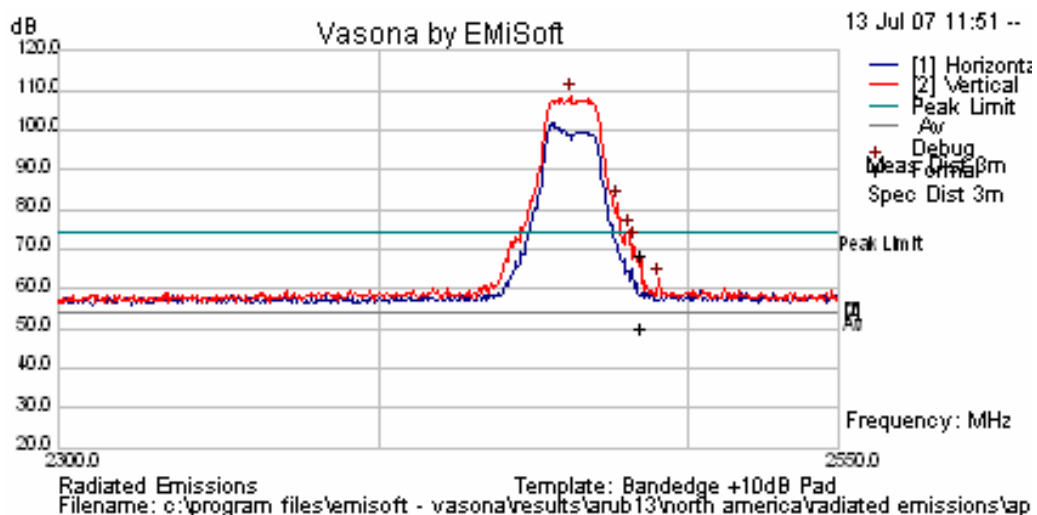

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


RESULTS – 802.11b ANT-2, 6 dBi Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

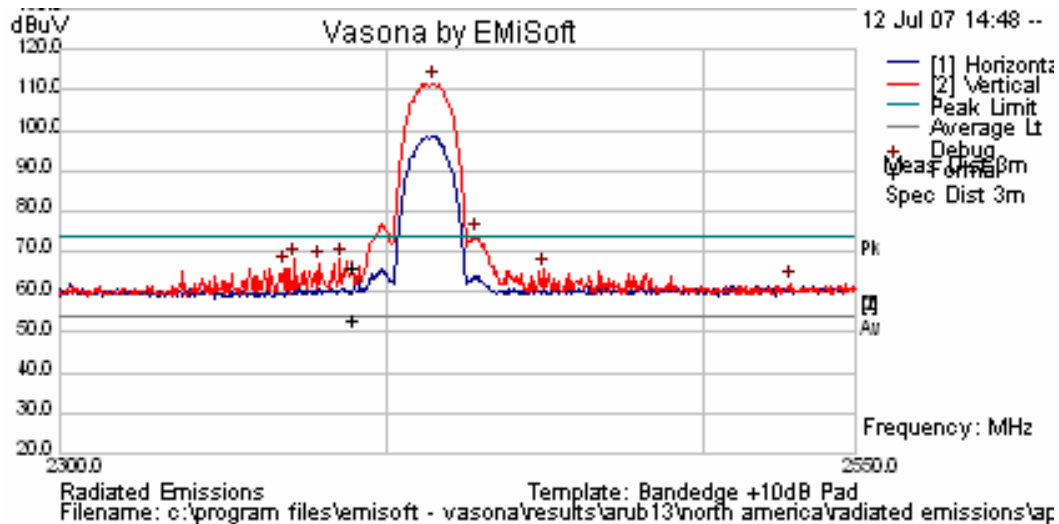

RESULTS – 802.11b ANT-2, 6 dBi Antenna

Channel 11 (2,462 MHz) – Upper Band Edge

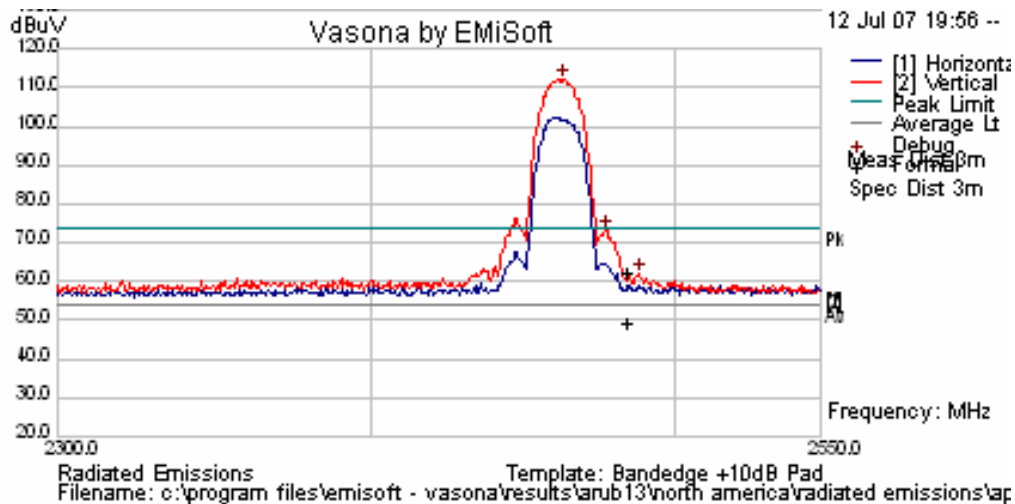




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 115 of 133


RESULTS – 802.11g ANT-2, 6 dBi Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

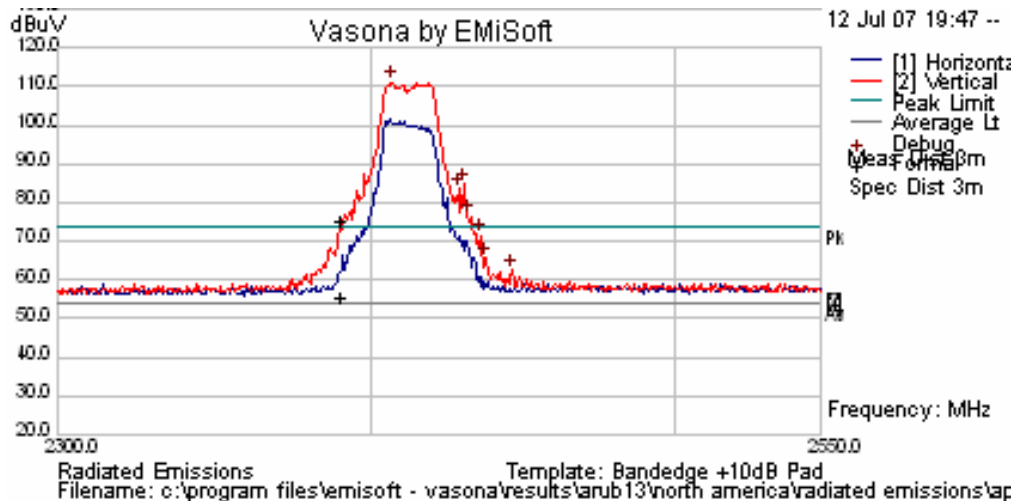

RESULTS – 802.11g ANT-2, 6 dBi Antenna

Channel 11 (2,462 MHz) – Upper Band Edge

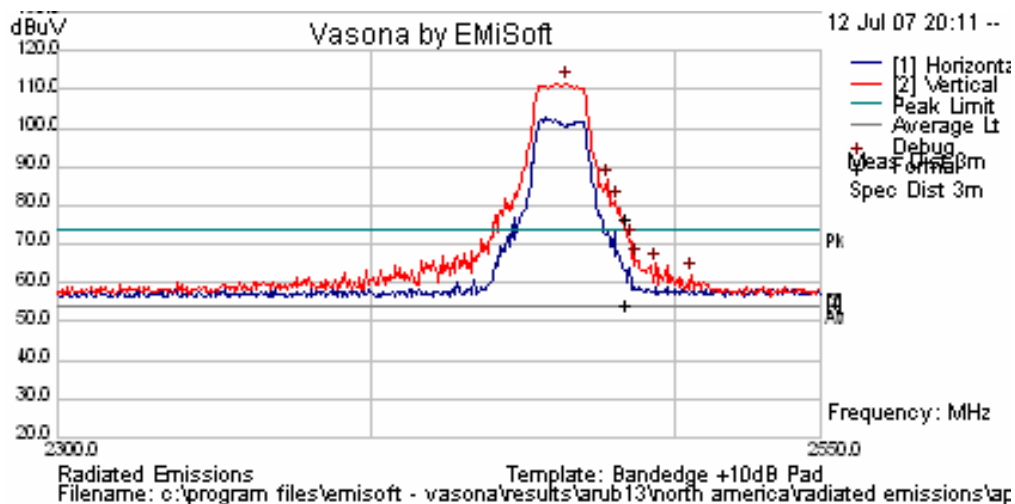


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 116 of 133


RESULTS – 802.11b ANT-7, 12 dBi Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

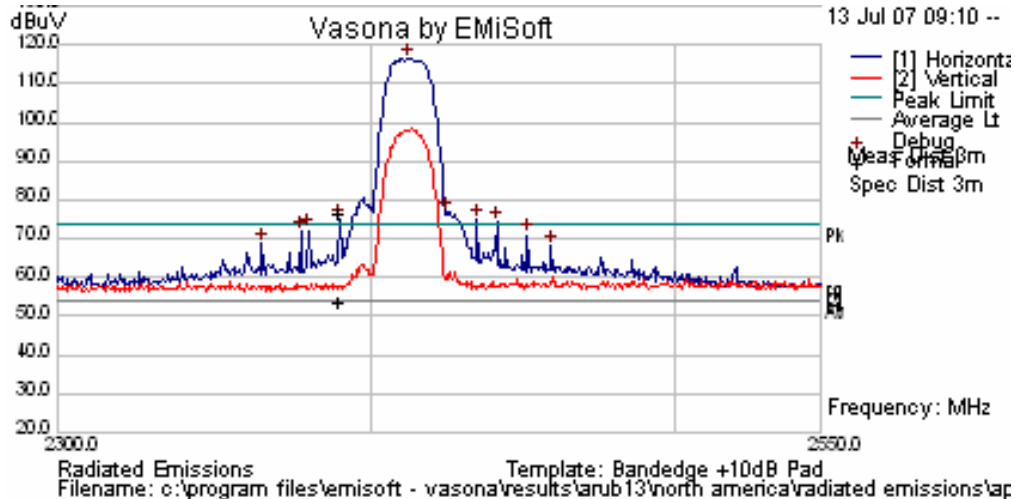

RESULTS – 802.11b ANT-7, 12 dBi Antenna

Channel 11 (2,462 MHz) – Upper Band Edge

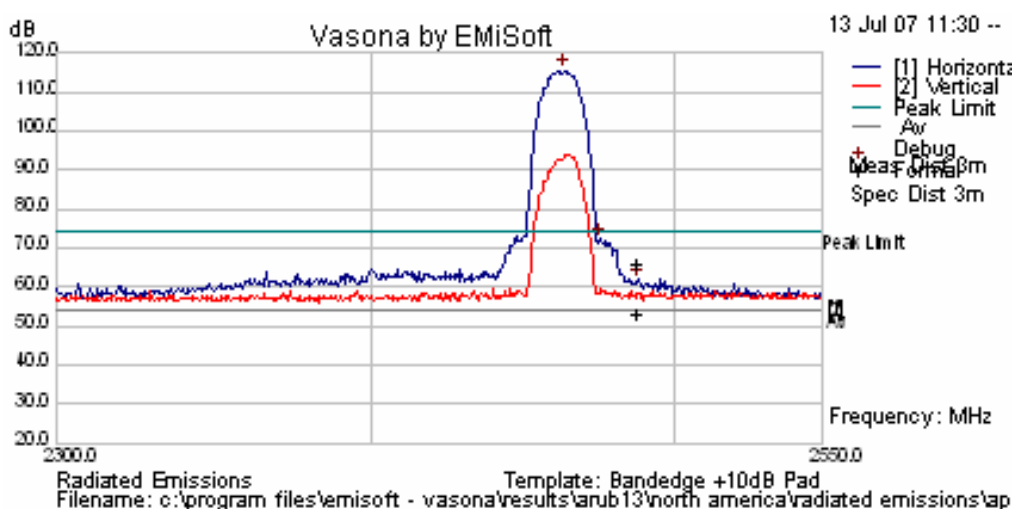


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 117 of 133


RESULTS – 802.11g ANT-7, 12 dBi Antenna

Channel 1 (2,412 MHz) - Lower Band Edge

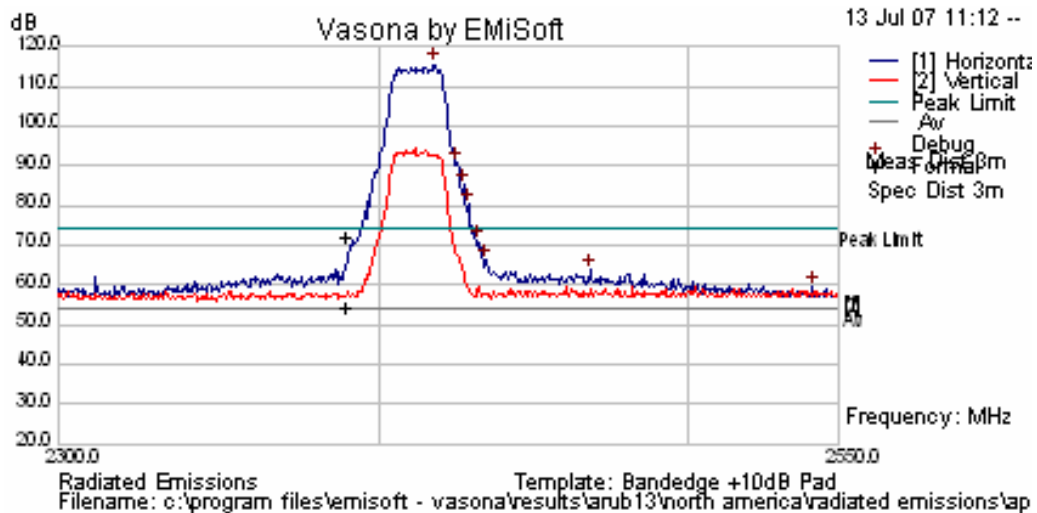

RESULTS – 802.11g ANT-7, 12 dBi Antenna

Channel 11 (2,462 MHz) – Upper Band Edge

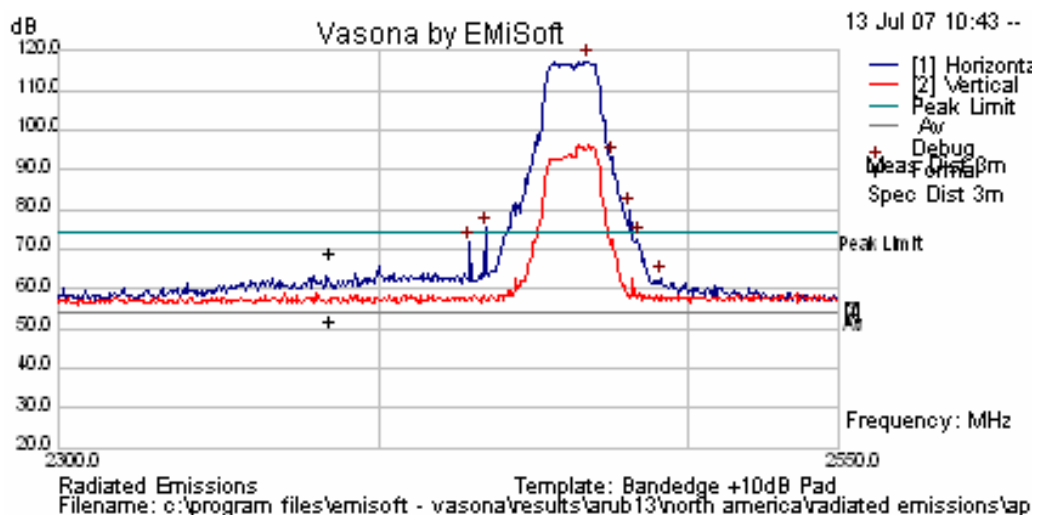

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 118 of 133

Specification Limits

FCC §15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 119 of 133

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.6.3. Radiated Spurious Emissions (30M-1 GHz)


FCC, Part 15 Subpart C §15.205/ §15.209

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Test Measurement Set up

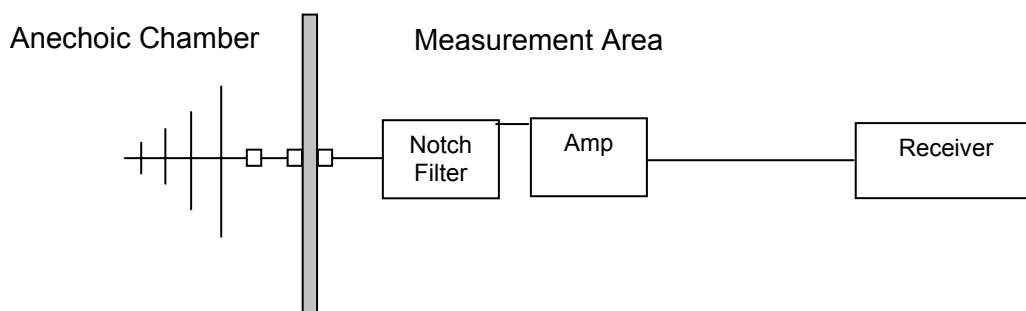

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

where:

$$FS = R + AF + CORR$$

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 121 of 133

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Transmitter operation: 802.11b

Data Rate(s): 1 Mb/s

Frequency: 2437 MHz

Power Level: Maximum

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 122 of 133

TABLE OF RESULTS

Test Configuration - POE Converter, External Antennas Connected

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
43.502	40.95	34.39	40	-5.61	216	114	V
53.859	40.88	34.93	40	-5.07	179	110	V
500.027	36.32	38.36	46	-7.64	140	107	V

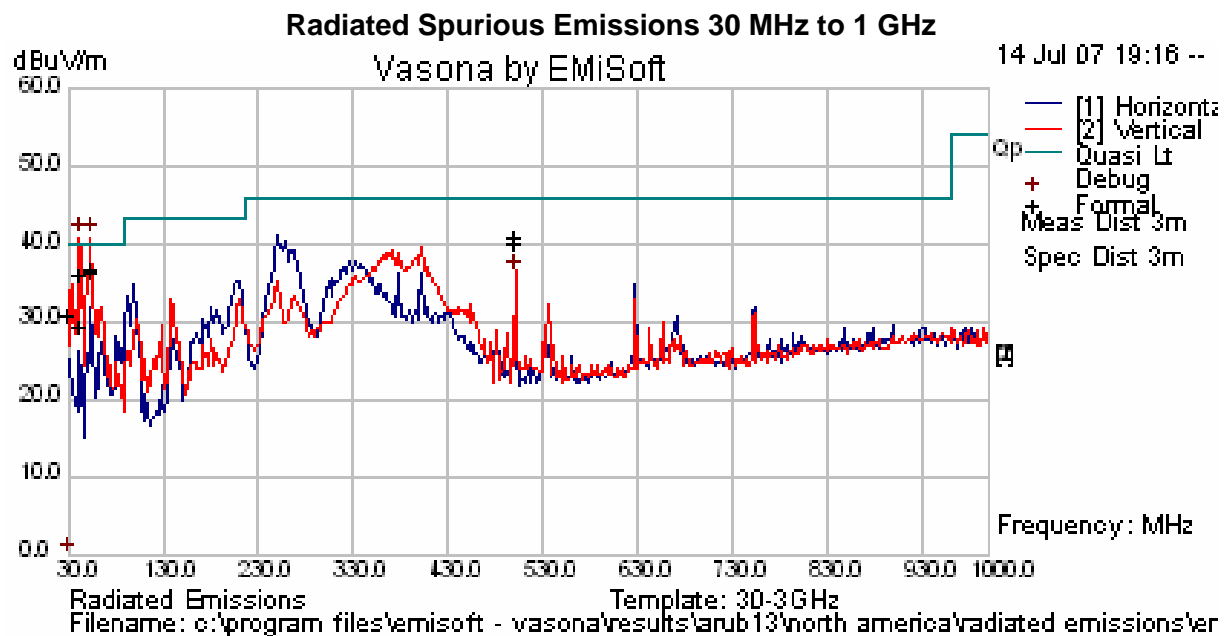

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 123 of 133

TABLE OF RESULTS

Test Configuration - ac/dc Converter, Integral Antennas

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity
500.04	38.92	36.63	46	-9.37	292	100	V
375.013	37.84	36.74	46	-9.26	59	101	H
50.444	32.92	31.11	40	-8.89	174	100	V

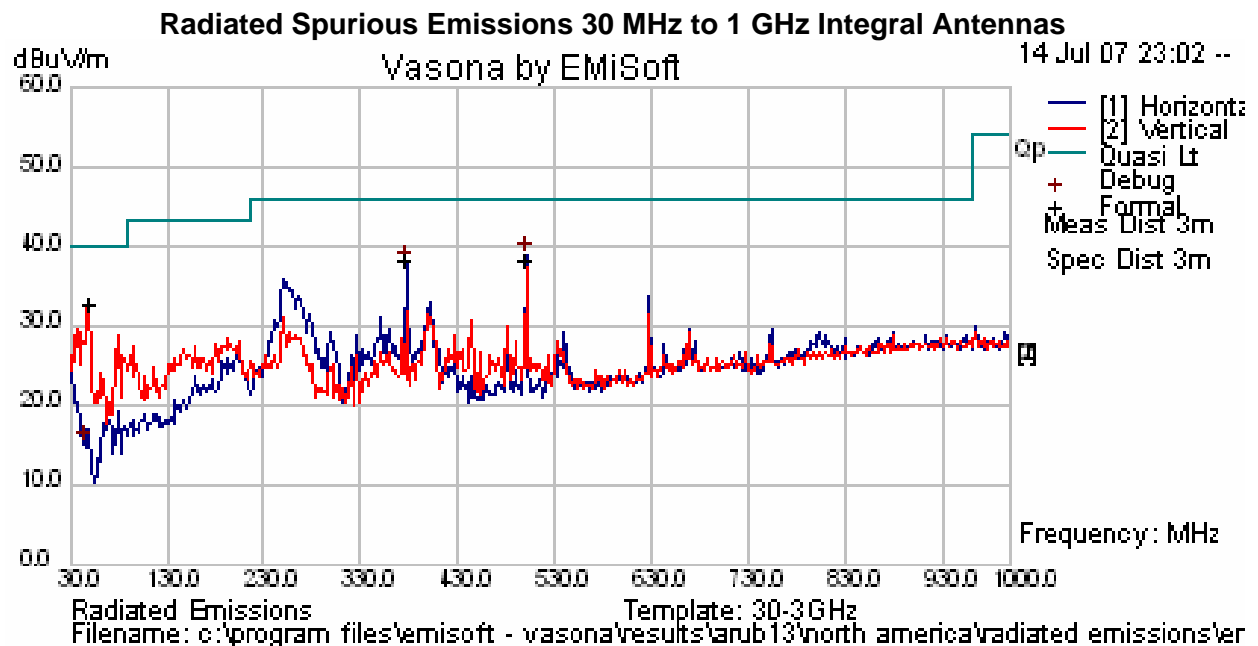

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 124 of 133

TABLE OF RESULTS

Test Configuration - ac/dc Converter, External Antennas Connected

Freq. (MHz)	Peak (dBuV/m)	QP (dBuV/m)	QP Lmt (dBuV/m)	QP Margin (dB)	Angle (deg)	Height (cm)	Polarity

There were no emissions within 6 dB of the limit line therefore no further detailed investigation was required.

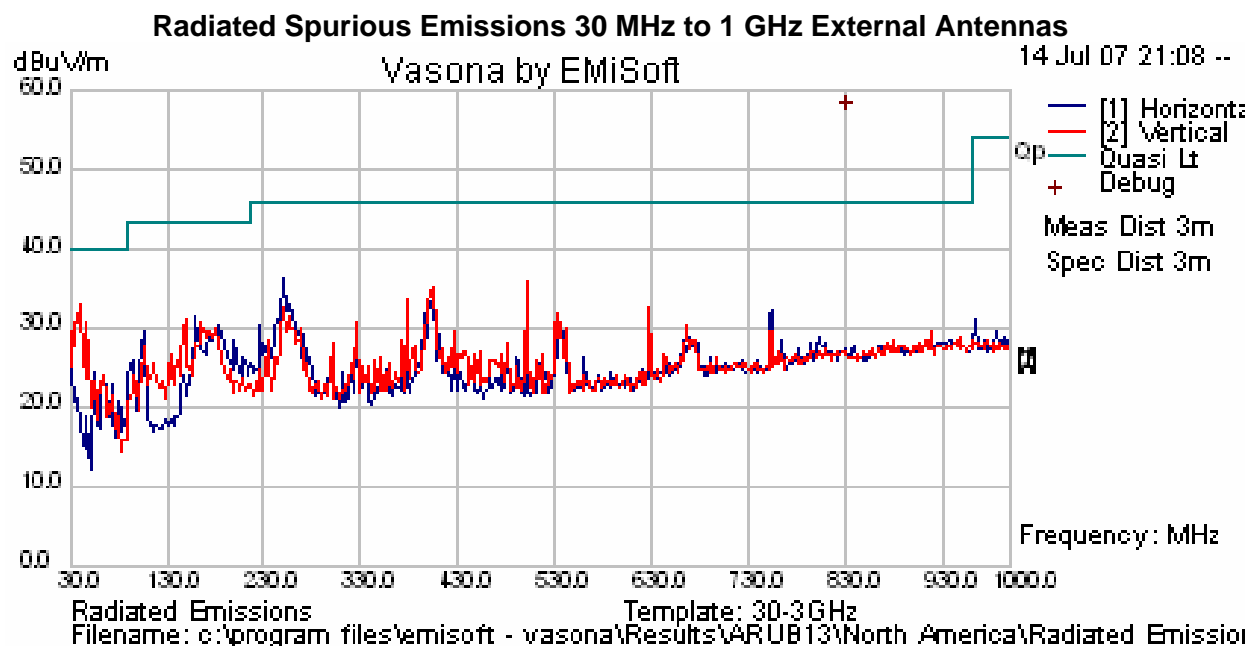

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 125 of 133

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

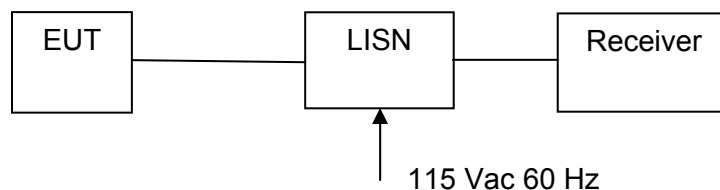

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar




Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 127 of 133

TABLE OF RESULTS –

Freq (MHz)	Line	Peak (dB μ V)	QP (dB μ V)	QP Limit (dB μ V)	QP Margin (dB)	Ave. (dB μ V)	Ave. Limit (dB μ V)	Ave. Margin (dB)
0.150	Line	52.17	48.93	66	-17.07	38.88	56.00	-17.12
0.165	Line	43.57	37.84	65.21	-27.36	20.09	55.21	-35.12
0.221	Line	37.87	37.02	62.78	-25.76	16.11	52.78	-36.67
0.346	Line	36.72	30.32	59.06	-28.74	23.49	49.06	-25.57
11.804	Line	32.58	34.72	60	-25.28	30.23	50.00	-19.77
21.260	Line	32.21	37.24	60	-22.76	31.15	50.00	-18.85

AC Wireline Conducted Emissions –150 kHz – 30 MHz)

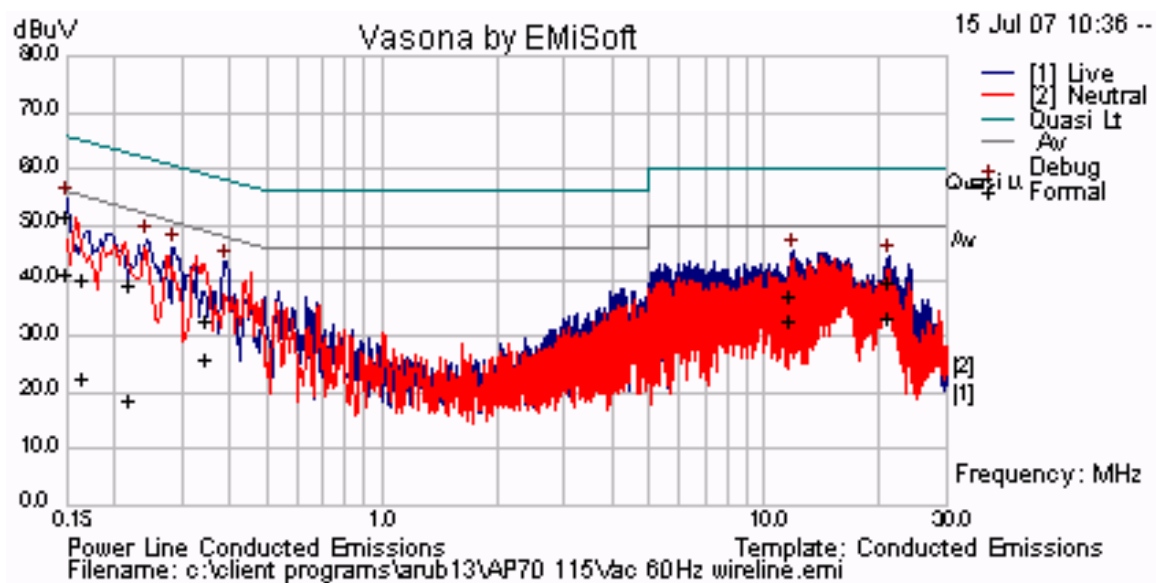

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 128 of 133

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

§15.207 (a) Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0193, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. PHOTOGRAPHS

6.1. Radiated Spurious Emissions



All ports had appropriate cables connected

6.2. AC Wireline Emissions (150 kHz - 30 MHz)

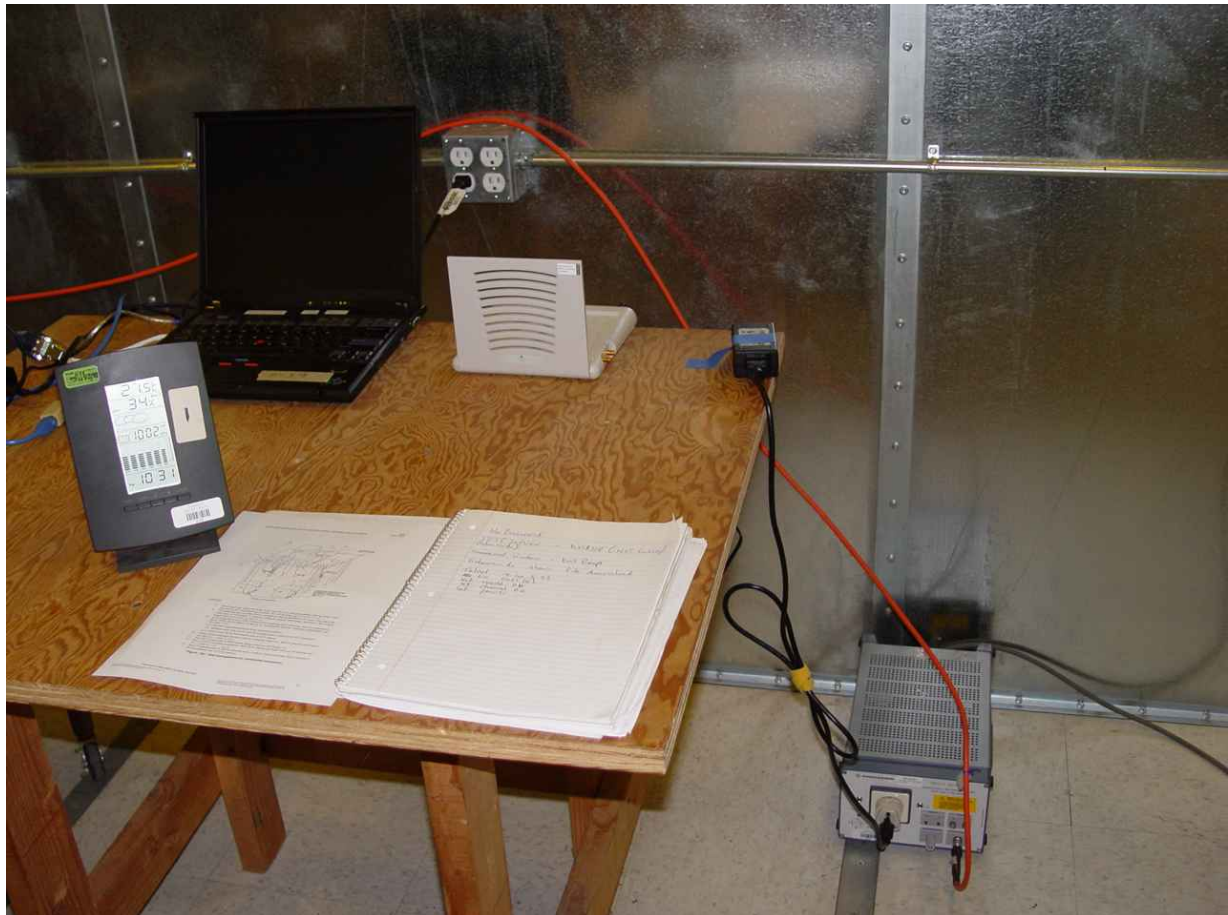

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.3. General Measurement Test Set-Up



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Aruba AP-70 802.11 a/b/g Wireless AP
To: FCC 47 CFR Part15.247
Serial #: ARUB13-A2 Rev A
Issue Date: 20th July 2007
Page: 132 of 133

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0193	EMI Receiver	Rhode & Schwartz	ESI 7	838496/007
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com